

**General Business Use**

**AT90SC13612RCU**

**EAL5+**

**Security Target Lite**



## Important notice to readers...

Atmel makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

The security of any system in which the product is used will depend on the system's security as a whole. Where security or cryptography features are mentioned in this document this refers to features which are intended to increase the security of the product under normal use and in normal circumstances.

All products are sold subject to Atmel's Terms & Conditions of Supply and the provisions of any agreements made between Atmel and the Customer. In ordering a product covered by this document the Customer agrees to be bound by those Terms & Conditions and agreements and nothing contained in this document constitutes or forms part of a contract (with the exception of the contents of this Notice). A copy of Atmel's Terms & Conditions of Supply is available on request.

© Atmel Corporation 2009

---

<b>Section 1</b>	AT90SC13612RCU Security Target Lite .....	9
	1.1 Identification.....	9
	1.2 Overview.....	9
	1.3 Common Criteria Conformance Claim.....	12
	1.4 Document Objective .....	12
	1.5 Document Structure .....	12
	1.6 Scope and Terminology.....	13
	1.7 References .....	13
	1.8 Revision History.....	14
<hr/>		
<b>Section 2</b>	Target of Evaluation Description.....	15
	2.1 Product Type .....	15
	2.2 Smartcard Product Life-cycle.....	22
	2.3 TOE Environment .....	25
	2.4 TOE Logical Phases .....	27
	2.5 TOE Intended Usage .....	27
	2.6 General IT Features of the TOE .....	29
<hr/>		
<b>Section 3</b>	TOE Security Environment.....	31
	3.1 Assets .....	31
	3.2 Assumptions .....	33
	3.3 Threats.....	35
	3.4 Organizational Security Policies .....	40
<hr/>		
<b>Section 4</b>	Security Objectives.....	43
	4.1 Security Objectives for the TOE.....	43
	4.2 Security Objectives for the Environment.....	49



---

<b>Section 5</b>	TOE Security Functional Requirements .....	51
	5.1 TOE Functional Requirements.....	51
	5.2 TOE Security Assurance Requirements .....	67

---

<b>Section 6</b>	TOE Summary Specification.....	69
	6.1 TOE Security Functions .....	69
	6.2 TOE Assurance Measures.....	76

---

<b>Section 7</b>	PP Claims .....	79
	7.1 PP Reference.....	79
	7.2 PP Refinements.....	79
	7.3 PP Additions .....	79

---

<b>Appendix A</b>	Glossary.....	81
-------------------	---------------	----

---

<b>Appendix B</b>	AT90SC13612RCU Life Cycle Addresses.....	85
-------------------	------------------------------------------	----



Figure 2-1 AT90SC13612RCU Block Diagram ..... 16

Figure 2-2 Smartcard Product Life Cycle ..... 24

Figure 3-1 Assumptions..... 33

Figure 3-2 Standard Threats ..... 35

Figure 3-3 Specific Threat ..... 35

Figure 3-4 Attack Model for the TOE ..... 36

Figure 3-5 Organizational Security Policies..... 40

Figure 4-1 Standard Security Objectives ..... 44

Figure 4-2 Security Objectives Related to Specific Functionality ..... 44

Figure 5-1 Standard Security Functional Requirements..... 51

Figure 5-2 Security Functional Requirements related to Specific Functionality ..... 52





Table 2-1	Classic and XP Write modes.....	18
Table 2-2	Smartcard Product Life-cycle .....	22
Table 2-3	Phases 4 to 7 Product Users .....	28
Table 5-1	EAL5 Package and Augmentation .....	67
Table 6-1	Relationship Between Assurance Requirements and Measures .....	76







---

## AT90SC13612RCU Security Target Lite

---

### 1.1 Identification

1 Title: AT90SC13612RCU Security Target Lite

2 Version: TPG0186A\_(17 Apr 09).

3 This Security Target has been constructed with Common Criteria (CC) Version 2.3.

---

### 1.2 Overview

---

#### Protection Profile Claims

4 This Security Target (ST) is conformant to the Protection Profile BSI-PP-002-2001, with additions taken from the Smartcard Integrated Circuit Augmentations BSI-AUG-2002:

---

Document	Title	Date
BSI-PP-002-2001	Smartcard IC Platform Protection Profile V1.0	July 2001
BSI-AUG-2002	Smartcard Integrated Circuit Platform Augmentations	March 2002

---

---

#### Project Derivation

5 It is for a microcontroller (MCU) device with security features. The device is a member of a family of single chip MCU devices which are intended for use within Smartcard products. The family codename is AT90SC and the 'parent' device of the family, the initial device in the family was the AT90SC19264RC part number, certified under the French CC scheme, Ref. 2002/04.



**Project Information:**

		Identifier
Part Number	AT90SC13612RCU	
Product Identification Number	AT58U30	SN_0 = 0x32 *
Revision	C	SN_1 = 0x02 *
Atmel Toolbox Version <sup>+</sup>	00.03.10.00	0x00031000 *
	00.03.13.00	0x00031300 *



Note

+ The AT90SC13612RCU device can be delivered by Atmel with 2 different toolbox versions.

Toolbox **00.03.10.00** contains the full Atmel Toolbox, **with cryptographic functionality and AIS31 test commands.**

The version **00.03.13.00** contains **only the AIS31 test commands.**

For purposes of this evaluation 00.03.13.00 is considered a **subset** of the 00.03.10.00 Atmel toolbox. Section 2 of this document gives full details of the two toolbox versions.



Note

As detailed in [GEN\_TD] [TD] the TOE is identified using the Serial Number Registers SN\_0 gives the identification of the Chip ID of the TOE, SN\_1 gives the revision identifier of the TOE.

For the Atmel toolbox the version number is outputted by the TOE when the TBX self test function is executed [TBX\_10] [TBX\_13].

**Assurance Level**

- 6 The TOE is being evaluated against the CC Smartcard IC Platform Protection Profile (BSI-PP-002-2001) to Evaluation Assurance Level 5 (EAL5) augmented with AVA\_VLA.4, ALC\_DVS.2 and AVA\_MSU.3 under the Common Criteria scheme.



---

**Sponsor**

- 7 Atmel Smart Card ICs, a division of ATMEL Corporation, is the developer and the sponsor for the AT90SC evaluations.

Atmel Corporation  
3235 Orchard Parkway  
San Jose  
CA95131  
USA

---

**Evaluation Scheme**

- 8 The TOE is evaluated under the French CC Scheme

DCSSI  
Bureau Certification  
51 boulevard de La Tour-Maubourg  
75700 Paris 07 SP  
FRANCE

---

**Evaluator**

- 9 The TOE is independently verified by the following Test facility (ITSEF), registered with the French CC Scheme.

Serma Technologies  
30 Avenue Gustave Eiffel  
33608 PESSAC Cedex  
France

---

**Brief TOE Description**

- 10 The TOE is a member of the AT90SC Enhanced Security family of products certified to EAL5 using the Common Criteria Methodology, this family of devices is referenced as AT90SC ASL5.

- 11 The devices in the AT90SC ASL5 family are based on the AVR RISC family of single-chip microcontroller devices. The AVR RISC family, with designed-in security features, is based on the industry-standard AVR low-power HCMOS core and gives access to the powerful instruction set of this widely used device. AT90SC ASL5 devices are equipped with Flash, RAM, ROM and EEPROM, cryptographic coprocessors, and a host of security features to protect device assets, making them suitable for a wide range of smartcard applications.



---

### 1.3 Common Criteria Conformance Claim

12 This Security Target is conformant to parts 2 and 3 of the Common Criteria, V2.3, as follows:

- Part 2 extended: the security functional requirements are based on those identified in part 2 of the Common Criteria, the additional security functional requirements are defined in BSI-PP-002-2001 Protection Profile.
- Part 3 conformant: the security assurance requirements are in the form of an EAL (assurance package) that is based upon assurance components in part 3 of the Common Criteria (CC). The augmentations used are also taken from part 3 of the Common Criteria.

---

### 1.4 Document Objective

13 The purpose of this document is to satisfy the Common Criteria (CC) requirements for a Security Target; in particular, to specify the security requirements and functions, and the assurance requirements and measures, in accordance with Protection Profile BSI-PP-002-2001, Smartcard IC Platform Protection Profile, and including augmentations from, Smartcard Integrated Circuit Platform Augmentations.

---

### 1.5 Document Structure

Section 1 introduces the Security Target, and includes sections on terminology, references and main actors.

Section 2 contains the product description and describes the TOE as an aid to the understanding of its security requirements and addresses the product type, the intended usage and the general features of the TOE.

Section 3 describes the TOE security environment.

Section 4 describes the required security objectives.

Section 5 describes the TOE security functional requirements.

Section 6 describes the TOE security functions.

Section 7 describes the Protection Profile (PP) claims..

Appendix A provides a glossary of the terms and abbreviations.

Appendix B Lists the AT90SC13612RCU Life Cycle Addresses



---













## 1.6 Scope and Terminology

- 14 Security objectives are defined herein with labels in the form O.xx\_xx. These labels are used elsewhere for reference. Similarly, modes, assets, subjects, threats, assumptions and organizational security policy are defined with labels of the form M.xx\_xx, D.xx\_xx, S.xx\_xx, T.xx\_xx, A.xx\_xx, and P.xx\_xx respectively.
- 15 Hexadecimal numbers are prefixed by 0x, e.g. 0xFF is 255 decimal. Binary numbers are prefixed by %, e.g. %0001 1011 is decimal 27. An integer value may be expressed as a hexadecimal, binary or decimal number, whichever form is the most convenient.







---

## 1.7 References

- 16 The AT90SC13612RCU Deliverables List (EDL) identifies the latest revision of the following documents, the EDL list details all the deliverables sent as evidence as part of the TOE evaluation.

-  [ESOF] AT90SC Strength of Security Functions Analysis
-  [DIGDES] Digital Design Specifications
-  [STI] Standard Test Interface
-  [GEN\_TD] AT90SC Generic Datasheet (TPR0255)
-  [TD] AT90SC13612RCU Technical Data (TPR0283)
-  [TestROMDD] Engineering Software Detailed Description
-  [TestROMUG] Engineering Software User Guide
-  [TMRE2] Production Test Software Detailed Description
-  [TMR-User] Production Test Software User Guide
-  [PME] Package Mode Test
-  [TBX\_10] Toolbox 3.10.x on AT90SCxxxxC Family with AdvX (TPR0259)
-  [TBX\_13] Using Toolbox Version 00.03.13.x on AT90SCxxxx (TPR0289)



-  [APP\_AdvX] AdvX for AT90SC Family (TPR0116)
-  [APP\_SCRY\_10] Securing Toolbox Operations using version 00.03.10.xx on ASL5 products (TPR0260)
-  [APP\_SCRY\_13] Securing Toolbox Operations using version 00.03.13.xx on ASL5 products (TPR0290)
-  [APP\_CRYPT] Efficient use of AdvX for Implementing Cryptographic Operations (TPR0142)
-  [WSR] Wafer Saw Recommendations (TPG0079)
-  [DIGDES] AT90SC13612RCU Digital Modules Design

Within this security target the above are referred to with the use of [ ] brackets, for example [WSR] refers to the document Wafer saw Recommendations, the ST user should refer to the this document for further information. Some documents listed above are only available to an ITSEF, the Composite product developer should refer to their ITSEF for guidance on what they require.

---

### 1.8 Revision History

Rev	Date	Description	Originator
A	17 Apr 09	Initial release	John Boggie



---

## Target of Evaluation Description

- 17 This part of the Security Target (ST) describes the Target of Evaluation (TOE) as an aid to the understanding of its security requirements and address the product type, the intended usage and the general features of the TOE.

---

### 2.1 Product Type

- 18 The TOE is the single chip microcontroller unit to be used in a smartcard product. Specifically, the TOE is the AT90SC13612RCU device from the AT90SC family of smartcard devices. Generally, a smartcard product may include other optional elements (such as specific hardware components, batteries, capacitors, antennae) but these are not in the scope of this Security Target.
- 19 The devices in the AT90SC family are based on ATMEL's AVR RISC family of single-chip microcontroller devices. The AVR RISC family, with designed-in security features, is based on the industry-standard AVR RISC low-power HCMOS core and gives access to the powerful instruction set of this widely used device. Different AT90SC family members offer various options. The AT90SC family of devices are designed in accordance with the ISO standard for integrated circuit cards (ISO 7816), where appropriate.
- 20 The TOE requires engineering embedded software to test the device and demonstrate certain security characteristics during the development phase. In the end-usage phase there will be no engineering embedded test software in the TOE. Production test software will be downloaded into the device EEPROM and be fully erased before devices leave the test environment. This production test software is only used in the testing phase of the TOE life cycle and is fully erased before disabling Test Mode, therefore this test software is outwith the scope of the evaluation. Test Mode disable is achieved by sawing the wafer.
- 21 Any faulty devices returned by a customer can be put into package mode. This allows the test engineer to access the EEPROM to analyse the failure. On entering package



mode the EEPROM is erased clearing any customer data, Package Mode only allows a limited set operations and inputs [PME].

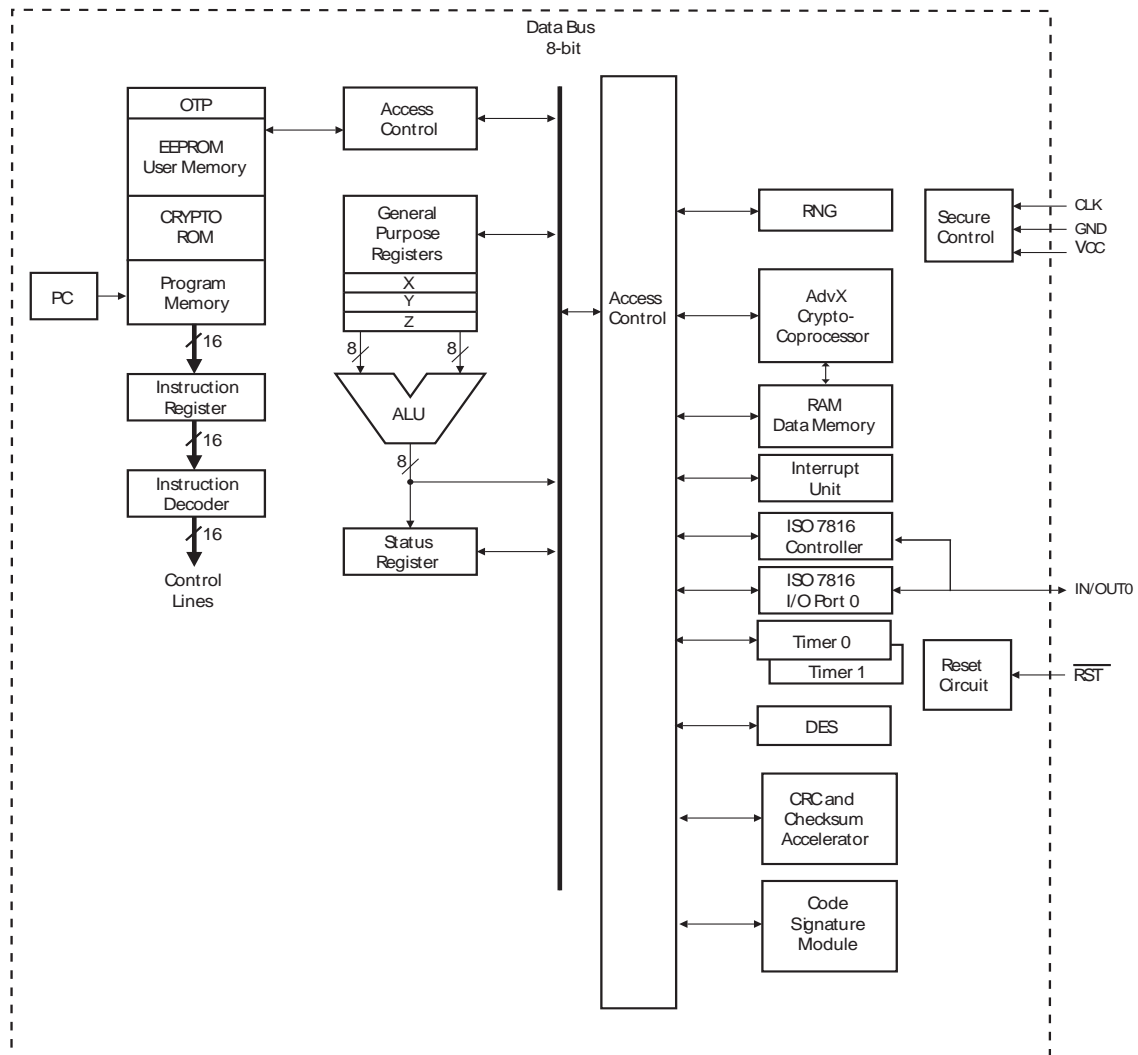


Figure 2-1 AT90SC13612RCU Block Diagram

22

Figure 2-1 shows the block diagram of the TOE, listed below is the features of the device.

**General**

- High performance, Low power secureAVR™ Core Enhanced RISC Architecture
  - 135 Powerful Instructions (Most executed in a Single Clock Cycle)
- Low power Idle and Power down Modes
- Bond Pad Locations Conforming to ISO 7816-2
- ESD Protection to ±6000V
- Operating Ranges: from 2.7V to 5.5V





### Memory

- 104K bytes ROM Program Memory
- 12K bytes EEPROM, Including 128 OTP bytes and 384-byte Bit-addressable bytes
  - 1 to 128-byte Program/Erase
  - 1.25ms Program, 1,25ms Erase
  - Endurance: 500,000 Write/Erase Cycles at 25°C
  - 10 Years Data Retention
- 4.5K bytes RAM memory
- 32K bytes of the ROM is dedicated to Atmel's Crypto Library [TBX]
- Memory Protection Unit / Firewall

### Peripherals

- One I/O Port
- One ISO 7816 Controller
  - Up to 625 kbps at 5Mhz
  - Compliant with T=0 and T=1 Protocols
- Programmable Internal Oscillator (Up to 30Mhz for AdvX and 30Mhz for internal CPU Clock)
- Two 16-bit Timers
- Random Number Generator
- 2-level Interrupt Controller
- Hardware DES and Triple DES (DPA/DEMA Resistant)
- Checksum Accelerator
- Code Signature Module
- CRC16 and 32 Engine (Compliant with ISO/IEC 3309)
- 32-bit Cryptographic Accelerator (AdvX for Public Key Operations)
  - To support SHA, RSA (**Only applicable to 00.03.10.00 version of the Toolbox**)

- 23 The TOE widely uses ATMEL high density non volatile memories.
- 24 The EEPROM includes a charge pump and its oscillator, security encoding bytes (scrambling keys, security configuration bytes), but also some chip traceability information and a transport code.
- 25 The NVM can be operated in two ways Classic and XP operating mode.
- 26 Expert (XP) System allows the NVM to be written by page and erase block, full page or partial page. A smart write feature is also available to avoid non-allowed actions [TD].



27 Table Table 2-1 gives a summary of the write modes for the two operating modes.

	Write Modes Classic	Write Modes XP
<b>Standard EEPROM</b>	Page mode with autoerase	Erase + Write
	Page mode without autoerase	Write only
	Byte mode with autoerase	Full page erase
	Byte mode without autoerase	Partial page erase
	Erase only	Block erase
<b>Bit Addressable</b>	Page mode with autoerase	Erase + Write
	Page mode without autoerase	Write only
	Byte mode with autoerase	Full page erase
	Byte mode without autoerase	Partial page erase
	Erase only	Block erase
	Pseudo bit by page	Bit write
	Pseudo bit by byte	
<b>Byte Writable OTP</b>	Pseudo bit by byte	Write only

Table 2-1 Classic and XP Write modes



Note

XP and Classic modes deals only with writing to the NVM block, it does not change the security of the TOE or modify the access control policy. Classic mode is a historical feature to allow customers to port older Smartcard Embedded Software to newer AT90SC devices (that is Smartcard Embedded Software not compatible with the XP write features).

28 The TOE has a 32-bit Cryptographic Accelerator (AdvX) with its 32K-byte Crypto ROM this can be loaded with either the ATMEL Toolbox library (ATMEL ROM or ATMEL crypto ROM), or it can be loaded with the Customer Proprietary crypto library.

29 The Atmel Toolbox for the AT90SC13612RCU project is available in two versions, 00.03.10.00 and 00.03.13.00. The 00.03.10.00 is the full version of the Atmel toolbox library.

**00.03.10.00 Atmel Toolbox**

30 The Atmel Toolbox [TBX] 00.03.10.00, software library allowing fast cryptographic algorithm implementations (RSA, SHA-1, Prime Generation,...) on the AdvX. The cryptographic library is stored in an 32K byte ROM. A crypto library [TBX] with cryptographic primitives (such as modular exponentiation) is provided by ATMEL.



Note

The **full cryptographic functionality** is only available when the TOE includes the **00.03.10.00** version of the Atmel Toolbox.  
The version **00.03.13.00** version **only contains the AIS31 test functions.**



31 The Atmel Toolbox contains functions used to test the Random Number Generator. The test functions contribute to the TOE Security Function SF4 RNG (section 6) and are therefore within the scope of the evaluation. The test routine and subservices are detailed in [APP\_RNG\_ENT].

32 The TOE shall also provide software cryptographic primitives to ease the customer proprietary software implementation of these algorithms.

---

#### 00.03.13.00 Atmel Toolbox

33 Toolbox 00.03.13.00, is a subset of the 00.03.10.00 Toolbox. This toolbox only contains the test routines and subservices associated with TSF SF4 RNG. **Therefore Toolbox 00.03.13.00 can be considered as simplified version of 00.03.10.00.**

---

#### Customer Toolbox

34 The customer may provide a proprietary cryptographic library to be implemented instead. If the customer wish to supply their own cryptographic library, Atmel give guidance on how to maintain the security level of the TOE through customer guidance notes [APP\_AdvX] and [APP\_CRYPT]. Therefore, part of this ROM memory can be considered as User ROM memory

35 The TOE includes security logic comprising detectors which monitor voltage, frequency, temperature and light exposure.

36 The TOE includes a powerful Firewall (Memory protection Unit) that protects all memories, peripheral and IO register accesses.

37 The TOE also includes dedicated test structures, sawn at dicing, that provide production test access, compatible with the TOE security requirements. Once test mode has been disabled by wafer saw the only other way to access the EEPROM test modes is to enter package mode, this is restricted mode and does not have all the features of test mode, Package mode is within the scope of the evaluation.

38 Some configuration options can be chosen by the customer at product order.

39 The TOE is manufactured in a low voltage (1.8V +/- 0.3V) CMOS process. The device will operate at a supply voltage of 2.7V to 5.5V, with the internal supply regulated to the required operating voltage.

40 The smartcard embedded software delivered by the software developer for the device comprises CPU ROM, CPU EEPROM and CPU OTP EEPROM. This smartcard embedded software is outwith the scope of the evaluation.

---

#### TOE Interfaces

41 The TOE interfaces consist of:

- The physical surface of the circuit,
- The ISO7816-3 electrical contacts (VCC, GND, CLK, RST, I/O0),


















- The software interface to the hardware component through memories and registers,
- The interface between the Software Toolbox (contained in ROM) and the hardware AdvX

---




#### Customer Software Guidance Documents

42

The guidance documents applicable for the development of the smartcard embedded software for this TOE are:

-  [TD] AT90SC13612RCU Technical Data (TPR0283)
-  [GEN\_TD] AT90SC Generic Datasheet (TPR0255)
-  [AM\_IS] AT90SC Addressing Modes and Instruction Set (1323)
-  [APP\_SEC] Security Recommendations AT90SC ASL5 Products (TPR0267)
-  [APP\_DES] Secure Hardware DES/TDES on the AT90SC ASL4 Products (TPR0063) +
-  [APP\_FWL] Using the Supervisor and User Mode in the AT90SC ASL4 Products (TPR0095) +
-  [APP\_RNG\_ENT] Generating Random Numbers with a controlled entropy on AT90SC family (TPR0166)
-  [TBX\_10] Using Toolbox Version 00.03.10.x (TPR0259)
-  [TBX\_13] Using Toolbox Version 00.03.13.x on AT90SCxxxx (TPR0289)
-  [APP\_AdvX] AdvX for AT90SC Family (TPR0116)
-  [APP\_SCRY\_10] Securing Toolbox Operations using version 00.03.10.xx on ASL5 products (TPR0260)
-  [APP\_SCRY\_13] Securing Toolbox Operations using version 00.03.13.xx on ASL5 products (TPR0290)
-  [APP\_CRYPT] Efficient use of AdvX for Implementing Cryptographic Operations (TPR0142)
-  [WSR] Wafer Saw Recommendations (TPG0079)
-  [APP\_CSM] The Code Signature Module (TPR0252)



-  [ERR\_TBX\_13] Toolbox 00.03.13.xx Errata Sheet (TPR0345)
-  [ERR\_TBX\_10] Toolbox 00.03.10.xx Errata Sheet (TPR0344)
-  [APP\_CRC] Checksum Accelerator Use on the AT90SC ASL4 Products (TPR0065)

43 The software developer should refer to the Certification report issued by DCSSI for the correct revisions of the documents stated above.



+ The guidance documents marked ASL4 are also applicable to the AT90SC ASL5 family

Note

### 2.1.1 Scope of Evaluation Summary

#### Part of the TOE

- AT90SC13612RCU Hardware device
- Atmel Security User Guidance as detailed on page 20
- The TOE interfaces as detailed in Section 41
- Phases 2-3 of the Life Cycle
- The Atmel Toolbox 00.03.10.00
- The Atmel Toolbox 00.03.13.00 (this can be considered a subset of 00.03.10.00)
- Atmel Toolbox Cryptographic functions (**when using version 00.03.10.00 of the Toolbox**)

#### Outwith the TOE

- Software loaded during Phase 2-3, used to test the TOE
- Customer Toolbox code
- Phases 1 and 4-7 of the Life Cycle



## 2.2 Smartcard Product Life-cycle

44 The smartcard product life-cycle consists of 7 phases where the following authorities are involved

Table 2-2 Smartcard Product Life-cycle

<b>Phase 1</b>	Smartcard software development	The smartcard software developer is in charge of the smartcard embedded software development and the specification of IC pre-personalization requirements,
<b>Phase 2</b>	IC Development	The IC designer designs the IC, develops IC dedicated software, provides information, software or tools to the smartcard software developer, and receives the software from the developer, through trusted delivery and verification procedures. From the IC design, IC dedicated software and smartcard embedded software, the IC designer constructs the smartcard IC database, necessary for the IC photomask fabrication.
<b>Phase 3</b>	IC manufacturing and testing	The IC manufacturer is responsible for producing the IC through three main steps: <ul style="list-style-type: none"> <li>■ IC manufacturing</li> <li>■ IC testing</li> <li>■ IC pre-personalization</li> </ul>
<b>Phase 4</b>	IC packaging and testing	The IC packaging manufacturer is responsible for the IC packaging and testing.
<b>Phase 5</b>	Smartcard product finishing process	The smartcard product manufacturer is responsible for the smartcard product finishing process and testing.
<b>Phase 6</b>	Smartcard personalization	The personalizer is responsible for the smartcard personalization and final tests. Other application software may be loaded onto the chip at the personalization process.
<b>Phase 7</b>	Smartcard end-usage	The smartcard issuer is responsible for the smartcard product delivery to the smartcard end-user, and the end of life process.

### Life Cycle Definition

45 The limits of the evaluation correspond to phases 2 and 3, including the phase 1 delivery and verification procedures and the TOE delivery to the IC packaging manufacturer ; procedures corresponding to phases 4, 5, 6 and 7 are outside the scope of the Security Target.



- 46 Nevertheless, in certain cases, it would be of great interest to include the phase 4 (IC packaging and testing), within the limits of the TOE. However, for the time being, this option remains outside the scope of this Security Target.
- 47 Figure 2-2 describes the Smartcard product life-cycle. Appendix B contains the addresses of the relevant organizations.



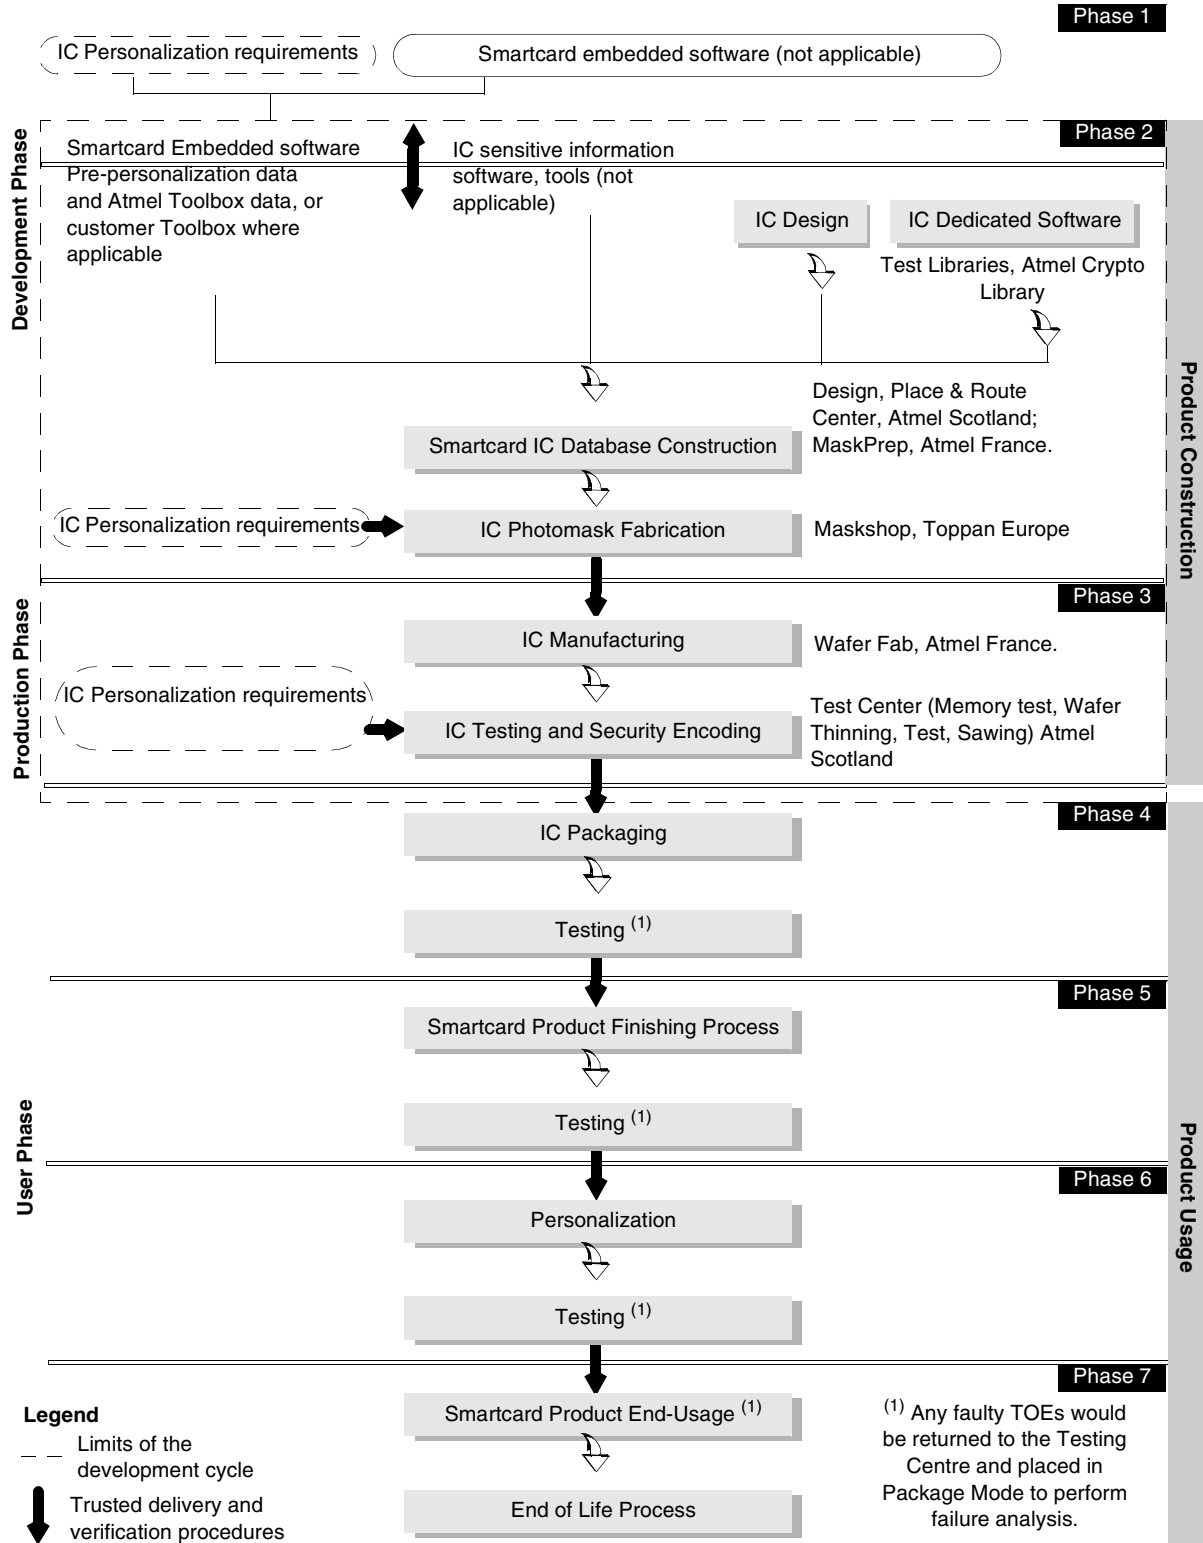


Figure 2-2 Smartcard Product Life Cycle





---

### Secure Delivery Between Phases

48 These different phases may be performed at different sites; procedures on the delivery process of the TOE shall exist and be applied for every delivery within a phase or between phases. This includes any kind of delivery performed from phase 1 to phase 7, including:

- Intermediate delivery of the TOE or the TOE under construction within a phase
- Delivery of the TOE or the TOE under construction from one phase to the next

49 These procedures shall be compliant with the assumption [A.Process-Card] developed in Section 3.2.

50 Although the return of faulty TOEs is applicable to Phases 4-7 therefore outwith the scope of the evaluation, the fact that Package mode is controlled by hardware means that Package mode is within the scope of the evaluation.

---

## 2.3 TOE Environment

51 Considering the TOE, three types of environments are defined:

- Development environment corresponding to phase 2
- Production environment corresponding to phase 3
- User environment, from phase 4 to phase 7

### 2.3.1 TOE Development Environment

52 To assure security, the environment in which the development takes place is made secure with controllable accesses having traceability. Access to the development building is strictly monitored by a security person. Visitors must sign a log book and record the time of arrival and time of departure to the building. All visitors are escorted by authorized personnel at all times. All authorized personnel involved fully understand the importance and the rigid implementation of the defined security procedures.

53 The development begins with the TOE's specification. All parties in contact with sensitive information are required to abide by Non-Disclosure Agreements.

54 Design and development of the IC then follows. The design engineer uses appropriate software tools with the necessary password controls to make his schematic entry/RTL descriptions, design simulations, verifications and generation of the TOE's IC photomask databases (design center addresses can be found in Appendix B). Sensitive documents, databases on tapes, diskettes, and circuit layout information are stored in appropriate locked cupboards and safes. Disposal of unwanted confidential data is carried out by shredding (paper documents) or complete electronic erasures (electronic documents, databases).



55 Reticles and photomasks are generated from the verified IC database. These are manufactured by Maskshop (see address in Appendix B), for wafer fab processing undertaken as per (see address in Appendix B). Data is transferred from the ATMEL design centre to the photomask manufacturer. The reticles and photomasks are then shipped in a secure manner to the wafer fab processing facilities.

### 2.3.2 TOE Production Environment

56 Production starts within the Wafer Fab; here the silicon wafers undergo diffusion processing in 25-wafer lots. Computer tracking at wafer level throughout the process is achieved by a based batch tracking system.

57 The tracking system is an on-line manufacturing system which monitors the progress of the wafers through the fabrication cycle. After fabrication the wafers are tested for memory wake-up, then, sent to Test Center (see Appendix B) where they are thinned to a pre-specified thickness and tested. The TOE is then tested to assure conformance with the device specification. During the IC testing, security encoding is performed where some of the EEPROM bytes are programmed with the unique traceability information, and the customer software is loaded in the EEPROM if required.

58 The wafers are inked to separate the functional ICs from the non-functional ICs. Finally, the wafers are thinned, sawn and then shipped to the customer.



The TOE is thinned to a thickness of 150 µm.

Note

### 2.3.3 TOE User Environment

59 The TOE user environment is the environment of phases 4 to 7.

60 At phases 4, 5, and 6, the TOE user environment is a controlled environment.

61 Following the sawing step, the wafers are split into individual dies. The good ICs are assembled into modules in a module assembly plant.

62 Further testing is carried out followed by the shipment of the modules to the smartcard product manufacturer (embedder) by means of a secure carrier.

63 Additional testing occurs followed by smartcard personalization, retesting and then delivery to the smartcard issuer.

---

**End-user environment (Phase 7)**

64 Smartcards are used in a wide range of applications to assure authorized conditional access. Examples of such are Pay-TV, Banking Cards, Portable communication SIM cards, Health cards, Transportation cards.

65 Therefore, the user environment covers a wide spectrum of very different functions, thus making it difficult to avoid or monitor any abuse of the TOE.

---

**2.4 TOE Logical Phases**

66 During its construction usage, the TOE may be under several life logical phases. These phases are sorted under a logical controlled sequence. The change from one phase to the next shall be under the TOE control.

---

**2.5 TOE Intended Usage**

67 The TOE can be incorporated in several applications such as:

- Banking and finance market for credit/debit cards, electronic purse (stored value cards) and electronic commerce.
- Network based transaction processing such as mobile phones (GSM SIM cards), pay-TV (subscriber and pay-per-view cards), communication highways (Internet access and transaction processing).
- Transport and ticketing market (access control cards).
- Governmental cards (ID-cards, healthcards, driver license etc).
- Multimedia commerce and Intellectual Property Rights protection.


68 During the phases 1, 2, 3, the product is being developed and produced. The administrators are the following:

- The smartcard embedded software developer
- The smartcard IC designer
  - The Atmel toolbox [TBX] is developed during Phase 2 of the product life cycle.
- The IC manufacturer

69 Table 2-3 lists the users of the product during phases 4 to 7.



Table 2-3 Phases 4 to 7 Product Users

<b>Phase 4</b>	<ul style="list-style-type: none"> <li>■ Packaging manufacturer (administrator)</li> <li>■ Smartcard embedded software developer</li> <li>■ System integrator, such as the terminal software developer</li> </ul>
<b>Phase 5</b>	<ul style="list-style-type: none"> <li>■ Smartcard product manufacturer (administrator)</li> <li>■ Smartcard embedded software developer</li> <li>■ System integrator, such as the terminal software developer</li> </ul>
<b>Phase 6</b>	<ul style="list-style-type: none"> <li>■ Personalizer (administrator)</li> <li>■ Customers who, before manufacture, determine the MCU's mask options and the initial memory contents (i.e. the application program), and who, after manufacture, incorporate the MCU into devices. Customers are trusted and privileged users.</li> <li>■ Smartcard issuer (administrator).</li> <li>■ Smartcard embedded software developer.</li> <li>■ System integrator, such as the terminal software developer.</li> </ul>
<b>Phase 7</b>	<ul style="list-style-type: none"> <li>■ Smartcard issuer (administrator)</li> <li>■ Smartcard end-user, who use devices incorporating the MCU. End-users are not trusted and may attempt to attack the MCU.</li> <li>■ Smartcard software developer.</li> <li>■ System integrator, such as the terminal software developer.</li> </ul>
	<div style="display: flex; align-items: center;">  <p><small>Note</small> The IC manufacturer and the smartcard product manufacturer may also receive ICs for analysis, should problems occur during the smartcard usage.</p> </div>

70 The MCU may be used in the following modes:

- a) M.TEST\_MODE: Test mode, in which the MCU runs under the control of dedicated test software written to EEPROM via a test interface, and in conjunction with stimulus provided by an external test system. This mode is intended to be used solely by authorized development staff.
- b) M.USER\_MODE: User mode, in which the MCU runs under control of the smartcard embedded software. It is intended that customers and end-users will always use the MCU in user mode.

71 During the initial part of the manufacturing process, the MCU is set to M.TEST\_MODE mode. Authorized development staff then test the MCU. After testing, M.TEST\_MODE mode is permanently disabled by sawing, and the MCU is set to M.USER\_MODE mode.



72 M.PACKAGE\_MODE: Package Mode is a mode similar to Test Mode for testing returns from Phases 4-7. M.PACKAGE\_MODE runs a limited subset of test commands via the ISO pads. This mode is intended to be used solely by authorized Atmel staff. It is not possible to change any of the security settings in M.PACKAGE\_MODE.

73 If a faulty TOE is returned from the field then analysis can be done either in M.USER\_MODE, or M.PACKAGE\_MODE by an authorized test engineer.

74 The only modes of operation are those stated in paragraph 70 and 72.

75 Once manufactured, the MCU operates by executing the smartcard embedded software, which is stored in MCU ROM. The contents of the MCU ROM cannot be modified, whereas the contents of the EEPROM can, in general, be written to or erased, under the control of the smartcard embedded software.

76 After an MCU reset, the contents of the RAM are wiped away (except 32 bytes of protected RAM).

77 The ISO7816 compliant I/O port can be used to pass data to or from the MCU. The application program determines how to interpret the data.

---

## 2.6 General IT Features of the TOE

78 The TOE IT functionalities consist of tamper resistant data storage and processing such as:

- Arithmetic functions (e.g. incrementing counters in electronic purses, calculating currency conversion in electronic purses)
- Data communication
- Cryptographic operations (e.g. random number generation, data encryption, digital signature verification)





---

## TOE Security Environment

79 This section describes the security aspects of the environment in which the TOE is intended to be used, and addresses the description of the assets to be protected, the assumptions, the threats, and the organizational security policies.

80 The environment elements are derived from BSI-PP-002-2001 and adapted to the AT90SC13612RCU TOE to cover all the phases of the TOE life cycle, and also the delivery from one phase to another.

---

### 3.1 Assets

#### 3.1.1 Assets regarding the Threats

81 Assets are security relevant elements of the TOE that include the Primary and Secondary assets.

---

##### Primary Assets

- User application data (D.xxx\_DATA) of the TOE comprising the IC pre-personalization requirements, located in:
  - CPU ROM (D.CPU\_ROM\_DATA),
  - CPU EEPROM (D.CPU\_EEPROM\_DATA),
  - Crypto ROM (D.CRYPTO\_ROM\_DATA),
  - CPU RAM (D.CPU\_RAM\_DATA),
  - CRYPTO RAM (D.CRYPTO\_RAM\_DATA),
  - Peripherals/IO Registers (D.PERIPH\_REG\_DATA),

The User data can be subject to manipulation and disclosure while being stored or processed by the TOE.

- Smartcard embedded software (D.xxx\_SOFT) located in:
  - CPU ROM (D.CPU\_ROM\_SOFT),
  - CPU EEPROM (D.CPU\_EEPROM\_SOFT),
  - Crypto ROM (D.CRYPTO\_ROM\_SOFT)

Smartcard Embedded software needs to be protected to prevent manipulation and disclosure.

- IC dedicated software (D.xxx\_DSOF) located in:



- CPU ROM (D.CPU\_ROM\_DSOF),
- CPU EEPROM (D.CPU\_EEPROM\_DSOF),
- Crypto ROM (D.CRYPTO\_ROM\_DSOF)
- IC dedicated support software:
  - Random numbers generated by the TOE (D.RNG\_DATA)

82 Therefore, the TOE itself is an asset.

---

### Secondary Assets

83 There are many ways to manipulate or disclose the User Data:

1. An attacker may manipulate the smartcard Embedded Software or the TOE (Primary assets)
2. An attacker may cause malfunctions of the TOE or abuse Test Features provided by the TOE.

Such attacks usually require design information of the TOE to be obtained. Therefore, the design information is a secondary asset.

- IC specification (D.IC\_SPEC)
- Design (D.DESIGN)
- Development tools (D.DEV\_TOOLS)
- Technology (D.TECHNO)
- Photomasks (D.MASK)

84 The above secondary assets disclose the following information to an attacker and therefore need to be protected.

1. The circuitry of the IC (hardware including the physical memories)
2. The IC dedicated Software with the parts IC Dedicated Test software, and IC dedicated support software
3. The TSF data

85 Assets must be protected in terms of confidentiality and integrity.

---

### Grouping of Assets / Object Definition

86 These assets can be grouped to define objects that must be protected, which is useful for the following sections of this document.

- O1: CPU ROM: covering D.CPU\_ROM\_DATA, D.CPU\_ROM\_SOFT, D.CPU\_ROM\_DSOF,
- O2: CPU EEPROM: covering D.CPU\_E2PROM\_DATA, D.CPU\_E2PROM\_SOFT, D.CPU\_E2PROM\_DSOF,





- O3: Crypto ROM: covering D.CRYPTO\_ROM\_DATA, D.CRYPTO\_ROM\_SOFT, D.CRYPTO\_ROM\_DSOFT,
- O4: CPU RAM: covering D.CPU\_RAM\_DATA,
- O5: CRYPTO RAM: covering D.CRYPTO\_RAM\_DATA,
- O6: Peripherals and IO Registers: covering D.PERIPH\_REG\_DATA, D.RNG\_DATA,

87 Illegal address is defined as unmapped regions in the memory map, as listed in [TD] [GEN\_TD].


88 Illegal opcodes are defined as unmapped CPU opcodes, as listed in [AM\_IS].

---

### 3.2 Assumptions

89 This Security Target claims conformance to the BSI-PP-002-2001 “Smartcard IC Platform Protection Profile”, the assumptions defined in section 3.2 of the PP are valid for this security target and are listed below.

Figure 3-1 Assumptions

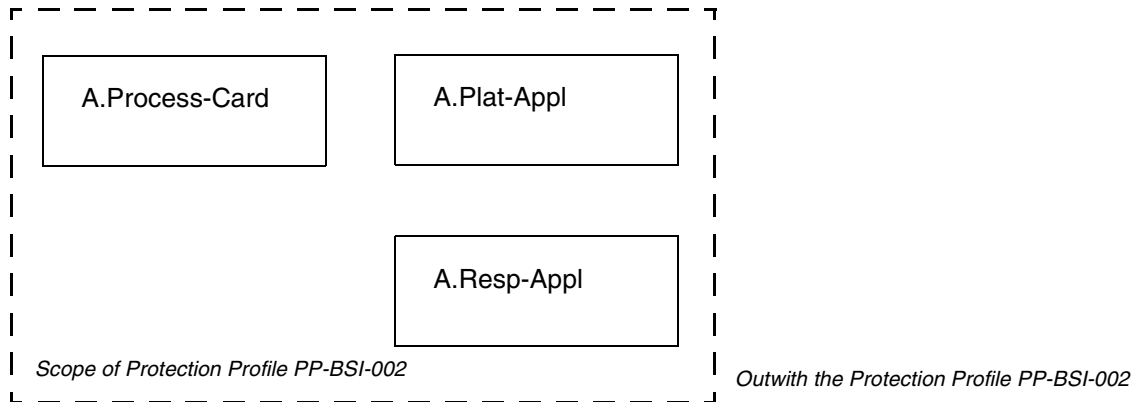

A.Plat-Appl

#### Usage of Hardware Platform

The Smartcard Embedded Software shall be designed according to the latest TOE user guidance as stated in Section 42. The Smartcard Embedded Software designer should also take into account the findings of the TOE evaluation report.

**Applies to Phase 1**



A.Resp-Appl

**Treatment of User Data**

User data is owned by the Smartcard Embedded Software. Therefore, it is assumed that security relevant User Data for example Cryptographic keys, are treated by the Smartcard Embedded Software according to the requirements of the specific end application.

**Applies to Phase 1**

A.Process-Card

**Protection during Packaging, Finishing and Personalisation**

It is assumed that security procedures are used after delivery of the TOE by the TOE Manufacturer up to delivery to the end-user to maintain confidentiality and integrity of the TOE. These procedures shall prevent any possible copy, modification, retention, theft or unauthorised use of the TOE or the system

**Applies to Phase 4-6**




### 3.3 Threats

90 This Security Target claims conformance to the BSI-PP-002-2001 “Smartcard IC Platform Protection Profile”, the threats defined in section 3.3 of the PP are valid for this security target and are listed below.

According to BSI-PP-002-2001, there are the following standard high-level security concerns


- SC1 Manipulation of User Data and of the Smartcard Embedded Software (while being executed/processed and while being stored in the TOE’s memories)
- SC2 Disclosure of User Data and of the Smartcard Embedded Software (while being processed and while being stored in the TOE’s memories)
- SC3 Deficiency of random numbers

91 The security concerns 1 and 2 give rise to the following threats:

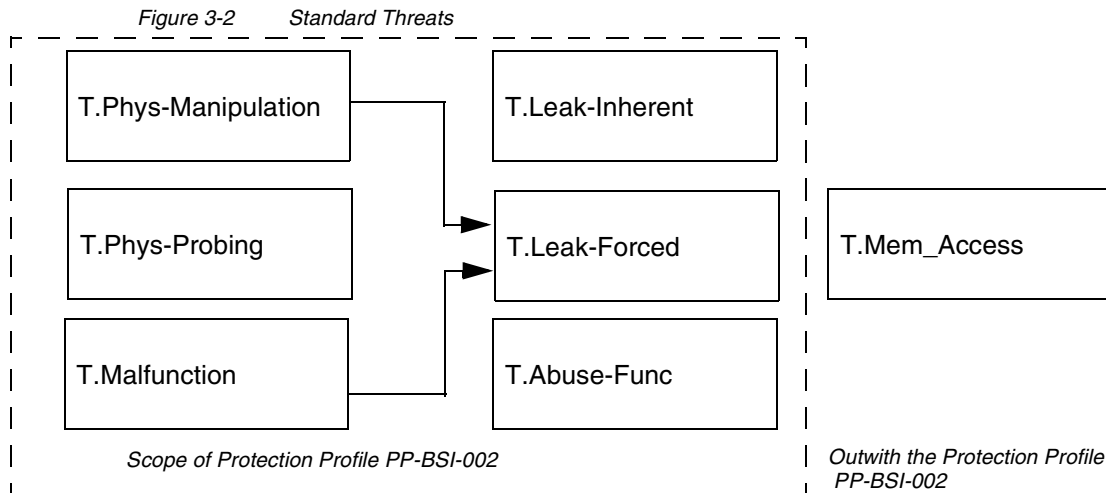


92 The security concern 3 gives rise to the following threat:

*Figure 3-3 Specific Threat*



93 The TOE is exposed to different types of influences or interactions with it's outside world. Some of them may result from just using the TOE, others may also indicate an attack. The different types of influences or interactions are shown in Figure 3-4.

Figure 3-4 Attack Model for the TOE

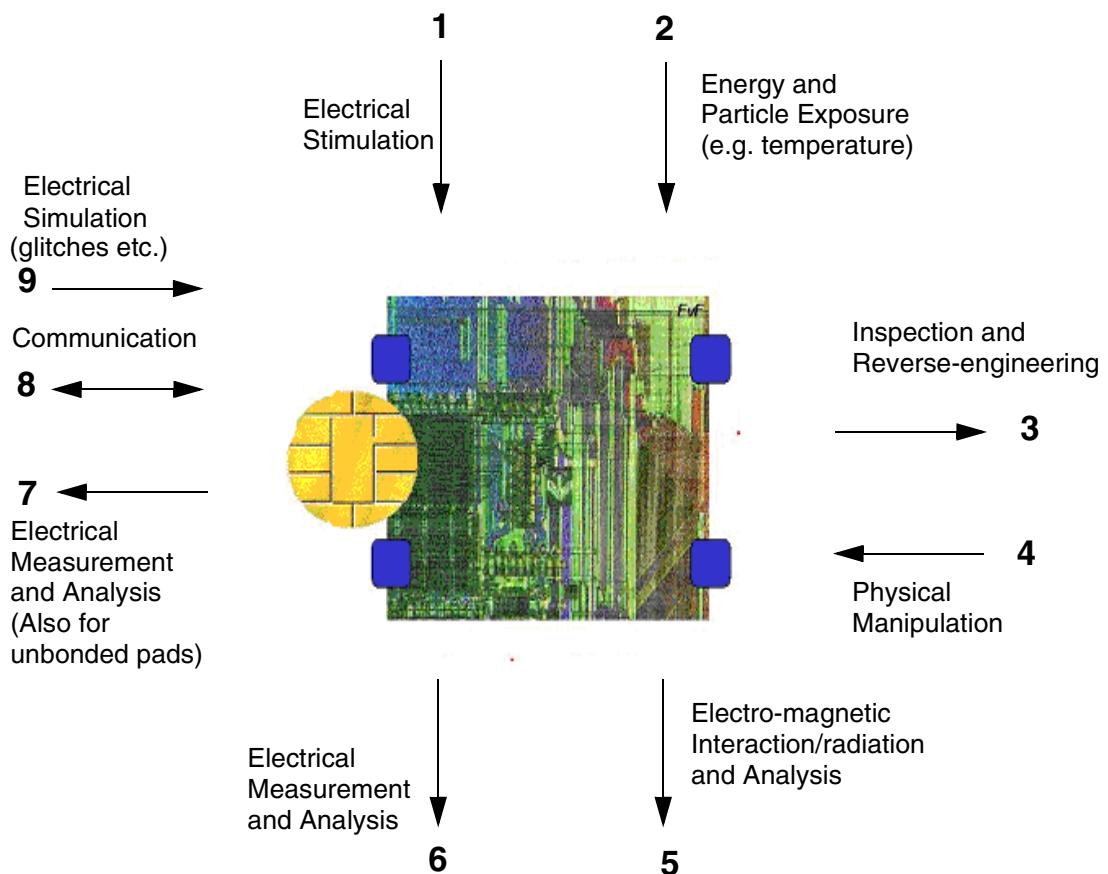

94 An interaction with the TOE can be done through the ISO interfaces (number 7-9 in Figure 3-4) which are realized using contacts. Influences or interactions with the TOE also occurs through the chip surface (number 1-6 in Figure 3-4). In number 1 and 6 galvanic contacts are used. In number 2 and 5 the influence (arrow directed to the chip) does not require a contact. Number 3 and 4 refer to specific situations where the TOE and it's functional behaviour is not only influenced but definite changes are made by applying mechanical, chemical and other methods (such as 1 and 2). Many attacks require a prior inspection and some reverse-engineering (number 3).



95 The Smartcard Embedded Software must contribute to averting the threats: At least it must not undermine the security provided by the TOE. For details refer to the assumptions regarding the Smartcard Embedded Software, specified in Section 3.2.

---

**Standard Threats (referring to SC1 and SC2).**

96 The TOE shall avert the threats listed below:

T.Leak-Inherent

**Inherent Information Leakage**

An attacker may exploit information which is leaked from the TOE during usage of the smartcard in order to disclose confidential data (User Data or TSF data).

No direct contact with the smartcard internal is required here. Leakage may occur through emanations, variations in power consumption, I/O characteristics, clock frequency, or by changes in processing time requirements. One example is the Differential Power Analysis (DPA). This leakage may be interpreted as a covert channel transmission but is more closely related to measurement of operating parameters, which may be derived either from direct (contact) measurements (numbers 6 and 7 Figure 3-4) or measurement of emanations (number 5) and can be related to the specific operation being performed.



T.Phys-Probing

**Physical Probing**

An attacker may perform physical probing of the TOE in order to:

- Disclose User Data
- Disclose/reconstruct the Smartcard Embedded Software
- Disclose other critical operational information especially TSF data

Physical probing requires direct interaction with the Smartcard Integrated Circuit internals (numbers 5 and 6 Figure 3-4). Techniques commonly employed in IC failure analysis and IC reverse engineering efforts may be used. Before hardware security mechanisms and layout characteristics need to be identified (number 3). Determination of software design including treatment of User Data may also be a prerequisite.

This pertains to “measurements” using galvanic contacts or any type of charge interaction whereas manipulations are considered under the threat “Physical Manipulation” (T.Phys-Manipulation). The threats “inherent Information Leakage” (T.Leak-Inherent) and “Forced Information Leakage” (T.Leak-Forced) may use physical probing but require complex signal processing in addition.

T.Malfunction

**Malfunction due to Environmental Stress**

An attacker may cause a malfunction of TSF or of the Smartcard Embedded Software by applying environmental stress in order to:

- Deactivate or modify security features or functions of the TOE
- Deactivate or modify security functions of the Smartcard Embedded Software

This may be achieved by operating the smartcard outside the normal operating conditions (numbers 1, 2 and 9 Figure 3-4).

To exploit this the attacker needs information about the functional operation.



## T.Phys-Manipulation

**Physical Manipulation**

An attacker may physically modify the smartcard in order to:

- Modify security features or functions of the TOE
- Modify security functions of the Smartcard Embedded Software
- Modify User Data

The modification may result in the deactivation of a security function. Before that hardware security mechanisms and layout characteristics need to be identified. Determination of software design including treatment of User Data may also be a pre-requisite. Changes of circuitry or data can be permanent or temporary.

In contrast to malfunctions (refer to T.Malfunction) the attacker requires to gather significant knowledge about the TOE's internal construction here (number 3 Figure 3-4).

## T.Leak-Forced

**Forced Information Leakage**

An attacker may exploit information which is leaked from the TOE during usage of the product in order to disclose confidential data (User Data, TSF data) even if the information leakage is not inherent but caused by the attacker.

This threat pertains to attacks where methods described in "Malfunction due to Environmental Stress" (refer to T.Malfunction) and/or "Physical Manipulation" (refer to T.Phys-Manipulation) are used to cause leakage from signals (numbers 5, 6, 7 and 8 Figure 3-4) which normally do not contain significant information about secrets.

## T.Abuse-Function

**Abuse of Functionality**

An attacker may use functions of the TOE which may not be used after TOE delivery in order to:

- Disclose or manipulate User Data
- Manipulate (explore, bypass, deactivate or change) security features or functions of the TOE or of the Smartcard Embedded Software
- Enable an attack

## T.Mem-Access

**Memory Access Violation**

Parts of the Smartcard Embedded Software may cause security violations by accidentally or deliberately accessing restricted data (which may include code). Any restrictions are defined by the security policy of the specific application context.



---

**Threats Related to Specific Functionality (referring to SC3)**

97 The TOE shall avert the threat below

T.RND

**Deficiency of Random Numbers**

An attacker may predict or obtain information about random numbers generated by the TOE for instance because of a lack of entropy of the random numbers provided.

An attacker may gather information about the reduced random numbers which might be a problem because they may be used for instance to generate cryptographic keys.

Here the attacker is expected to take advantage of statistical properties of the random numbers generated by the TOE without specific knowledge about the TOE's generator. Malfunctions or premature ageing are also considered which may assist in getting information about random numbers.


---

**3.4 Organizational Security Policies**

98 This Security Target claims conformance to the BSI-PP-002-2001 "Smartcard IC Platform Protection Profile", the Security Policy defined in section 3.2 of the PP is valid for this security target and is listed below.

99 The TOE may provide specific security functionality which can be used by the Smartcard Embedded Software. Particular specific security functionality may not necessarily be derived from threats identified for the TOE's environment because it can only be decided in the context of the smartcard application, against which threats the Smartcard Embedded Software will use the specific security functionality. Therefore, the necessity of some specific functionality may not derived from a threat. The Security organizational policies are shown in Figure 3-5.

*Figure 3-5 Organizational Security Policies*

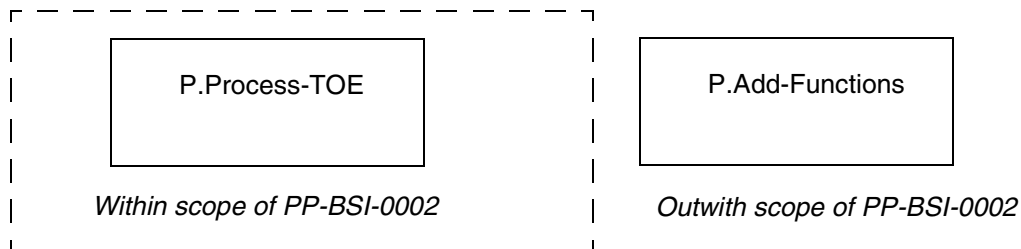



100 The TOE developer must apply the policy “Protection during TOE Development and Production” (P.Process-TOE) as specified below.

P.Process-TOE

**Protection during TOE Development and Production**

The TOE Manufacturer must ensure that the development and production of the Smartcard Integrated Circuit (Phase 2 up to TOE Delivery, refer to Section 2.2) is secure so that no information is unintentionally made available for the operational phase of the TOE. For example, the confidentiality and integrity of design information and test data shall be guaranteed; access to samples, development tools and other material shall be restricted to authorised persons only; scrap will be destroyed etc. This not only pertains to the TOE but also to all information and material exchanged with the developer of the Smartcard Embedded Software and therefore especially to the Smartcard Embedded Software itself. This includes the delivery (exchange) procedures for Phase 1 and the Phases after TOE Delivery as far as they can be controlled by the TOE Manufacturer.

101 The IC developer must apply the policy “Additional Specific Security Functionality” (P.Add-Functions) as specified below.

P.Add-Functions

**Additional Specific Security Functionality**

The TOE must provide the following specific security functionality to the Smartcard Embedded Software, according to accepted international standard:

- Triple Data Encryption Standard (TDES)
  
- Secure Hash Algorithm (SHA) \*
- Rivest-Shamir-Adleman (RSA) With CRT \*
- Rivest-Shamir-Adleman (RSA) Without CRT \*



Note

\* this security functionality is only available to the Smartcard Embedded Software when the TOE includes Toolbox version **00.03.10.00**. Therefore the version of the TOE with Toolbox **00.03.13.00** has no additional cryptographic functions, the only cryptographic function available to the user is TDES as this is a hardware function of the TOE.





---

## Security Objectives

102 The security objectives of the TOE contains the following sections:

- Security Objectives for the TOE
- Security Objectives for the Environment

---

### 4.1 Security Objectives for the TOE

According to this Security Target, there are the following standard high level security goals:


- SG1 Maintain the integrity of User Data and of the Smartcard Embedded Software (when being executed/processed and when being stored in the TOE's memories).
- SG2 maintain the confidentiality of User Data and of the Smartcard Embedded Software (when being processed and when being stored in the TOE's memories).

103 Though the Smartcard Embedded Software stored in ROM, will in many cases not contain secret data or algorithms, it must be protected from being disclosed, since for instance knowledge of specific implementation details may assist an attacker. In many cases critical User Data will be stored in the EEPROM.

104 These standard high-level security goals are refined below by defining security objectives as required by the Common Criteria (Figure 4-1). Note that the integrity of the TOE is a means to reach these objectives.



Figure 4-1 Standard Security Objectives

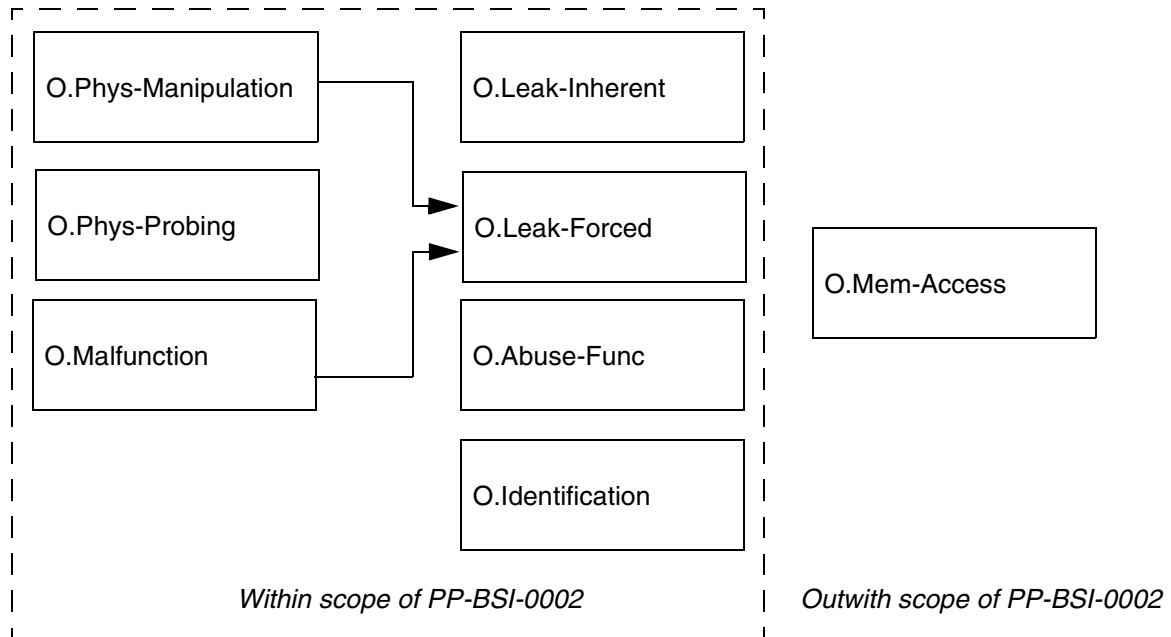


105 According to the security this security target there are the following high level security goals related to specific functionality:

SG3 Provide Random Numbers.

SG4 Provide additional security functionality.

106 The additional high level security considerations are refined below by defining security objectives as required by the Common Criteria.

Figure 4-2 Security Objectives Related to Specific Functionality

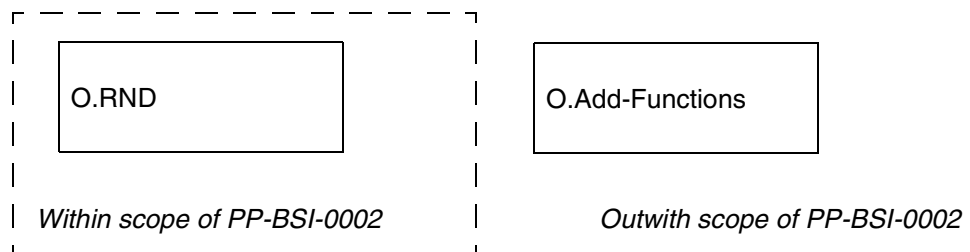

**Standard Security Objectives (referring to SG1 and SG2)**

107

The TOE shall provide protection on each of the Standard Security Objectives as listed below:

**O.Leak-Inherent****Protection Against Inherent Information Leakage**

The TOE must provide protection against disclosure of confidential data (User Data or TSF data) stored and/or processed in the smartcard IC

- By measurement and analysis of the shape and amplitude of signals (for example on the power, clock, or I/O lines) and
- By measurement and analysis of the time between events found by measuring signals (for instance on the power, clock, or I/O lines).

This objective pertains to measurements with subsequent complex signal processing whereas O.Phys-Probing is about direct measurements on elements on the chip surface. Details correspond to an analysis of attack scenarios which is not given here.

**O.Phys-Probing****Protection against Physical Probing**

The TOE must provide protection against disclosure of User Data, against the disclosure/reconstruction of the Smartcard Embedded Software or against the disclosure of other critical operational information. This includes protection against:

- Measuring through galvanic contacts which is direct physical probing on the chips surface except on pads being bonded (using standard tools for measuring voltage and current)
- Measuring not using galvanic contacts but other types of physical interaction between charges (using tools used in solid-state physics research and IC failure analysis)

with a prior

- Reverse-engineering to understand the design and its properties and functions

The TOE must be designed and fabricated so that it requires a high combination of complex equipment, knowledge, skill, and time to be able to derive detailed design information or other information which could be used to compromise security through such a physical attack.



O.Malfunction

**Protection against Malfunctions**

The TOE must ensure its correct operation.

The TOE must prevent its operation outside the normal operating conditions where reliability and secure operation has not been proven or tested. This is to prevent errors. The environmental conditions may include voltage, clock frequency, temperature, or external energy fields.

Remark: A malfunction of the TOE may also be caused using a direct interaction with elements on the chip surface. This is considered as being a manipulation (refer to the objective O.Phys-Manipulation) provided that detailed knowledge about the TOE's internal construction is required and the attack is performed in a controlled manner.

O.Phys-Manipulation

**Protection against Physical Manipulation**

The TOE must provide protection against manipulation of the TOE (including its software and TSF data), the Smartcard Embedded Software and the User Data. This includes protection against:

- Reverse-engineering (understanding the design and its properties and functions)
- Manipulation of the hardware and any data
- controlled manipulation of memory contents (User Data)

The TOE must be designed and fabricated so that it requires a high combination of complex equipment, knowledge, skill, and time to be able to derive detailed design information or other information which could be used to compromise security through such a physical attack.

O.Leak-Forced

**Protection against Forced Information Leakage**

The Smartcard must be protected against disclosure of confidential data (User Data or TSF data) processed in the Card (using methods as described under O.Leak?Inherent) even if the information leakage is not inherent but caused by the attacker.

- By forcing a malfunction (refer to "Protection against Malfunction due to Environmental Stress" (O.Malfunction))
- By a physical manipulation (refer to "Protection against Physical Manipulation" (O.Phys-Manipulation))

If this is not the case, signals which normally do not contain significant information about secrets could become an information channel for a leakage attack.



## O.Abuse-Func

**Protection against Abuse of Functionality**

The TOE must prevent that functions of the TOE which may not be used after TOE Delivery can be abused in order:

- To disclose critical User Data
- To manipulate critical User Data of the Smartcard Embedded Software
- To manipulate Soft-coded Smartcard Embedded Software
- To bypass, deactivate, change or explore security features or functions of the TOE

Details depend, for instance, on the capabilities of the Test Features provided by the IC Dedicated Test Software which are not specified here.

## O.Identification

**TOE Identification**

The TOE must provide means to store Initialisation Data and Pre-personalisation Data in its non-volatile memory. The Initialisation Data (or parts of them) are used for TOE identification.

## O.Mem-Access

**Area based Memory Access Control**

The TOE must provide the Smartcard Embedded Software with the capability to define restricted access memory areas. The TOE must then enforce the partitioning of such memory areas so that access of software to memory areas is controlled as required, for example, in a multi-application environment.



---

**Security Objectives Relating to Specific Functionality (referring to SG3 and SG4)**

108 The TOE shall provide protection on each of the Specific Functionality Security Objectives as listed below:

O.RND

**Random Numbers**

The TOE will ensure the cryptographic quality of random number generation. For instance random numbers shall not be predictable and shall have a sufficient entropy.

The TOE will ensure that no information about the produced random numbers is available to an attacker since they might be used for instance to generate cryptographic keys.

O.Add-Function

**Additional Specific Security Functionality**

The TOE must provide the following specific security functionality to the Smartcard Embedded Software:

- Triple Data Encryption Standard (TDES)
  
- Secure Hash Algorithm (SHA) \*
- Rivest-Shamir-Adleman (RSA) With CRT \*
- Rivest-Shamir-Adleman (RSA) Without CRT \*



\* this security functionality is only available to the Smartcard Embedded Software when the TOE includes Toolbox version **00.03.10.00**. Therefore the version of the TOE with Toolbox **00.03.13.00** has no additional cryptographic functions, the only cryptographic function available to the user is TDES as this is a hardware function of the TOE.



---

## 4.2 Security Objectives for the Environment

---

### Phase 1

109 The Smartcard Embedded Software shall provide for each of the Security Objectives for the Environment as stated below.

OE.Plat-Appl

#### **Usage of Hardware Platform**

To ensure that the TOE is used in a secure manner the Smartcard Embedded Software shall be designed so that the requirements from the following documents are met:

- Hardware data sheet for the TOE
- TOE application notes
- Findings of the TOE evaluation reports relevant for the Smartcard Embedded Software

OE.Resp-Appl

#### **Treatment of User Data**

Security relevant User Data (especially cryptographic keys) are treated by the Smartcard Embedded Software as required by the security needs of the specific application context.

For example the Smartcard Embedded Software will not disclose security relevant user data to unauthorised users or processes when communicating with a terminal.



---

**Phase 2 up to TOE Delivery**

110 The TOE manufacturer shall ensure that the Security Objective for the Environment is complied with as stated below.

OE.Process-TOE

**Protection during TOE Development and Production**

The TOE Manufacturer must ensure that the development and production of the Smartcard Integrated Circuit (Phases 2 and 3 up to TOE Delivery, Figure 2-2) is secure so that no information is unintentionally made available for the operational phase of the TOE. For example, the confidentiality and integrity of design information and test data must be guaranteed, access to samples, development tools and other material must be restricted to authorised persons only, scrap must be destroyed. This not only pertains to the TOE but also to all information and material exchanged with the developer of the Smartcard Embedded Software and therefore especially to the Smartcard Embedded Software itself. This includes the delivery (exchange) procedures for Phase 1 and the Phases after TOE Delivery as far as they can be controlled by the TOE Manufacturer.

An accurate identification must be established for the TOE. This requires that each instantiation of the TOE carries this unique identification. In order to make this practical, electronic identification shall be possible.

For a list of assets refer to Section 3.1.

---

**TOE Delivery up to the end of Phase 6**

111 Appropriate protection during packaging finishing and personalisation must be ensured after TOE Delivery up to the end of Phase 6, as well as during delivery to Phase 7 as specified below.

OE.Process-Card

**Protection during Packaging, Finishing and Personalisation**

Security procedures shall be used after TOE Delivery up to delivery to the end user to maintain confidentiality and integrity of the TOE and of its manufacturing and test data (to prevent any possible copy, modification, retention, theft or unauthorised use).

This means that Phases after TOE Delivery up to the end of Phase 6, Figure 2-2, must be protected appropriately. For a list of assets to be protected refer to Section 3.1.



## TOE Security Functional Requirements

- 112 The TOE security functional requirements define the functional requirements for the TOE using functional requirements components drawn from the Common Criteria part 2, and extended functional requirements defined in BSI-PP-002-2001.
- 113 The minimum strength of function level for the TOE security requirements is SOF-high.

### 5.1 TOE Functional Requirements

#### Standard Security Functional Requirements

- 114 The Standard TOE Security Functional Requirements as listed within the BSI-PP-002-2001 are shown in Figure 5-1

Figure 5-1 Standard Security Functional Requirements

#### Standard SFRs which

- Protect User Data
- Support the Other SFRs

#### Malfunctions

Limited Fault Tolerance (FRU\_FLT.2)

Failure with Preservation of Secure State (FPT\_FLS.1)

Domain Separation (FPT\_SEP.1)

#### Leakage

Basic Internal Transfer Protection (FDP\_ITT.1)

Basic Internal TSF data Transfer Protection (FPT\_ITT.1)

Subset Information Flow Control (FDP\_IFC.1)

#### Physical Manipulation and Probing

Resistance to Physical Attack (FPT\_PHP.3)

#### Standard SFRs which

- Support the TOE's Life Cycle
- Prevent Abuse of Functions

#### Abuse of Functionality

Limited Capabilities (FMT\_LIM.1)

Limited Availability (FMT\_LIM.2)

#### Identification

Audit Storage (FAU\_SAS.1)




115 The Security Functional Requirements related to specific Functionality are shown in Figure 5-2. The Security Functional Requirements are split into three:

- the SFRs as stated within the BSI-PP-002-2001 the SFRs as stated within this Security Target and taken from BSI-AUG-2002
- the SFR as stated within this Security Target and taken from the CC

Figure 5-2 Security Functional Requirements related to Specific Functionality


**SFRs related to Specific Functionality**

**- Cryptography**

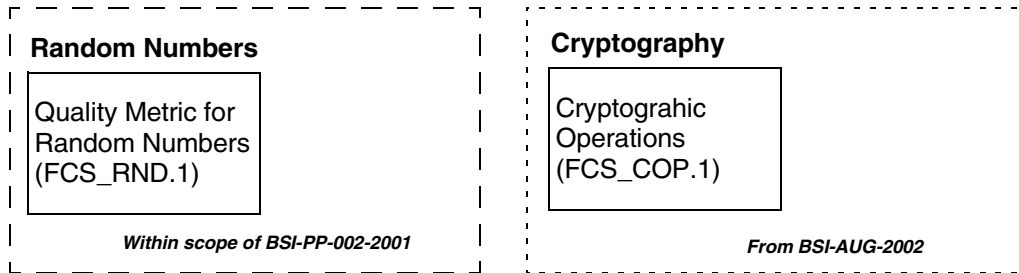


**SFRs related to Specific Functionality**

**- Configuration of Security System**

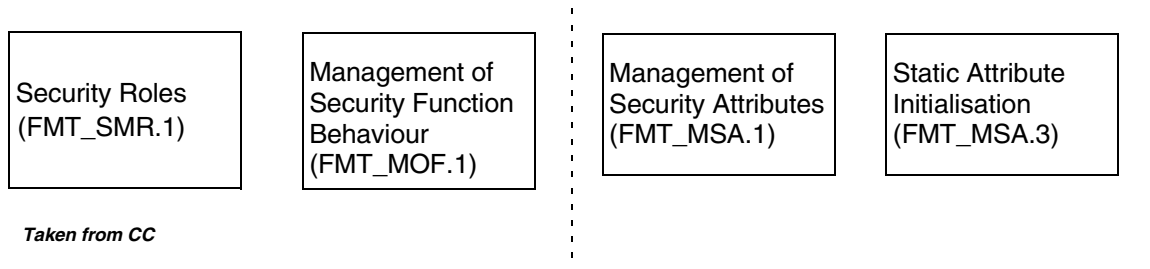

**SFRs related to Specific Functionality**

**- Memory Access**

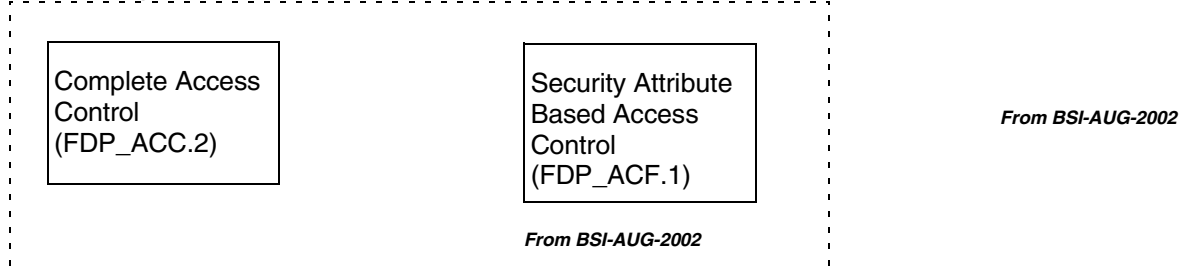

### 5.1.1 Functional Requirements Relating to Physical Malfunction

#### Limited Fault Tolerance (FRU\_FLT.2)

116 The TOE **shall** meet the requirement “Limited Fault Tolerance” as specified below:

FRU_FLT.2	Limited fault tolerance
Hierarchical to	FRU_FLT.1
FRU_FLT.2.1	The TSF shall ensure the operation of <b>all the TOE’s capabilities</b> when the following failure occur: <b>exposure to operating conditions which are not detected according to the requirement “Failure with preservation of secure state” (FPT_FLS.1).</b>
Dependencies	FPT_FLS.1 Failure with preservation of secure state
Refinement	The term “failure” above means “circumstances”. The TOE prevents failures for “Circumstances” defined above.

#### Failure with Preservation of Secure State (FPT\_FLS.1)

117 The TOE **shall** meet the requirement “Failure with Preservation of Secure State” as specified below:

FPT_FLS.1	Failure with preservation of secure state
Hierarchical to	No other components
FPT_FLS.1.1	The TSF shall preserve a secure state when the following types of failure occur: <b>exposure to operating conditions which may not be tolerated according to the requirement “Limited fault tolerance” (FRU_FLT.2) and where therefore a malfunction could occur.</b>
Dependencies	ADV_SPM.1 Informal TOE security policy model
Refinement	The term “failure” above means “circumstances”. The TOE prevents failures for “Circumstances” defined above.

#### TSF Domain Separation (FPT\_SEP.1)

118 The TOE **shall** meet the requirement “TSF domain separation” as specified below:

FPT_SEP.1	TSF domain separation
Hierarchical to	No other components
FPT_SEP.1.1	The TSF shall maintain a security domain for its own execution that protects it from interference and tampering by untrusted subjects.



FPT_SEP.1.2	the TSF shall enforce separation between the security domains of subjects in the TSC.
Dependencies	No dependencies
Refinement	Those parts of the TOE which support the security functional requirements "Limited fault tolerance (FRU_FLT.2)" and "Failure with preservation of secure state (FPT_FLS.1)" shall be protected from interference of the Smartcard Embedded Software.

### 5.1.2 Functional Requirements Relating to Leakage

---

#### Basic Internal Transfer Protection (FDP\_ITT.1)

119 The TOE **shall** meet the requirement “Basic internal transfer protection” as specified below:

FDP_ITT.1	Basic internal transfer protection
Hierarchical to	No other components
FDP_ITT.1.1	The TSF shall enforce the <b>Data Processing Policy</b> to prevent the <b>disclosure</b> of user data when it is transmitted between physically-separated parts of the TOE.
Dependencies	FDP_ACC.1 Subset access control, or FDP_IFC.1 Subset information flow control
Refinement	The different memories, the CPU and other functional units of the TOE (e.g. a cryptographic co-processor) are seen as physically-separated parts of the TOE.

---

#### Basic Internal TSF data transfer protection (FPT\_ITT.1)

120 The TOE **shall** meet the requirement “Basic internal TSF data transfer protection” as specified below:

FPT_ITT.1	Basic internal TSF data transfer protection
Hierarchical to	No other components



FPT_ITT.1.1	The TSF shall protect TSF data from <b>disclosure</b> when it is transmitted between separate parts of the TOE.
Dependencies	No dependencies
Refinement	The different memories, the CPU and other functional units of the TOE (e.g. a cryptographic co-processor) are seen as separated parts of the TOE.  This requirement is equivalent to FDP_ITT.1 above but refers to TSF data instead of User Data. Therefore, it should be understood as to refer to the same Data Processing Policy defined under FDP_IFC.1.

---

**Subset Information Flow Control (FDP\_IFC.1)**

121	The TOE <b>shall</b> meet the requirement “Subset information flow control” as specified below:
FDP_IFC.1	Subset information flow control
Hierarchical to	No other components
FDP_IFC.1.1	The TSF shall enforce the <b>Data Processing Policy on all confidential data when they are processed or transferred by the TOE or by the Smartcard Embedded Software.</b>
Dependencies	FDP_IFF.1 Simple security attributes
122	The following Security Functional Policy (SFP) Data Processing Policy is defined for the requirement “Subset information flow control”:
	<ul style="list-style-type: none"> <li>■ User Data and TSF data shall not be accessible from the TOE except when the Smartcard Embedded Software decides to communicate the User Data via an external interface. The protection shall be applied to confidential data only but without the distinction of attributes controlled by the Smartcard Embedded Software.</li> </ul>



### 5.1.3 Functional Requirements Relating to Physical Manipulation and Probing

#### Resistance to Physical Attack (FPT\_PHP.3)

123 The TOE **shall** meet the requirement “Resistance to physical attack” as specified below:

FPT_PHP.3	Resistance to physical attack
Hierarchical to	No other components
FPT_PHP.3.1	The TSF shall resist <b>physical manipulation and physical probing</b> to <b>the TSF</b> by responding automatically such that the TSP is not violated.
Dependencies	No dependencies
Refinement	The TOE will implement appropriate measures to continuously counter physical manipulation and physical probing. Due to the nature of these attacks (especially manipulation) the TOE can by no means detect attacks on all of its elements. Therefore, permanent protection against these attacks is required ensuring that the TSP could not be violated at any time. Hence, "automatic response" means here: <ul style="list-style-type: none"> <li>■ assuming that there might be an attack at any time</li> <li>■ and countermeasures are provided at any time.</li> </ul>

### 5.1.4 Functional Requirements Relating to Abuse of Functionality

#### Limited Capabilities (FMT\_LIM.1)

124 The TOE **shall** meet the requirement “Limited capabilities” as specified below:

FMT_LIM.1	Limited capabilities
Hierarchical to	No other components
FMT_LIM.1.1	The TSF shall be designed in a manner that limits their capabilities so that in conjunction with "Limited availability (FMT_LIM.2)" the following policy is enforced: <b>Deploying Test Features after TOE Delivery does not allow User Data to be disclosed or manipulated, TSF data to be disclosed or manipulated, software to be reconstructed and no substantial information about construction of TSF to be gathered which may enable other attacks.</b>
Dependencies	FMT_LIM.2 Limited availability





Limited Availability (FMT\_LIM.2)

125 The TOE **shall** meet the requirement “Limited availability” as specified below:

FMT_LIM.2	Limited availability
Hierarchical to	No other components
FMT_LIM.2.1	The TSF shall be designed in a manner that limits their availability so that in conjunction with "Limited capabilities" the following policy is enforced: <b>Deploying Test Features after TOE Delivery does not allow User Data to be disclosed or manipulated, TSF data to be disclosed or manipulated, software to be reconstructed and no substantial information about construction of TSF to be gathered which may enable other attacks.</b>
Dependencies	FMT_LIM.1 Limited capabilities

**5.1.5 Functional Requirements Relating to Identification**Audit Storage (FAU\_SAS.1)

126 The TOE **shall** meet the requirement “Audit storage” as specified below:

FAU_SAS.1	Audit storage
Hierarchical to	No other components
FAU_SAS.1.1	The TSF shall provide test personnel before TOE Delivery with the capability to store <b>the Initialisation Data and/or Pre-personalisation Data and/or supplements of the Smartcard Embedded Software</b> in the audit records.
Dependencies	No dependencies

**5.1.6 Functional Requirements Relating to Cryptography**Quality Metric for Random Numbers (FCS\_RND.1)

127 The TOE **shall** meet the requirement “Quality metric for random numbers” as specified below:

FCS_RND.1	Quality metric for random numbers
-----------	-----------------------------------



Hierarchical to	No other components
FCS_RND.1.1	The TSF shall provide a mechanism to generate random numbers that meet <b>AIS31 class P2 quality metric</b> .
Dependencies	No dependencies

---

**Cryptographic operation (FCS\_COP.1) for Toolbox 00.03.10.00 and 00.03.13.00**

128 The TOE **shall** meet the requirement “Cryptographic operation” on cryptographic operations as specified below:

FCS_COP.1	Cryptographic operation
Hierarchical to	No other components
FCS_COP.1.1	The TSF shall perform <b>hardware TDES encryption and decryption</b> in accordance with a specified cryptographic algorithm: <b>triple Data Encryption Standard (TDES)</b> and cryptographic key sizes: <b>112-bit cryptographic key sizes</b> that meet the following <b>E-D-E two-key triple-encryption implementation of the Data Encryption Standard, FIPS PUB 46-3, 25th October, 1999</b> .
Dependencies	(FDP_ITC.1 Import of user data without security attributes or FDP_ITC.2 Import of user data with security attributes or FCS_CKM.1 Cryptographic key generation)  FCS_CKM.4 Cryptographic key destruction  FMT_MSA.2 Secure security attributes



Note

**E-D-E** =The simplest variant of TDES operates as follows: DES(k3;DES(k2;DES(k1;M))), where M is the message block to be encrypted and k1, k2, and k3 are DES keys. This variant is commonly known as EEE because all three DES operations are encryptions. In order to simplify interoperability between DES and TDES the middle step is usually replaced with decryption (EDE mode): DES(k3;DES<sup>-1</sup>(k2;DES(k1;M))) and so a single DES encryption with key k can be represented as TDES-EDE with k1 = k2 = k3 = k. The choice of decryption for the middle step does not affect the security of the algorithm.

---

**Cryptographic operation (FCS\_COP.1) Toolbox 00.03.10.00 only**

129 The TOE **shall** meet the requirement “Cryptographic operation” on cryptographic operations as specified below:

FCS_COP.1	Cryptographic operation
Hierarchical to	No other components
<b>FCS_COP.1.1</b>	The TSF shall perform <b>software</b> :



- **data Hash** in accordance with a specified cryptographic algorithm: **SHA-1**, and cryptographic key size:**with no cryptographic key size** that meet the following **Secure Hash Standard, Federal Information Processing Standards Publication 180-2, 2002 August 1**
- **data Hash** in accordance with a specified cryptographic algorithm: **SHA-224**, and cryptographic key size:**with no cryptographic key size** that meet the following **Secure Hash Standard, Federal Information Processing Standards Publication 180-2, 2002 August 1**
- **data Hash** in accordance with a specified cryptographic algorithm: **SHA-256**, and cryptographic key size:**with no cryptographic key size** that meet the following **Secure Hash Standard, Federal Information Processing Standards Publication 180-2, 2002 August 1**
- **data encryption and decryption** in accordance with a specified cryptographic algorithm: **RSA without CRT data**, and cryptographic key size:**between 96 bits and 2624 bits** that meet the following, **PKCS#1 V2.0, 1st October, 1998.**
- **data encryption and decryption** in accordance with a specified cryptographic algorithm: **RSA with CRT data**, and cryptographic key size:**between 192 bits and 3520 bits** that meet the following **PKCS#1 V2.0, 1st October, 1998.**

## Dependencies

(FDP\_ITC.1 Import of user data without security attributes or  
 FDP\_ITC.2 Import of user data with security attributes or  
 FCS\_CKM.1 Cryptographic key generation)  
 FCS\_CKM.4 Cryptographic key destruction  
 FMT\_MSA.2 Secure security attributes



### 5.1.7 Functional Requirements Relating to Configuration of Security System

#### Security Roles (FMT\_SMR.1)

130 The TOE **shall** meet the requirement “Security roles” as specified below:

FMT_SMR.1	Security roles
Hierarchical to	No other components
FMT_SMR.1.1	The TSF shall maintain the roles: <ul style="list-style-type: none"> <li>■ <b>S.TME_ADMIN: Test mode entry (TME) administrator</b></li> <li>■ <b>S.P0_SUPER: P0-supervisor</b></li> <li>■ <b>S.P1_SUPER: P1-Supervisor</b></li> <li>■ <b>S.NON_SUPER: Non-supervisor</b></li> <li>■ <b>S.P5_SUPER: P5-supervisor</b></li> <li>■ <b>S.P6_SUPER: P6-supervisor</b></li> <li>■ <b>S.PME_ADMIN: Package mode entry (PME) administrator</b></li> </ul>
FMT_SMR.1.2	The TSF shall be able to associate users with roles
Dependencies	FIA_UID.1 Timing of Identification

#### Management of Security Function Behaviour (FMT\_MOF.1)

131 The TOE **shall** meet the requirement “Management of security function behaviour” as specified below:

FMT_MOF.1	Management of security function behaviour
-----------	-------------------------------------------



Hierarchical to FMT_MOF.1.1	No other components The TSF shall: <ul style="list-style-type: none"> <li>■ restrict the ability to <b>F1 (modify the behaviour of the function SF1 (Not disclosed in ST-Lite))</b>.</li> <li>■ restrict the ability to <b>F2 (enable the function SF7 (Event Audit)) (Not disclosed in ST-Lite)</b>.</li> <li>■ restrict the ability to <b>F3 (disable the function SF7 (Event Audit)) (Not disclosed in ST-Lite)</b>.</li> <li>■ restrict the ability to <b>F4 (modify the behaviour of the function SF8 (Event Action)) (Not disclosed in ST-Lite)</b>.</li> <li>■ restrict the ability to <b>F5 (modify the behaviour of the function SF9 (Unobeservability)) (Not disclosed in ST-Lite)</b>.</li> </ul>
Dependencies	FMT_SMR.1 Security Roles FMT_SMF.1 Specification of Management Functions



Labels Fx and Ax are tags to aid identification within the rationale.

#### **Management of Security Attributes (FMT\_MSA.1)**

132 The TOE **shall** meet the requirement “Management of security attributes” as specified below:

FMT_MSA.1	Management of security attributes
Hierarchical to FMT_MSA.1.1	No other components The TOE security functions shall enforce <b>the ACSF_Policy (Access Control Security Functions Policy)</b> to restrict the ability to <b>modify</b> the security attributes <b>A1-A30 to S.TME_ADMIN, S.P0_SUPER, S.P1_SUPER, S.P5_SUPER, S.P6_SUPER</b>
Dependencies	FDP_ACC.1 Subset access control or FDP_IFC.1 subset information flow control FMT_SMR.1 Security roles FMT_SMF.1 Specification of management functions



**Static Attribute Initialisation (FMT\_MSA.3)**

133 The TOE **shall** meet the requirement “Static attribute initialisation” as specified below:

FMT_MSA.3	Static attribute initialisation
Hierarchical to	No other components
FMT_MSA.3.1	The TOE security functions shall enforce the <b>ACSF_Policy</b> to provide <b>restrictive</b> default values for security attributes that are used to enforce the security functions policy.
FMT_MSA.3.2	The TSF shall allow the <b>S.TME_ADMIN</b> to specify alternate initial values to override the default values when an object or information is created.
Dependencies	FMT_MSA.1 Management of security attributes FMT_SMR.1 Security roles

**5.1.8 Functional Requirements Relating to Memory Access**

**Complete Access Control (FDP\_ACC.2)**

134 The TOE **shall** meet the requirement “Complete access control” as specified below:

FDP_ACC.2	Complete access control
Hierarchical to	FDP_ACC.1 Subset access control
FDP_ACC.2.1	The TOE security functions shall enforce the <b>Access Control SFP</b> on: <ul style="list-style-type: none"> <li>▪ <b>Subjects: S.TME_ADMIN, S.P0_SUPER, S.P1_SUPER, S.P5_SUPER, S.P6_SUPER, S.PME_ADMIN, S.NON_SUPER</b></li> <li>▪ <b>Objects: (O1) CPU ROM, (O2) EEPROM, (O3) Crypto ROM, (O4) CPU RAM, (O5) Crypto RAM, (O6) peripheral and IO registers</b></li> </ul> and all operations among subjects and objects covered by the SFP
FDP_ACC.2.2	The TOE security function shall ensure that all operations between any subject in the TOE scope of control and any object within the TOE scope of control are covered by an access control SFP.
Dependencies	FDP_AFC.1 Security attribute based access control



**Security attribute based access control (FDP\_ACF.1)**

135

The TOE **shall** meet the requirement “Security attribute based access control” as specified below:

FDP_ACF.1	Security attribute based access control
Hierarchical to	No other components
FDP_ACF.1.1	<p>The TOE security functions shall enforce the <b>ACSF_Policy</b> to objects based on the following:</p> <ul style="list-style-type: none"> <li>■ <b>Subjects: S.TME_ADMIN, S.P0_SUPER, S.P1_SUPER, S.P5_SUPER, S.P6_SUPER, S.PME_ADMIN, S.NON_SUPER</b></li> <li>■ <b>Objects: (O1) CPU ROM, (O2) EEPROM, (O3) Crypto ROM, (O4) CPU RAM, (O5) Crypto RAM, (O6) peripheral and IO registers</b></li> <li>■ <b>Operations: Read, Write, Execute</b></li> <li>■ <b>Conditions: the Firewall configuration</b></li> </ul> <p><b>For full list see note</b></p>
FDP_ACF.1.2	The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed <b>see (Not disclosed in ST-Lite)</b>
FDP_ACF.1.3	The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: <b>None</b>
FDP_ACF.1.4	The TSF shall explicitly deny access of subjects to objects based on the <b>following additional rules see (Not disclosed in ST-Lite)</b>
Dependencies	<p>FDP_ACC.1 Subset access control</p> <p>FMT_MSA.3 Static attribute initialisation</p>





- A1: Read P0 CPU ROM (O1) access right
- A2: Write P0 CPU ROM (O1) access right
- A3: Execute P0 CPU ROM (O1) access right
- A4: Read P1 EEPROM (O2) access right
- A5: Write P1 EEPROM (O2) access right
- A6: Execute P1 EEPROM (O2) access right
- A7: Read P2 EEPROM (O2) access right
- A8: Write P2 EEPROM (O2) access right
- A9: Execute P2 EEPROM (O2) access right
- A10: Read P3 EEPROM (O2) access right
- A11: Write P3 EEPROM (O2) access right
- A12: Execute P3 EEPROM (O2) access right
- A13: Read P5 Crypto ROM (O3) access right
- A14: Write P5 Crypto ROM (O3) access right
- A15: Execute P5 Crypto ROM (O3) access right
- A16: Read P6 Crypto ROM (O3) access right
- A17: Write P6 Crypto ROM (O3) access right
- A18: Execute P6 Crypto ROM (O3) access right
- A19: Read CPU EEPROM (O2) access right
- A20: Write CPU EEPROM (O2) access right
- A21: Execute CPU EEPROM (O2) access right
- A22: Read CPU RAM (O4) access right
- A23: Write CPU RAM (O4) access right
- A24: Execute CPU RAM (O4) access right
- A25: Read Crypto RAM (O5) access right
- A26: Write Crypto RAM (O5) access right
- A27: Execute Crypto RAM (O5) access right
- A28: Read peripheral and IO registers (O6) access right
- A29: Write peripheral and IO registers (O6) access right
- A30: Execute peripheral and IO registers (O6) access right





### 5.1.9 Security Requirements for the IT-Environment

136 The security functional requirement "Cryptographic operation (FCS\_COP.1)" met by the TOE has the following dependencies:

- [FDP\_ITC.1 import of user data without security attributes or FCS\_CKM.1 Cryptographic key generation]
- FCS\_CKM.4 Cryptographic key destruction
- FMT\_MSA.2 Secure security attributes

137 These requirement address the appropriate management of cryptographic keys used by the specified cryptographic function. All requirements concerning key management shall be fulfilled by the environment since the Smartcard Embedded Software is designed for a specific application context and uses the cryptographic functions provided by the TOE.

138 The environment shall meet the requirements:

- FDP\_ITC.1 or FCS\_CKM.1
- FCS\_CKM.4
- FMT\_MSA.2

### 5.1.10 Security Requirements for the NON-IT-Environment

139 In the following, security requirements for the Non-IT-Environment are defined. For the development of the Smartcard Embedded Software (in Phase 1) the requirement "Design and implementation of the Smartcard Embedded Software (RE.Phase-1)" is valid.

RE.Phase-1 Design and Implementation of the Smartcard Embedded Software

The developers shall design and implement the Smartcard Embedded Software in such a way that it meets the requirements from the following documents (i) hardware data sheet for the TOE, (ii) TOE application notes, and (iii) findings of the TOE evaluation reports relevant for the Smartcard Embedded Software.

The developers shall implement the Smartcard Embedded Software in a way that it protects security relevant User Data (especially cryptographic keys) as required by the security needs of the specific application context.



140 The Smartcard Embedded Software shall meet the requirement “Cipher Schemas (RE.Cipher)” as specified below.

RE.Cipher Cipher Schemas

The developers of Smartcard Embedded Software must not implement routines in a way which may compromise keys when the routines are executed as part of the Smartcard Embedded Software. Performing functions which access cryptographic keys could allow an attacker to misuse these functions to gather information about the key which is used in the computation of the function.

Keys must be kept confidential as soon as they are generated. The keys must be unique with a very high probability, as well as cryptographically strong. For example, it must be ensured that it is not possible to derive the private key from a public key if asymmetric algorithms are used. This implies that an appropriate key management has to be realized in the environment.

141 The responsible parties for Phases 4-6 are required to support the security of the TOE by appropriate measures.

RE.Process Protection during Packaging, Finishing and Personalisation  
-Card

The card manufacturer (after TOE delivery up to the end of Phase 6) shall use adequate security measures to maintain confidentiality and integrity of the TOE and of its manufacturing and test data (to prevent any possible copy, modification, retention, theft or unauthorised use.)



---

## 5.2 TOE Security Assurance Requirements

142 The assurance requirement is EAL5 augmented of additional assurance components listed in Table 5-1.

143 Some of the augmentation components are hierarchical ones to the components specified in EAL5.

144 All the components are drawn from Common Criteria Part 3.

Table 5-1 EAL5 Package and Augmentation

Assurance Class	EAL5 Package	AT90SC13612RCU EAL5+ Package	Augmented From EAL5
ACM_AUT	1	1	No
ACM_CAP	4	4	No
ACM_SCP	3	3	No
ADO_DEL	2	2	No
ADO_IGS	1	1	No
ADV_FSP	3	3	No
ADV_HLD	3	3	No
ADV_IMP	2	2	No
ADV_INT	1	1	No
ADV_LLD	1	1	No
ADV_RCR	2	2	No
ADV_SPM	3	3	No
AGD_ADM	1	1	No
AGD_USR	1	1	No
ALC_DVS	1	2	Yes
ALC_FLR	N/A	N/A	No
ALC_LCD	2	2	No
ALC_TAT	2	2	No
ATE_COV	2	2	No
ATE_DPT	2	2	No
ATE_FUN	1	1	No
ATE_IND	2	2	No
AVA_CCA	1	1	No
AVA_MSU	2	3	Yes
AVA_SOF	1	1	No
AVA_VLA	3	4	Yes



145            The refinements to the assurance requirements as stated within the Protection Profile BSI-PP002-2001 have been taken into account.



---

## TOE Summary Specification

146 This section defines the TOE security functions that implement the security functional requirements defined in Section 5.1, and the TOE assurance measures that implement the security assurance requirements defined in Section 5.2.

---

### 6.1 TOE Security Functions

#### 6.1.1 Test Mode Entry (SF1)

147 SF1 shall ensure that only authorized users will be permitted to enter Test Mode. This is provided by M1.1 Test Mode Entry conditions that are required to enable the TOE to enter Test Mode.

148 All test entry requirements occur while the TOE is held in reset and failure in any one will prevent Test Mode Entry. It is required that the TOE satisfies the test entry conditions during any internal reset condition.

149 It is not possible to move from User Mode to Test Mode. Any attempt to do this, for example, by forcing internal nodes will be detected and the security functions will disable the ability to enter Test Mode.

150 The Strength of Function claimed for the Test Mode Entry security function is high.



### 6.1.2 Protected Test Memory Access (SF2)

- 151 SF2 shall ensure that, although authenticated users can have access to memories using commands in test mode, they cannot access directly their contents.
- 152 Authorized Test Mode users also have access to other address regions which are not accessible in user mode.
- 153 The Strength of Function claimed for the Protected Test Memory Access security function is high.

### 6.1.3 Test Mode Disable (SF3)

- 154 SF3 shall make provision for:
- M3.1 Wafer sawing which, once done, shall ensure that none of the test features are available, not even to authenticated users in test mode. Although Package Mode Entry (PME) is available.

### 6.1.4 RNG (SF4)

- 155 M4.1 the TSF shall provide a hardware Random Number Generator (RNG) to support security operations performed by cryptographic applications. This RNG noise source shall not be predictable, have sufficient entropy, and not leaking information related to the value of the generated random numbers as this leakage could be used to retrieve cryptographic keys for instance. The RNG noise source as a sufficient entropy to comply with the AIS31 standard. The RNG has a Digitized Analogue Source (DAS) bit that enables the smartcard embedded software to check that the RNG noise source maintains a sufficient entropy throughout the life of the TOE, this confirms to the AIS31 class P2 standard.
- 156 The Atmel Toolbox allows the testing of the hardware RNG, to allow the testing the Atmel Toolbox provides a routine and several subservices.
- Main Toolbox test routine
  - Test a buffer against total failure of the hardware RNG
  - Perform a test of above buffer
- 157 Subservice total failure can be considered as a TOT-test. Test of buffer can be considered as a Online-test. Full details of how to use the functions listed to provide AIS31 complaint random data is given in guidance document [APP\_RNG\_ENT].
- 158 The Strength of Function claimed for the RNG security function is high.

### 6.1.5 Data Error Detection (SF5)

- 159 SF5 shall provide means for performing data error detection.



160 Means of performing checksum error detection and parity error detection is provided the following mechanisms:

- M5.1 16/32-bit Checksum Accelerator
- M5.2 CRC-16/32 hardware peripheral
- M5.3 Cstack Checker.
- M5.4 parity checking CPU core registers
- M5.5 parity checking CPU RAM
- M5.6 parity checking Crypto RAM
- M5.8 parity checking ROM
- M5.9 Enhanced Protection Object (EPO)

#### 6.1.6 FireWall (SF6)

161 SF6 shall enforce access control based on the FireWall rules as defined in the ACSF\_Policy (**Not disclosed in ST-Lite**).

##### M6.1 Memory protection

162 The FireWall defines user modes to execute embedded software, if an illegal area is accessed by the user mode a security interrupt is invoked.

##### M6.2 Illegal address

163 If an illegal address is accessed, a security interrupt is invoked.

##### M6.3 Illegal opcode

164 If an attempt is made to execute any opcode that is not implemented in the instruction set, a security non maskable interrupt is invoked.

#### 6.1.7 Event Audit (SF7)

165 The TOE shall provide an Event Audit security function (SF7) to enforce the following rules for monitoring audited events.

166 Accumulation or combination of the following auditable events would indicate a potential security violation.

- M7.1 The external voltage supply goes outside acceptable bounds
- M7.2 The external clock signal goes outside acceptable bounds
- M7.3 The ambient temperature goes outside acceptable bounds
- M7.4 Application program abnormal runaway
- M7.5 Attempts to physically probe the device
- M7.6 Attempts to gain illegal access to reserved RAM memory locations



- M7.7 Attempts to gain illegal access to reserved EEPROM (O2) memory locations: audited by SVR0.EEVI (IO register bit).
- M7.8 Attempts to gain illegal access to reserved peripheral, IO and AdvX register locations
- M7.9 Attempts to execute illegal instruction “LPM” to read the program memory from the S.NON\_SUPER program location
- M7.10 Attempts to move the RAM stack to an illegal RAM memory location defined by SPHLC and SPLLC registers
- M7.11 Attempts to move the RAM Cstack to an illegal RAM memory location defined by CSTACKH CSTACKL
- M7.12 Attempts to execute a CPU opcode that is not implemented
- M7.13 Attempts to illegally write access the device’s EEPROM (O2)
- M7.14 Attempts to gain illegal access to supervisor modes
- M7.15 Exposure to UV light goes outside acceptable bounds
- M7.16 Attempts to scan the TOE with a focused light beam
- M7.17 Attempts to modify the AVRcore register file
- M7.18 Attempts to modify the CPU RAM contents
- M7.19 Attempts to modify the Crypto RAM contents
- M7.21 Attempts to modify the ROM memories
- M7.22 Attempts to modify the NVM memories
- M7.24 A violation encountered by the Code Signature Module
- M7.25 A register mirroring violation

167 The Strength of Function claimed for the Event audit security function is high.

#### 6.1.8 Event Action (SF8)

168 SF8 shall provide an Event Action security function to register occurrences of audited events and take appropriate action. Detection of such occurrences will cause an information flag to be set, and may cause one of the following to occur if warranted by the violation: **(Not disclosed in ST-Lite)**

169 Event Action depends on the type of Event (see [TD] for more information).

#### 6.1.9 Unobservability (SF9)

170 SF9 shall ensure that users/third parties will have difficulty observing the following operations on the TOE by the described means.

- Monitoring power consumption
- Carrying out timing analysis on cryptographic functions
- Using optical, mechanical or electrical means





171 The Strength of Function claimed for the Unobservability security function is high.

#### 6.1.10 Cryptography (SF10)

172 The TSF shall provide a cryptographic algorithm to be able to transmit and receive objects in a manner protected from data retrieval or modification.



Note

The **software** mechanisms **M10.2, M10.3, M10.4, M10.5** are **only** available when using Toolbox version **00.03.10.00**. Therefore the version of the TOE with Toolbox **00.03.13.00** has no additional cryptographic functions, the only cryptographic function available to the user is TDES as this is a **hardware** function.

173 M10.1 the TSF shall provide **hardware** TDES data encryption/decryption capability.

174 M10.2 the TSF shall provide **software** secure Hash, SHA-1, 224, 256, data signing capability

175 M10.3 the TSF shall provide **software** RSA without CRT (i.e. modular exponentation) data encryption decryption function.

- Secure encryption
- Fast encryption (**see note\***)

176 M10.4 the TSF shall provide **software** RSA with CRT data encryption decryption function.

- Secure encryption
- Fast encryption (**see note\***)

177 M10.5 the TSF shall provide **software** RSA cryptographic key generation capability using Miller Rabin algorithm with confidence criteria (t parameter) between 0 and 255

- Secure generation
- Fast generation (**see note\***)

178 These may be used by the smartcard embedded software to support data encryption and decryption for maintaining data integrity, and protect against sensitive data unauthorized disclosure.



Note

\* The **Fast** functions of M10.3, M10.4, M10.5 do not offer any DPA/SPA protection and **must** not be used for secure data.

179 The Strength of Function claimed for the cryptography security function is high.



180 An assessment of the strength of the following algorithms does not form part of the evaluation:

- TDES algorithm
- RSA without CRT algorithm
- RSA with CRT algorithm

181 The following functions use probabilistic or permutational effects and have a strength of function claim of high.

- SHA algorithm
- Miller Rabin algorithm

#### **6.1.11 Package Mode Entry (SF11)**

182 SF11 shall ensure only authorized users will be permitted to enter Package Mode. This is provided by the M1.1 Test Mode Entry conditions, and also the M11.1 Package Mode Entry conditions. Both M1.1 and M11.1 conditions must be met to enter Package Mode.

183 To enter Package mode the conditions must be met in SF1 (M1.1) first, then whilst the TOE is still held in reset the PME conditions (M11.1) must be met. Failure to meet these conditions will prevent entry into Package Mode.

184 The Strength of Function for the Package Mode Entry function is high.

#### **6.1.12 Test Memory Access in Package Mode (SF12)**

185 SF12 shall ensure that, although authenticated users can have access to memories using commands in package mode, they cannot access directly their contents.

186 When package mode is entered a full EEPROM (O2) erase is performed. Access to the device memories are limited by test algorithms.

- M12.1 the EEPROM (O2) tests are read/write functions controlled via a test interface.
- M12.2 CPU ROM (O1) data no access.
- M12.3 Crypto ROM (O3) data no access.
- M12.4 CPU RAM no write access.
- M12.5 Crypto RAM no write access

187 The Strength of Function claimed for the Protected Test Memory Access in Package Mode is high.



**6.1.13 Security Functions Based on Permutations/combinations**

- 188 Security function SF1 and SF11 are based on mechanisms using permutation and/or combination properties.
- 189 Therefore, the resistance of SF1 and SF11 should be evaluated against attacks using brute force techniques.
- 190 Parts of SF10 use problematic or permutational effects and is included in the Strength of function analysis [ESOF].
- 191 Further details on these mechanisms and on the Strength of Function Analysis performed by ATMEL can be found in [ESOF].



## 6.2 TOE Assurance Measures

192

Table 6-1 specifies how they satisfy the TOE security assurance requirements.

Table 6-1 Relationship Between Assurance Requirements and Measures

Assurance Requirement	Security Target	Configuration Management	Delivery and Operation	Development Activity	Guidance	Life Cycle Support	Test Activity	Vulnerability assessment	Smartcard Devices	Development Site	Test Site	Manufacturing Site	Sub-contractor Site
	SA1	SA2	SA3	SA4	SA5	SA6	SA7	SA8	SA9	SA10	SA11	SA12	SA13
ASE_xxx	x												
ACM_AUT.1		x								x	x	x	x
ACM_CAP.4		x								x	x	x	x
ACM_SCP.3		x								x	x	x	x
ADO_DEL.2			x							x	x	x	x
ADO_IGS.1			x							x	x	x	x
ADV_FSP.3				x									
ADV_HLD.3				x									
ADV_IMP.2				x									
ADV_INT.1	x												
ADV_LLD.1				x									
ADV_RCR.2				x									
ADV_SPM.3				x									
AGD_ADM.1					x								
AGD_USR.1					x								
ALC_DVS.2						x				x	x	x	x
ALC_LCD.2						x				x	x	x	x
ALC_TAT.2						x				x	x	x	x
ATE_COV.2							x		x		x		
ATE_DPT.2							x		x		x		
ATE_FUN.1							x		x		x		
ATE_IND.2							x		x		x		
AVA_CCA.1								x	x				
AVA_MSU.3								x	x				
AVA_SOF.1								x	x				
AVA_VLA.4								x	x				

### Security Target (SA1)

193

SA1 shall provide the “TOE Security Target” document plus its references.



---

**Configuration Management (SA2)**

194 SA2 shall provide the “CC Configuration Management (ACM)” interface document plus its references.

---

**Delivery and Operation (SA3)**

195 SA3 shall provide the “CC Delivery and Operation (ADO)” interface document plus its references.

---

**Development Activity (SA4)**

196 SA4 shall provide the “CC Development Activity (ADV)” interface document plus its references.

---

**Guidance (SA5)**

197 SA5 shall provide the “CC Guidance (AGD)” interface document plus its references.

---

**Life Cycle Support (SA6)**

198 SA6 shall provide the “CC Life Cycle Support (ALC)” interface document plus its references.

---

**Test Activity (SA7)**

199 SA7 shall provide the “CC Test Activity (ATE)” interface document plus its references, and undertaking of testing described therein.

---

**Vulnerability Assessment (SA8)**

200 SA8 shall provide the “CC Vulnerability Assessment (AVA)” interface document plus its references, and undertaking of vulnerability assessment described therein.

---

**Smart Card Devices (SA9)**

201 SA9 shall provide functional AT90SC13612RCU smart card devices.

---

**Development Site (SA10)**

202 SA10 shall provide access to the development site.

---

**Test Site (SA11)**

203 SA11 shall provide access to the test site.

---

**Manufacturing Site (SA12)**

204 SA12 shall provide access to the manufacturing site.



Sub-contractor Sites (SA13)

205

SA13 shall provide access to the sub-contractor sites.



## PP Claims

---

### 7.1 PP Reference

206 This Security Target is conformant to the Protection Profile “Smartcard IC Platform Protection Profile” V1.0 July 2001, and has been registered under the German Certification Scheme (BSI) under the reference BSI-PP-002-2001.

---

### 7.2 PP Refinements

207 For clarification of this Security Target, modes, assets, subjects, threats, assumptions and organizational security policy are defined with labels of the form M.xx\_xx, D.xx\_xx, S.xx\_xx, T.xx\_xx, A.xx\_xx, and P.xx\_xx respectively.

---

### 7.3 PP Additions

208 The PP additions fall into the following categories, the additions:

- from the “Smartcard Integrated Circuit Augmentations” registered under the German Certification Scheme (BSI) under the reference BSI-AUG-2002
- taken directly from Common Criteria V2.3
- assumption and security objective for environment, defined in Section 3.2 of this Security Target

#### 7.3.1 Additions from BSI-AUG-2002

209 Additions include Assumptions, Threats, Organisational security Policies, Security Objectives and Security Functional Requirements.

##### 7.3.1.1 Assumptions

210 None



### 7.3.1.2 Threats

211 This security target specifies the additional threat, T.Mem-Access this relates to the threat that the Smartcard Embedded Software may cause security violations by accessing restricted data.

### 7.3.1.3 Organizational Security Policies

212 This security target specifies the additional organizational security policies, P.Add-Functions this policy relates to the cryptographic functions provided by the TOE.

### 7.3.1.4 Security Objectives

213 This security target specifies the additional security objective, O.Add-Functions this objective relates to the cryptographic functions provided by the TOE.

214 This security target specifies the additional security objective, O.Mem-Access this objective relates to area based memory access control provided by the TOE.

### 7.3.1.5 Security Functional Requirements

215 This security target specifies the additional security functional requirements:

- FCS\_COP.1 relating to the cryptographic functions provided by the TOE
- FMT\_MSA.1 relating to the configuration of security functions
- FMT\_MSA.3 relating to the configuration of security functions
- FDP\_ACC.2 relating to the memory access controls provided by the TOE
- FDP\_ACF.1 relating to the memory access controls provided by the TOE

## 7.3.2 Additions from the Common Criteria

### 7.3.2.1 Security Functional Requirements

216 This security target specifies the additional security functional requirements:

- FMT\_SMR.1 relating to the configuration of security functions
- FMT\_MOF.1 relating to the configuration of security functions





---

## A.1 Terms

<b>BIST</b>	Built In Self Test. Hardware implementation of an algorithm which tests for stuck at, transition, coupling and address faults in a memory
<b>Control Bytes</b>	Reserved bytes of EEPROM which can be programmed with traceability information.
<b>CRC-32</b>	Algorithm used to compute powerful checksum on memory blocks
<b>HASH</b>	Transformation of a string of characters into a usually shorter fixed length value or key that represents the original string.
<b>IC Dedicated Software</b>	<p>IC Proprietary software which is required for testing purposes and to implement special functions. For AT90SC13612RCU this includes the embedded test software and additional test programmes which are run from outside of the IC.</p> <p>The Crypto libraries also form part of the IC dedicated software.</p>
<b>IC Designer</b>	Institution (or its agent) responsible for the IC Development. Atmel is the institution in respect of the TOE.
<b>IC Manufacturer</b>	Institution (or its agent) responsible for the IC manufacturing, testing and pre-personalization. Atmel is the institution in respect of the TOE.
<b>IC Packaging Manufacturer</b>	Institution (or its agent) responsible for the IC packaging and testing.
<b>IC Pre-personalization Data</b>	Required information to enable the smartcard IC to be configured by means of ROM options and to enable programming of the EEPROM with customer specified data.



<b>Integrated Circuit (IC)</b>	Electronic component(s) designed to perform processing and/or memory functions.
<b>MARCH C</b>	Algorithm which tests for stuck at, transition, coupling and address faults in a memory.
<b>MARCH LR</b>	Algorithm which tests for stuck at, transition, coupling and address faults in a memory.
<b>MARCH Y</b>	Algorithm which tests for stuck at, transition, coupling and address faults in a memory.
<b>Personalizer</b>	Institution (or its agent) responsible for the smartcard personalization and final testing.
<b>Smartcard</b>	A credit sized plastic card which has a non volatile memory and a processing unit embedded within it.
<b>Smartcard Embedded Software</b>	Software embedded in the smartcard application (smartcard application software). This software is provided by smartcard embedded software developer (customer). Embedded software may be in any part of User ROM or EEPROM.
<b>Smartcard Embedded Software Developer</b>	Institution (or its agent) responsible for the smartcard embedded software development and the specification of pre-personalization requirements.
<b>Smartcard Issuer</b>	Institution (or its agent) responsible for the smartcard product delivery to the smartcard end-user.
<b>Smartcard Product Manufacturer</b>	Institution (or its agent) responsible for the smartcard product finishing process and testing.
<b>UNIX</b>	Interactive Time Sharing Operating System.
<b>Workstream</b>	Manufacturing Unix based batch Tracking System.



---

## A.2 Abbreviations

<b>ACSF</b>	Access Control Security Functions
<b>AdvX</b>	32-bit Crypto Accelerator developed and produced by Atmel
<b>AVR</b>	8-bit RISC processor developed and produced by Atmel
<b>BIST</b>	Built-in Self Test
<b>CC</b>	Common Criteria
<b>CPU</b>	Central Processing Unit
<b>CRC</b>	Cyclic Redundancy Check
<b>DES</b>	Data Encryption Standard
<b>DPA</b>	Differential Power Analysis
<b>EEPROM</b>	Electrically Erasable Programmable ROM
<b>EKB</b>	East Kilbride
<b>FIB</b>	Focussed Ion Beam
<b>HC MOS</b>	High Speed Complementary Metal Oxide Semiconductor
<b>I/O</b>	Input/Output
<b>IC</b>	Integrated Circuit
<b>IFCSF</b>	Information Flow Control Security Functions
<b>ISO</b>	International Standards Organization
<b>LFSR</b>	Linear Feedback Shift Register
<b>MAC</b>	Master Authentication Key
<b>MCU</b>	Microcontroller
<b>MPU</b>	Memory Protection Unit (Firewall)
<b>NVM</b>	Non Volatile Memory
<b>OTP</b>	One Time Programmable
<b>P0</b>	ROM Program Supervisor
<b>P1</b>	EEPROM Program Supervisor
<b>P5</b>	Crypto ROM Program Supervisor
<b>P6</b>	Crypto ROM Program Supervisor
<b>PME</b>	Package Mode Entry
<b>PMT</b>	Package Mode Test
<b>PP</b>	Protection Profile
<b>RAM</b>	Random-Access Memory



<b>RFO</b>	Rousset France Operations
<b>RISC</b>	Reduced Instruction Set Core
<b>RNG</b>	Random Number Generator
<b>ROM</b>	Read-Only Memory
<b>SPA</b>	Simple Power Analysis
<b>TD</b>	Technical Data
<b>TME</b>	Test Mode Entry
<b>TMR</b>	Test Mode Run
<b>TOE</b>	Target of Evaluation
<b>USB</b>	Universal Serial Bus
<b>VFO</b>	Variable Frequency Oscillator



---

## AT90SC13612RCU Life Cycle Addresses

217

The table below details the relevant addresses for the AT90SC13612RCU Project

Centre	Address
<b>Design Centre</b>	Atmel Secure Products Division Scottish Technology Park East Kilbride Scotland United Kingdom G75 0QR
<b>Maskshop</b>	Toppan Photomasks Europe 13106 Rousset Cedex, France 22529 Hamburg, Germany 01109 Dresden, Germany 91105 Corbeil Essonnes Cedex, France
<b>Wafer Fab</b>	Atmel Rousset Zone Industrielle 13106 Rousset Cedex France
<b>Test Centre</b>	Atmel Secure Products Division Scottish Technology Park East Kilbride Scotland United Kingdom G75 0QR







## Atmel Corporation

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## Regional Headquarters

### Europe

Atmel Sarl  
Route des Arsenalux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### Asia

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### Japan

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Atmel Operations

### Memory

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### Microcontrollers

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### La Chantnerie

BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ASIC/ASSP/Smart Cards

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### RF/Automotive

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

## Literature Requests

[www.atmel.com/literature](http://www.atmel.com/literature)

**Disclaimer:** The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© Atmel Corporation 2009. All rights reserved. Atmel®, logo and combinations thereof, Everywhere You Are® and others, are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.



Printed on recycled paper.