



**HP LaserJet Managed MFP E72525 / E72530 / E72535,
HP Color LaserJet Managed MFP E77822 / E77825 / E77830,
HP LaserJet Managed E82540 / E82550 / E82560,
HP Color LaserJet Managed MFP E87640 / E87650 / E87660,
HP LaserJet Enterprise MFP M631 / M632 / M633,
HP LaserJet Managed MFP E62555 / E62565 / E62575,
HP Color LaserJet Enterprise MFP M681 / M682,
HP Color LaserJet Managed MFP E67550 / E67560**

Security Target

Version: 2.62
Status: Final
Last Update: 2019-08-16

Trademarks

The following terms are trademarks of Hewlett-Packard Development Company, L.P. in the United States, other countries, or both.

- HP®
- LaserJet®

The following terms are trademarks of The Institute of Electrical and Electronics Engineers, Incorporated in the United States, other countries, or both:

- 2600.1™
- IEEE®

The following term is a trademark of Massachusetts Institute of Technology (MIT) in the United States, other countries, or both:

- Kerberos™

The following terms are trademarks of Microsoft Corporation in the United States, other countries, or both:

- Microsoft®
- SharePoint®
- Windows®

The following term is a trademark of INSIDE Secure in the United States, other countries, or both:

- INSIDE Secure®
- QuickSec®

Other company, product, and service names may be trademarks or service marks of others.

Legal Notices

This document is provided AS IS with no express or implied warranties. Use the information in this document at your own risk.

This document may be reproduced or distributed in any form without prior permission provided the copyright notice is retained on all copies. Modified versions of this document may be freely distributed provided that they are clearly identified as such, and this copyright is included intact.

Revision History

Revision	Date	Author(s)	Changes to Previous Revision
2.62	2019-08-16	Gerardo Colunga	Final version.

Table of Contents

1	Introduction	9
1.1	Security Target Identification	9
1.2	TOE Identification	9
1.3	TOE Type	9
1.4	TOE Overview	10
1.4.1	Required and optional non-TOE hardware, software, and firmware	10
1.4.2	Intended method of use	11
1.5	TOE Description	11
1.5.1	TOE models and firmware versions	11
1.5.2	TOE architecture	15
1.5.3	TOE security functionality (TSF) summary	19
1.5.3.1	Auditing	19
1.5.3.2	Cryptography	20
1.5.3.3	Identification and authentication	20
1.5.3.4	Data protection and access control	22
1.5.3.5	Protection of the TSF	24
1.5.3.6	TOE access protection	24
1.5.3.7	Trusted channel communication and certificate management	24
1.5.3.8	User and access management	25
1.5.4	TOE boundaries	25
1.5.4.1	Physical	25
1.5.4.2	Logical	26
1.5.4.3	Evaluated configuration	26
1.5.5	Security policy model	27
1.5.5.1	Subjects/Users	27
1.5.5.2	Objects	28
1.5.5.3	SFR package functions	31
1.5.5.4	SFR package attributes	31
2	CC Conformance Claim	33
2.1	Protection Profile tailoring and additions	33
2.1.1	IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A" ([PP2600.1])	33
2.1.2	SFR Package for Hardcopy Device Copy Functions ([PP2600.1-CPY])	37
2.1.3	SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions ([PP2600.1-DSR])	38
2.1.4	SFR Package for Hardcopy Device Fax Functions ([PP2600.1-FAX])	38
2.1.5	SFR Package for Hardcopy Device Print Functions ([PP2600.1-PRT])	38
2.1.6	SFR Package for Hardcopy Device Scan Functions ([PP2600.1-SCN])	39
2.1.7	SFR Package for Hardcopy Device Shared-medium Interface Functions ([PP2600.1-SMI])	39
3	Security Problem Definition	40
3.1	Introduction	40
3.2	Threat Environment	40
3.2.1	Threats countered by the TOE	40
3.3	Assumptions	41
3.3.1	Environment of use of the TOE	41
3.3.1.1	Physical	41
3.3.1.2	Personnel	41
3.3.1.3	Connectivity	41
3.4	Organizational Security Policies	41
3.4.1	Included in the PP2600.1 protection profile	41
3.4.2	In addition to the PP2600.1 protection profile	42
4	Security Objectives	43
4.1	Objectives for the TOE	43
4.2	Objectives for the Operational Environment	43
4.3	Security Objectives Rationale	44
4.3.1	Coverage	44

4.3.2	Sufficiency	46
5	Extended Components Definition	53
5.1	Class FPT: Protection of the TSF	53
5.1.1	Restricted forwarding of data to external interfaces (FDI)	53
5.1.1.1	FPT_FDI_EXP.1 - Restricted forwarding of data to external interfaces	53
5.2	Class FCS: Cryptographic support	53
5.2.1	Cryptographic Operation (Random Bit Generation) (FCS_RBG)	53
5.2.1.1	FCS_RBG_EXT.1 – Random Bit Generation	54
6	Security Requirements	55
6.1	TOE Security Functional Requirements	55
6.1.1	Security audit (FAU)	57
6.1.1.1	Audit data generation (FAU_GEN.1)	57
6.1.1.2	User identity association (FAU_GEN.2)	58
6.1.2	Cryptographic support (FCS)	59
6.1.2.1	Cryptographic key generation (FCS_CKM.1-ipsec)	59
6.1.2.2	Cryptographic key generation (FCS_CKM.1-job)	59
6.1.2.3	Cryptographic key establishment (FCS_CKM.2)	59
6.1.2.4	Cryptographic operation (FCS_COP.1-ipsec)	60
6.1.2.5	Cryptographic operation (FCS_COP.1-job)	61
6.1.2.6	Random Bit Generation (FCS_RBG_EXT.1)	61
6.1.3	User data protection (FDP)	61
6.1.3.1	Common access control SFP (FDP_ACC.1-cac)	61
6.1.3.2	TOE function access control SFP (FDP_ACC.1-tfac)	63
6.1.3.3	Common access control functions (FDP_ACF.1-cac)	64
6.1.3.4	TOE function access control functions (FDP_ACF.1-tfac)	64
6.1.3.5	Subset residual information protection (FDP_RIP.1)	65
6.1.4	Identification and authentication (FIA)	65
6.1.4.1	Local Device sign in authentication failure handling (FIA_AFL.1)	65
6.1.4.2	Local user attribute definition (FIA_ATD.1)	65
6.1.4.3	Verification of secrets (FIA_SOS.1)	66
6.1.4.4	Timing of Control Panel authentication (FIA_UAU.1)	66
6.1.4.5	IPsec authentication before any action (FIA_UAU.2)	66
6.1.4.6	Control Panel protected authentication feedback (FIA_UAU.7)	66
6.1.4.7	Timing of Control Panel identification (FIA_UID.1)	67
6.1.4.8	IPsec identification before any action (FIA_UID.2)	67
6.1.4.9	User-subject binding (FIA_USB.1)	67
6.1.5	Security management (FMT)	68
6.1.5.1	Management of security functions (FMT_MOF.1)	68
6.1.5.2	Management of security attributes (FMT_MSA.1)	69
6.1.5.3	Management of TSF data (FMT_MTD.1)	71
6.1.5.4	Specification of management functions (FMT_SMF.1)	72
6.1.5.5	Security roles (FMT_SMR.1)	72
6.1.6	Protection of the TSF (FPT)	73
6.1.6.1	Restricted forwarding of data to external interfaces (FPT_FDI_EXP.1)	73
6.1.6.2	Reliable time stamps (FPT_STM.1)	73
6.1.6.3	TSF testing (FPT_TST.1)	73
6.1.7	TOE access (FTA)	73
6.1.7.1	TSF-initiated termination of Control Panel sign-in session (FTA_SSL.3)	73
6.1.8	Trusted path/channels (FTP)	74
6.1.8.1	Inter-TSF trusted channel (FTP_ITC.1)	74
6.2	Security Functional Requirements Rationale	74
6.2.1	Coverage	74
6.2.2	Sufficiency	77
6.2.3	Security requirements dependency analysis	83
6.3	Security Assurance Requirements	86
6.4	Security Assurance Requirements Rationale	88
7	TOE Summary Specification	89
7.1	TOE Security Functionality	89
7.1.1	Auditing	89
7.1.2	Cryptography	93
7.1.3	Identification and authentication (I&A)	94

7.1.3.1	Control Panel I&A	94
7.1.3.2	IPsec I&A	96
7.1.4	Data protection and access control	97
7.1.4.1	Permission Sets	97
7.1.4.2	Job PINs.....	98
7.1.4.3	Job Encryption Passwords	98
7.1.4.4	Common access control	98
7.1.4.5	TOE function access control.....	99
7.1.4.6	Residual information protection	100
7.1.5	Protection of the TSF	100
7.1.5.1	Restricted forwarding of data to external interfaces (including fax separation)	100
7.1.5.2	TSF self-testing	100
7.1.5.3	Reliable timestamps	101
7.1.6	TOE access protection	101
7.1.6.1	Inactivity timeout.....	101
7.1.7	Trusted channel communication and certificate management	101
7.1.8	User and access management.....	103
8	Abbreviations, Terminology and References	105
8.1	Abbreviations	105
8.2	Terminology	107
8.3	References.....	108

List of Tables

Table 1: TOE Reference.....	14
Table 2: English-only guidance documentation.....	15
Table 3: IPsec user mappings to allowed network protocols	21
Table 4: Users	28
Table 5: User Data	29
Table 6: TSF Data	30
Table 7: TSF Data Listing.....	31
Table 8: SFR package functions	31
Table 9: SFR package attributes.....	32
Table 10: SFR mappings between 2600.1 and the ST	36
Table 11: SFR mappings of non-PP2600.1 SFRs and the ST (in the ST, but not required by or hierarchical to SFRs in PP2600.1)	37
Table 12: SFR mappings between 2600.1-CPY and the ST.....	38
Table 13: SFR mappings between 2600.1-DSR and the ST	38
Table 14: SFR mapping between 2600.1-FAX and the ST.....	38
Table 15: SFR mappings between 2600.1-PRT and the ST.....	39
Table 16: SFR mappings between 2600.1-SCN and the ST	39
Table 17: SFR mappings between 2600.1-SMI and the ST.....	39
Table 18: Mapping of security objectives to threats and policies	45
Table 19: Mapping of security objectives for the Operational Environment to assumptions, threats and policies.....	46
Table 20: Sufficiency of objectives countering threats	48
Table 21: Sufficiency of objectives holding assumptions	49
Table 22: Sufficiency of objectives enforcing Organizational Security Policies	52
Table 23: Security functional requirements for the TOE	57
Table 24: Auditable events	58
Table 25: Asymmetric cryptographic key generation	59
Table 26: Cryptographic key establishment	60
Table 27: Cryptographic operations for IPsec	61
Table 28: Cryptographic operations	61
Table 29: Common Access Control SFP.....	63
Table 30: Management of functions	69
Table 31: Management of security attributes	71
Table 32: Management of TSF data.....	72
Table 33: Mapping of security functional requirements to security objectives	77
Table 34: Security objectives for the TOE rationale.....	83
Table 35: TOE SFR dependency analysis	86
Table 36: Security assurance requirements.....	88
Table 37: Trusted channel connections	102

List of Figures

Figure 1: HCD physical diagram 16
Figure 2: HCD logical scope..... 19

1 Introduction

1.1 Security Target Identification

Title:	HP LaserJet Managed MFP E72525 / E72530 / E72535, HP Color LaserJet Managed MFP E77822 / E77825 / E77830, HP LaserJet Managed E82540 / E82550 / E82560, HP Color LaserJet Managed MFP E87640 / E87650 / E87660, HP LaserJet Enterprise MFP M631 / M632 / M633, HP LaserJet Managed MFP E62555 / E62565 / E62575, HP Color LaserJet Enterprise MFP M681 / M682, HP Color LaserJet Managed MFP E67550 / E67560 Security Target
Version:	2.62
Status:	Final
Date:	2019-08-16
Sponsor:	HP Inc.
Developer:	HP Inc.
Certification Body:	CSEC
Certification ID:	CSEC2017009
Keywords:	HP Inc., HP, LaserJet, Color LaserJet, LaserJet Managed, Color LaserJet Managed, LaserJet Enterprise, Color LaserJet Enterprise, hardcopy device, HCD, multifunction printer, MFP, E72530, E82560, E77830, E87660, E62555, E62565, E62575, E67550, E67560, M631, M632, M633, M681, M682

1.2 TOE Identification

The TOE is the HP FutureSmart 4.5.1 firmware for the HP LaserJet Managed MFP E72525 / E72530 / E72535, HP Color LaserJet Managed MFP E77822 / E77825 / E77830, HP LaserJet Managed MFP E82540 / E82550 / E82560, HP Color LaserJet Managed MFP E87640 / E87650 / E87660, HP LaserJet Enterprise MFP M631 / M632 / M633, HP LaserJet Managed MFP E62555 / E62565 / E62575, HP Color LaserJet Enterprise MFP M681 / M682, and HP Color LaserJet Managed MFP E67550 / E67560. The complete list of models and firmware versions is provided in [Table 1](#).

1.3 TOE Type

The TOE type is the internal firmware providing the functionality of a network multifunction printer (MFP).

1.4 TOE Overview

The TOE models are enterprise network MFPs designed to be shared by many client computers and users. These products are designed to meet the requirements of the [PP2600.1] protection profile.

The TOE contains functions for copying, printing, faxing, scanning, storing, and retrieving of documents. These hardcopy devices (HCDs), as they are called in [PP2600.1], are self-contained units that include processors, memory, networking, one or two storage drives (depending on the MFP model), an image scanner, and a print engine. The operating system, web servers, and Control Panel applications (i.e., applications that run internally on the HCD) reside within the firmware of the HCD.

The TOE is the contents of the firmware with the exception of the operating system, which is part of the Operational Environment.

Each model provides the following security features:

- Auditing
- Cryptography
- Identification and authentication
- Data protection and access control
- Protection of the TSF (restricted forwarding, TSF self-testing, timestamps)
- TOE access protection (Inactivity Timeout)
- Trusted channel communication and certificate management
- User and access management

1.4.1 Required and optional non-TOE hardware, software, and firmware

The following *required* components are part of the Operational Environment.

- The applicable MFP model from Table 1 for running the TOE firmware.
- Domain Name System (DNS) server
- One administrative client computer connected to the TOE in the role of an Administrative Computer. It must contain:
 - Web browser
- One or both of the following:
 - Lightweight Directory Access Protocol (LDAP) server
 - Windows domain controller/Kerberos server
- Syslog server
- Windows Internet Name Service (WINS) server

The following *optional* components are part of the Operational Environment.

- Client computers connected to the TOE in a non-administrative computer role
- HP Print Drivers, including the HP Universal Print Driver, for client computers (for submitting print job requests from client computers)
- SNMP tool that supports SNMPv1/v2 for reading objects and SNMPv3 for reading and writing objects installed on the administrative client computer connected to the TOE in the role of an Administrative Computer

- Microsoft SharePoint ('Flow' models only)
- Remote file systems:
 - File Transfer Protocol (FTP)
 - Server Message Block (SMB)
- Simple Mail Transfer Protocol (SMTP) gateway
- Network Time Protocol (NTP) server

1.4.2 Intended method of use

[PP2600.1] is defined for a commercial information processing environment in which a high level of document security, network security, and security assurance are required.

The TOE is intended to be used in non-hostile, networked environments where TOE users have direct physical access to the HCD for printing, copying, faxing, scanning, and storing of documents. The physical environment should be reasonably controlled and/or monitored where physical tampering of the HCD would be evident and noticed.

The TOE can be connected to multiple client computers via a wired local area network using HP's Jetdirect Inside in the evaluated configuration. The evaluated configuration uses secure mechanisms for communication between the network client computers and the TOE. The TOE is managed by one designated administrative computer. The TOE is not intended be connected to the Internet.

The evaluated configuration contains a built-in user identification and authentication database (a.k.a. sign in method) used for Local Device Sign In that is part of the TOE. It also supports a Windows domain controller (via Kerberos) for a feature called Windows Sign In and a Lightweight Directory Access Protocol (LDAP) authentication server for a feature called LDAP Sign In to identify and authenticate network users. The Windows domain controller and LDAP server are part of the Operational Environment.

The evaluated configuration supports the Embedded Web Server (EWS) interface for managing the TOE using a web browser over HTTP. (Web browsers are part of the Operational Environment.)

The Universal Serial Bus (USB) ports are disabled in the evaluated configuration.

1.5 TOE Description

1.5.1 TOE models and firmware versions

Table 1 shows the HCD models included in this evaluation. The table also shows the 'flow' model designation, which can be found in the product model name. Flow models have the ability to scan and save documents to Microsoft SharePoint servers whereas non-flow models do not.

Physically speaking, all models use the same ASIC that contains the processor which executes the TSF executable code. A4 models contain one field-replaceable nonvolatile storage drive, and A3 models two nonvolatile storage drives. All models have a Control Panel for operating the HCD locally and Ethernet network capability for connecting to a network. They all support submission of print jobs over the network and remote administration over the network. The main physical differences between models are floor models versus table top models, the number and size of paper feeders, the scan and print speed, the number of output bins, and whether they contain a stapler/stacker. Some models come with an analog fax modem included versus others where the modem is optional accessory.

Table 1 includes a mapping of the System firmware versions to the TOE models.

Type	Series	Model	Product number	HP FutureSmart 4.5.1 firmware	
				System firmware version	JDI firmware version
A3	HP LaserJet Managed MFP E72525	E72525dn	Z8Z06A	2405268_022695	JSI24050246
		Flow E72525z	Z8Z07A		
	HP LaserJet Managed MFP E72530	E72530dn	Z8Z08A		
		Flow E72530z	Z8Z09A		
	HP LaserJet Managed MFP E72535	E72535dn	Z8Z10A		
		Flow E72535z	Z8Z11A		
	HP LaserJet Managed MFP E82540	E82540dn	Z8Z18A	2405268_022693	
		Flow E82540z	Z8Z19A		
	HP LaserJet Managed MFP E82550	E82550dn	Z8Z20A		
		Flow E82550z	Z8Z21A		
	HP LaserJet Managed MFP E82560	E82560dn	Z8Z22A		
		Flow E82560z	Z8Z23A		
	HP Color LaserJet Managed MFP E77822	E77822dn	Z8Z00A	2405268_022694	
		Flow E77822z	Z8Z01A		
	HP Color LaserJet Managed MFP E77825	E77825dn	Z8Z02A		
		Flow E77825z	Z8Z03A		
	HP Color LaserJet Managed MFP E77830	E77830dn	Z8Z04A		
		Flow E77830z	Z8Z05A		
HP Color LaserJet Managed MFP E87640	E87640dn	Z8Z12A	2405268_022692		
	Flow E87640z	Z8Z13A			
HP Color LaserJet Managed MFP E87650	E87650dn	Z8Z14A			
	Flow E87650z	Z8Z15A			

Type	Series	Model	Product number	HP FutureSmart 4.5.1 firmware		
				System firmware version	JDI firmware version	
	HP Color LaserJet Managed MFP E87660	E87660dn	Z8Z16A			
		Flow E87660z	Z8Z17A			
A4	HP LaserJet Enterprise MFP M631	M631dn	J8J63A	2405268_022699		
		Flow M631h	J8J64A			
		M631z	J8J65A			
	HP LaserJet Enterprise MFP M632	M632h	J8J70A			
		M632fht	J8J71A			
		Flow M632z	J8J72A			
	HP LaserJet Enterprise MFP M633	M633fh	J8J76A			
		Flow M633z	J8J78A			
	HP LaserJet Managed MFP E62555	E62555dn	J8J66A			
	HP LaserJet Managed MFP E62565	E62565hs	J8J73A			
		E62565h	J8J74A			
		Flow E62565z	J8J79A			
	HP LaserJet Managed MFP E62575	Flow E62575z	J8J80A			
	HP Color LaserJet Enterprise MFP M681	M681dh	J8A10A			2405268_022691
		M681f	J8A11A			
Flow M681f		J8A12A				
Flow M681z		J8A13A				
HP Color LaserJet Enterprise MFP M682	Flow M682z	J8A17A				

Type	Series	Model	Product number	HP FutureSmart 4.5.1 firmware	
				System firmware version	JDI firmware version
	HP Color LaserJet Managed MFP E67550	E67550dh	L3U66A		
	HP Color LaserJet Managed MFP E67560	Flow E67560z	L3U70A		

Table 1: TOE Reference

The MFP models in the table above are classified by the type of hardcopy document size they are designed to handle (e.g. A4 versus A3).

The following table lists the English-guidance documentation for the TOE:

MFP models	Title	Edition	Reference
All	Common Criteria Evaluated Configuration Guide for HP Multifunction Printers HP LaserJet Enterprise MFP M631/M632/M633, HP Color LaserJet Enterprise MFP M681/M682, HP LaserJet Managed MFP E72525/E72530/E72535/ E82540/E82550/E82560/E62555/E62565/E62575, HP Color LaserJet Managed MFP E77822/E77825/ E77830/E87640/E87650/E87660/E67550/E67560	1	CCECG
E82540, E82550, E82560, E87640, E87650, E87660	HP LaserJet Managed MFP E82540, HP LaserJet Managed MFP E82550, HP LaserJet Managed MFP E82560, HP LaserJet Managed Flow MFP E82540, HP LaserJet Managed Flow MFP E82550, HP LaserJet Managed Flow MFP E82560, HP Color LaserJet Managed MFP E87640, HP Color LaserJet Managed MFP E87650, HP Color LaserJet Managed MFP E87660, HP Color LaserJet Managed Flow MFP E87640, HP Color LaserJet Managed Flow MFP E87650, HP Color LaserJet Managed Flow MFP E87660 User Guide	2	E825_E876-UG
E72525, E72530, E72535, E77822, E77825, E77830	HP LaserJet Managed MFP E72525, HP LaserJet Managed MFP E72530, HP LaserJet Managed MFP E72535, HP LaserJet Managed Flow MFP E72525, HP LaserJet Managed Flow MFP E72530, HP LaserJet Managed Flow MFP E72535, HP Color LaserJet Managed MFP E77822, HP Color LaserJet Managed MFP E77825, HP Color LaserJet Managed MFP E77830, HP Color LaserJet Managed Flow MFP E77822, HP Color LaserJet Managed Flow MFP E77825, HP Color LaserJet Managed Flow MFP E77830	2	E725_E778-UG

MFP models	Title	Edition	Reference
	User Guide		
M631, M632, M633, E62555, E62565, E62575	HP LaserJet Enterprise MFP M631, M632, M633 User Guide	3	M63_E625-UG
M681, M682, E67550, E67560	HP Color LaserJet Enterprise MFP M681, M682 User Guide	1	M68_E675-UG

Table 2: English-only guidance documentation

The firmware, [CCECG], and other supporting files are packaged in a single ZIP file (i.e., a file in ZIP archive file format). This ZIP file is available for download from the HP Inc. website. The firmware is packaged in this ZIP file as a single firmware bundle. This firmware bundle contains the HP FutureSmart firmware, which in turn contains the System firmware and JDI firmware.

1.5.2 TOE architecture

As mentioned previously, the TOE is the firmware of an MFP designed to be shared by many client computers and human users. It performs the functions of printing, copying, scanning, faxing, storing, and retrieving of documents. It can be connected to a wired local network through the embedded Jetdirect Inside's built-in Ethernet, to an analog telephone line using its internal analog fax modem, or to a USB device using its USB port (but the use of which must be disabled in the evaluated configuration).

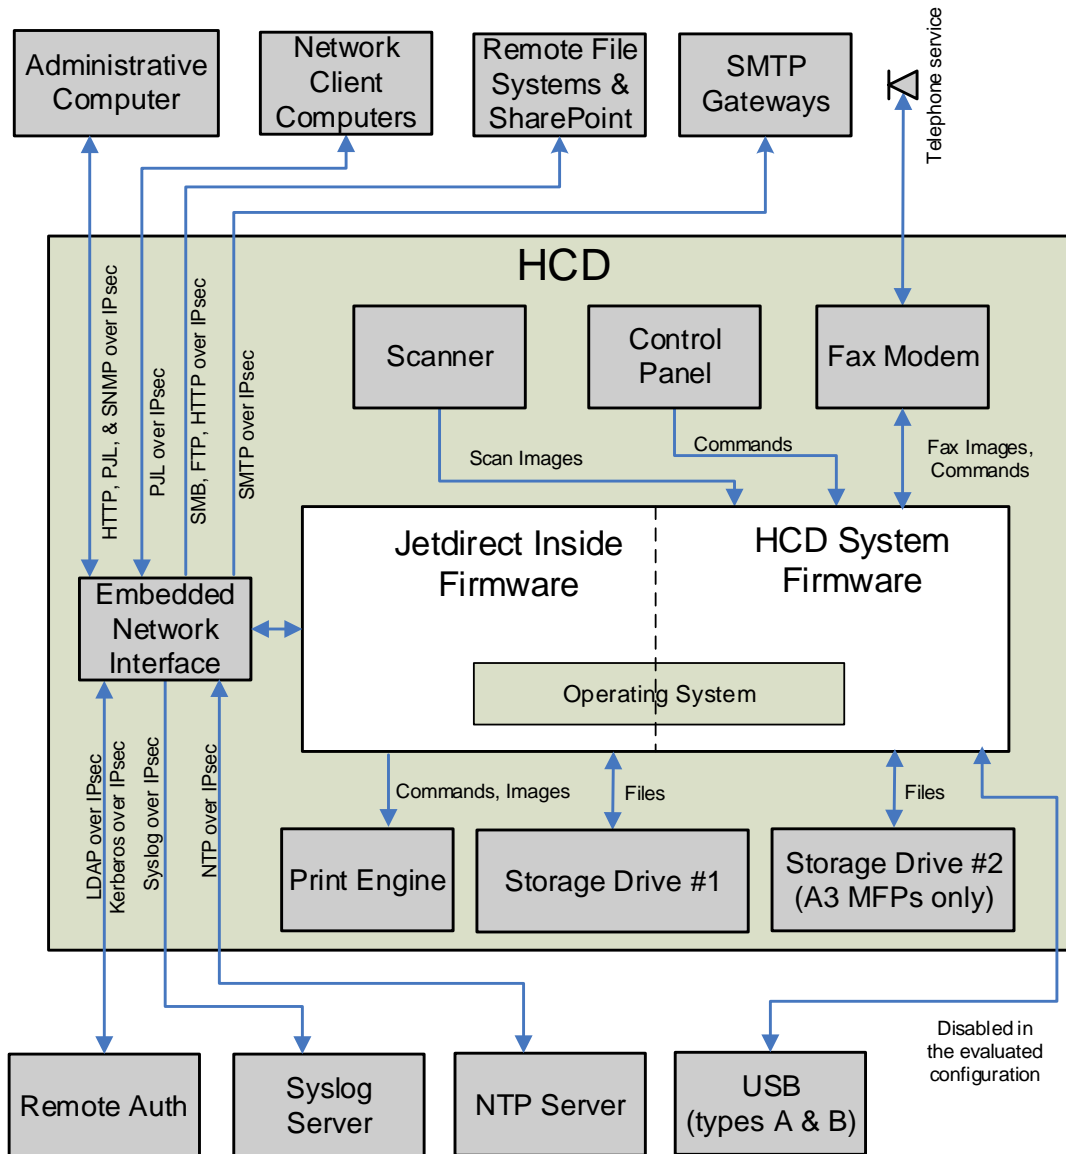


Figure 1: HCD physical diagram

Figure 1 shows a high-level physical diagram of an HCD with the unshaded areas representing the TOE and the shaded areas indicating components that are part of the Operational Environment.

At the top of this figure is the Administrative Computer which connects to the TOE using Internet Protocol Security (IPsec) with X.509v3 certificates for both mutual authentication and for protection of data from disclosure and alteration. This computer can administer the TOE using the following interfaces over the IPsec connection:

- Embedded Web Server (EWS)
- Simple Network Management Protocol (SNMP)

The HTTP-based EWS interface allows administrators to remotely manage the features of the TOE using a web browser.

The SNMP network interface allows administrators to remotely manage the TOE using external SNMP-based administrative applications.

Printer Job Language (PJL) is used in a non-administrative capacity by the Administrative Computer. The Administrative Computer uses PJL to send print jobs to the TOE as well as to receive job status. In general, PJL supports password-protected administrative commands, but in the evaluated configuration these commands are disabled. For the purposes of this Security Target, we define the PJL Interface as PJL data sent to networking port 9100 on the TOE.

The TOE protects all non-broadcast/non-multicast network communications with IPsec, which is part of the embedded Jetdirect Inside firmware. Though IPsec supports multiple authentication methods, in the evaluated configuration, both ends of the IPsec connection are authenticated using X.509v3 certificates. An identity certificate for the TOE must be created outside the TOE, signed by a Certificate Authority (CA), and imported (added) into the TOE along with the Certificate Authority's CA certificate.

Because IPsec authenticates the computers (IPsec authenticates the computer itself; IPsec does not authenticate the individual users of the computer), access to the Administrative Computer should be restricted to TOE administrators only.

The TOE distinguishes between the Administrative Computer and Network Client Computers by using IP addresses, IPsec, and the embedded Jetdirect Inside's internal firewall. In the evaluated configuration, the number of Administrative Computers used to manage the TOE is limited to one and the Device Administrator Password must be set.

The evaluated configuration supports the following SNMP versions:

- SNMPv1 read-only
- SNMPv2c read-only
- SNMPv3

Network Client Computers connect to the TOE using IPsec with X.509v3 certificates to protect the communication and to mutually authenticate. These client computers can send print jobs to the TOE using the PJL Interface as well as receive job status.

The TOE supports an optional analog telephone line connection for sending and receiving faxes. The Control Panel uses identification and authentication to control access for sending analog faxes. Because the fax protocol doesn't support authentication of incoming analog fax phone line users, anyone can connect to the analog fax phone line (unless the number has been added to the Blocked Fax Numbers list), but the only function an incoming analog fax phone line user can perform is to transmit a fax to the TOE.

The TOE protects stored non-fax jobs with either a 4-digit Job PIN or by accepting (and storing) an encrypted print job from a client computer. Both protection mechanisms are optional by default and are mutually exclusive of each other if used. In the evaluated configuration, all stored non-fax jobs must either be assigned a 4-digit Job PIN or be an encrypted print job.

The TOE also supports Microsoft SharePoint (*flow* MFP models only) and remote file systems for the storing of scanned documents. The TOE uses IPsec with X.509v3 certificates to protect the communications and to mutually authenticate to SharePoint and the remote file systems. For remote file system connectivity, the TOE supports the File Transfer Protocol (FTP) and the Server Message Block (SMB) protocol. (SharePoint is HTTP-based.) The MFP is capable of encrypting stored document files according to the Adobe PDF specification.

The TOE can be used to email scanned documents. In addition, the TOE can send email alert messages to administrator-specified email addresses, or send automated emails regarding product configuration and MFP supplies to HP. The TOE supports protected communications between itself and Simple Mail Transfer Protocol (SMTP) gateways. It uses IPsec with X.509v3 certificates to protect the communications and to mutually authenticate with the SMTP gateway. The TOE can only protect unencrypted emails up to the SMTP gateway. It is the responsibility of the Operational Environment to protect emails from the SMTP gateway to the email's destination. Also, the TOE can only send emails; it does not accept inbound emails.

Each HCD contains a user interface called the Control Panel. The Control Panel consists of a touchscreen LCD, and a physical home screen button that is attached to the HCD. In addition, *flow* MFP models include a pull-out keyboard as part of the Control Panel. The Control Panel is the physical interface that a user

uses to communicate with the TOE when physically using the HCD. The LCD screen displays information such as menus and status to the user. It also provides virtual buttons to the user such as an alphanumeric keypad for entering usernames and passwords. When a user signs in at the Control Panel, a Permission Set is associated with their session which determines the functions the user is permitted to perform.

The TOE's Control Panel supports local and remote sign-in methods for I&A of users.

- Local sign-in method
 - Local Device Sign In
- Remote sign-in methods
 - LDAP Sign In
 - Windows Sign In

The Local Device Sign In method maintains the account information within the TOE. Only the Device Administrator account, which is an administrative account, is supported through this method in the evaluated configuration. The remote sign-in methods are called LDAP Sign In and Windows Sign In (i.e., Kerberos). The TOE uses IPsec with X.509v3 certificates to protect both the LDAP and Kerberos communications.

The Scanner in [Figure 1](#) converts hardcopy documents into electronic form. The Print Engine in [Figure 1](#) converts electronic documents into hardcopy form.

Depending on the MFP model, the MFP contains either one or two field-replaceable nonvolatile storage drives (a.k.a. storage drives) that reside in the Operational Environment. If the MFP model is an A4 MFP, the MFP model contains one storage drive that can be either the HP Secure High-Performance Hard Disk or eMMC. If the MFP model is an A3 MFP, the MFP model contains two storage drives. The first storage drive can be either the HP Secure High-Performance Hard Disk or eMMC, and the second storage drive is the HP Secure High-Performance Hard Disk. For MFP models that have eMMC, the HP Secure High-Performance Hard Disk is available as an optional accessory to replace eMMC.

The storage drive contains a section called Job Storage which is a user-visible filesystem where stored print, stored copy, and stored received faxes are stored/held. If the MFP model is an A3 MFP, the storage drive that contains the Job Storage section is the second storage drive which is the HP Secure High-Performance Hard Disk. If the storage drive that contains the Job Storage section is eMMC, all jobs in Job Storage are automatically deleted when the HCD is powered off. If the storage drive that contains the Job Storage section is the HP Secure High-Performance Hard Disk, all jobs in Job Storage are automatically persisted across power cycles except Personal Jobs, which are a type of stored print job. Personal Jobs can be persisted across power cycles or deleted depending on the how the administrator configures the TOE. (Job types are discussed in [section 1.5..2.1.](#))

The TOE supports the auditing of document-processing functions and security-relevant events by generating and forwarding audit records to a remote syslog server. The TOE uses IPsec with X.509v3 certificates to protect the communications between itself and the syslog server and for mutual authentication of both endpoints.

The Jetdirect Inside Firmware and HCD System Firmware components comprise the firmware on the system. They are shown as two separate components but they both share the same operating system (OS). The operating system is part of the Operational Environment. Both firmware components also contain an Embedded Web Server (EWS).

The Jetdirect Inside firmware includes SNMP, IPsec, a firewall, and the management functions for managing these network-related features. The Jetdirect Inside firmware also provides the network stack and drivers controlling the TOE's embedded Ethernet interface.

The HCD System Firmware controls the overall functions of the TOE from the Control Panel to the storage drive(s) to the print jobs.

[Figure 2](#) shows the HCD boundary in grey and the firmware (TOE) boundary in blue (the TOE being comprised of the HCD System firmware and the Jetdirect Inside firmware excluding the underlying

operating system). The Jetdirect Inside firmware provides the network connectivity and network device drivers used by the HCD System firmware. The HCD System firmware and Jetdirect Inside firmware share the same operating system (which is part of the Operational Environment). The HCD System firmware also includes internal Control Panel applications that drive the functions of the TOE. Both firmware components work together to provide the security functionality defined in this document for the TOE.

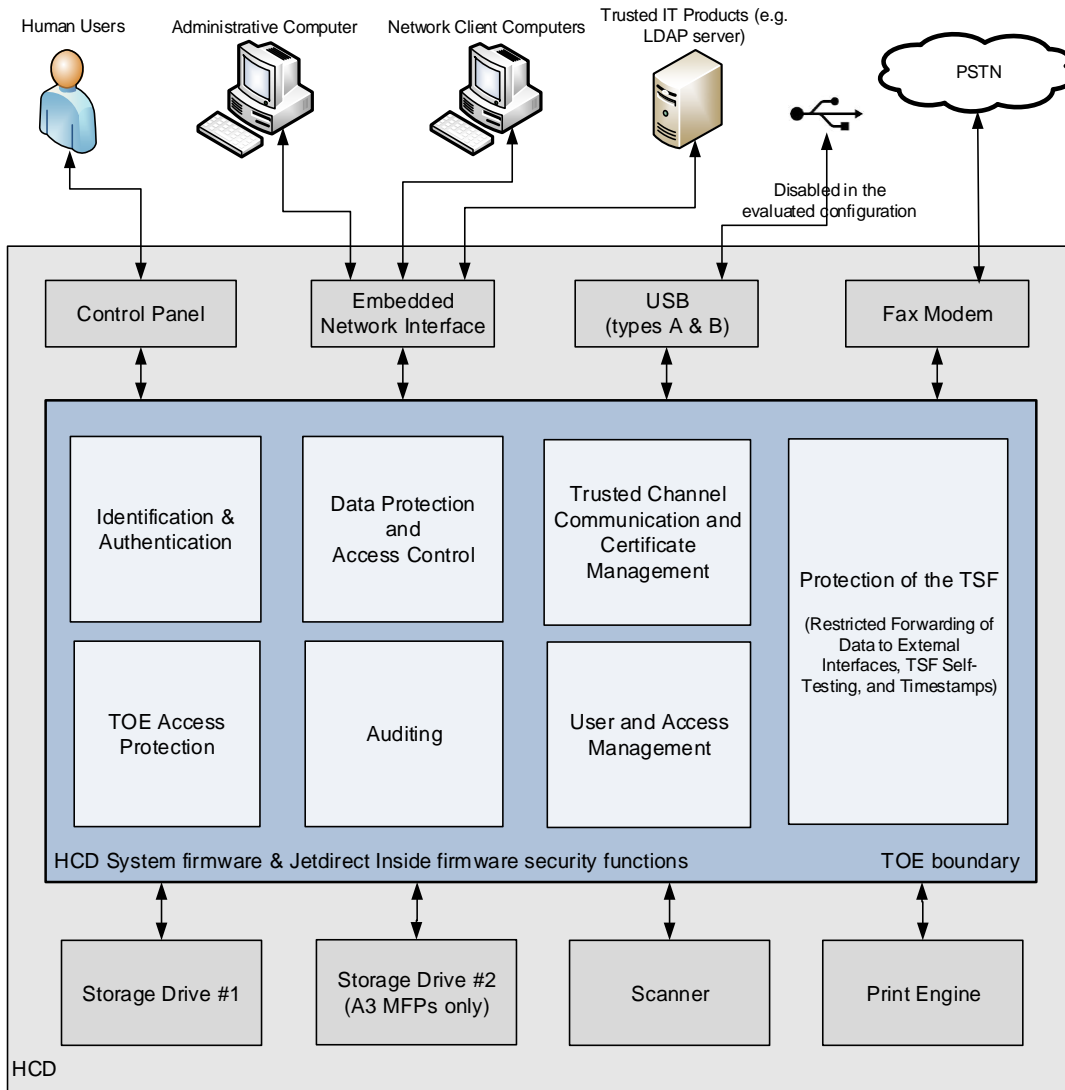


Figure 2: HCD logical scope

1.5.3 TOE security functionality (TSF) summary

1.5.3.1 Auditing

The TOE performs auditing of document-processing functions and security-relevant events. Both the Jetdirect Inside and HCD System firmware generate audit records. The TOE connects and sends audit records to a syslog server for long-term storage and audit review. (The syslog server is part of the Operational Environment.)

1.5.3.2 Cryptography

The TOE uses IPsec to protect its communications channels. The QuickSec cryptographic library, which is part of the Operational Environment, is used to supply the cryptographic algorithms for IPsec. See [section 1.5.3.7](#) for more information.

The TOE supports key derivation and decryption for printing encrypted stored print jobs. Both the key derivation function and decryption algorithm used by the TOE for this are included in the TOE. See [section 1.5.3.4.3](#) for more information.

The product includes functionality to encrypt certain types of scan jobs using the Adobe PDF specification. This encryption functionality is not part of the claimed security functions of the TOE. Instead, the TOE uses IPsec to protect its communication channels.

The product includes functionality to encrypt email using S/MIME and X.509v3 certificates. This encryption functionality is **not** part of the claimed security functions of the TOE. Instead, the TOE uses IPsec to protect its communication channels.

1.5.3.2.1 Cryptography outside the scope of the TOE

This section exists to inform the reader that the HCD contains other cryptography that is outside the scope of the TOE, is not part of this evaluation, and is not used to fulfill any of the [PP2600.1] requirements.

The HP High-Performance Secure Hard Disk provides hardware-based cryptography and persistent storage to securely manage sensitive document and system data. Data on this drive is encrypted and the encryption key is locked to the HCD. The cryptographic functionality is transparent to the TOE and to the user. Not all MFP models in this evaluation contain this storage drive. The MFP models that do not, instead contain eMMC. For MFP models that contain eMMC, the HP High-Performance Secure Hard Disk is available as an accessory (HP part #: B5L29-67903).

Certain areas of the eMMC are encrypted under the control of the TOE using the HCD's hardware.

1.5.3.3 Identification and authentication

1.5.3.3.1 Control Panel I&A

The HCD has a Control Panel used to select a function (a.k.a. Control Panel application) to be performed. The Control Panel supports both local and remote sign-in methods.

The mechanism for the local sign-in method, which is part of the TOE firmware, is called:

- Local Device Sign In

The remote sign-in methods used by the TOE are:

- LDAP Sign In
- Windows Sign In (via Kerberos)

Although the Local Device Sign In method supports multiple accounts, only the built-in Device Administrator account (U.ADMINISTRATOR) is to be used with this method in the evaluated configuration. The administrator must not create any Local Device Sign In accounts.

For successful authentication using a remote sign-in method, Control Panel users must enter their username and password as defined on the remote authentication server.

All users must sign in prior to being allowed to access any protected Control Panel applications and features. Prior to signing in, the TOE can be configured to display a Welcome message on which the user must press "OK" before the user can access the sign-in screen. At the sign-in screen, the user may get help on various MFP functions or select a sign-in method prior to signing in. The sign-in method selections are:

- Local Device Sign In:

- Administrator Access Code
 - LDAP Sign In (if configured and enabled)
 - Windows Sign In (if configured and enabled)

When users sign in through the Control Panel, the TOE displays dots for each character of access code or password typed to prevent onlookers from viewing another user's authentication data. The TOE also contains account lockout functionality for the built-in Device Administrator account to help prevent password discovery through a brute-force attack.

1.5.3.3.2 IPsec I&A

Client computers can connect to the TOE to submit print jobs and to manage the TOE. The TOE uses IPsec to identify and mutually authenticate client computers that attempt to connect to the TOE.

The client computers that connect to the TOE are considered IPsec users and are classified as either Network Client Computers or the Administrative Computer. The TOE uses IP addresses to identify these users and Rivest-Shamir-Adleman (RSA) X.509v3 certificates to authenticate the users. The IP address of a connecting client computer must be defined in the TOE's IPsec/Firewall in order for the computer to be considered authorized to access the TOE. Any client computer not defined in the TOE's IPsec/Firewall is considered unauthorized and is blocked by the firewall from accessing the TOE.

The TOE uses IPsec/Firewall address templates, service templates, and rules to map IP addresses to network service protocols. An address template contains one or more IP addresses. A service template contains one or more allowed network service protocols. A rule contains a mapping of an address template to a service template. Through the rules, an administrator determines the User Role of the client computers (i.e., the administrator determines which client computer is the Administrative Computer and which client computers are the Network Client Computers). In the evaluated configuration, the IPsec/Firewall only allows the Administrative Computer to connect to all interfaces supported by the TOE. The Network Client Computers are limited to just the PJI Interface (TCP port 9100). Table 3 shows the mapping of IPsec users to their allowed network protocols.

IPsec user	Allowed network protocol access
Administrative Computer (U.ADMINISTRATOR)	EWS (HTTP), SNMP, PJI
Network Client Computer (U.NORMAL)	PJI

Table 3: IPsec user mappings to allowed network protocols

Because IPsec mutual authentication is performed at the computer level, not the user level, the computer allowed by the firewall to access the TOE via EWS and SNMP must itself be the Administrative Computer. This means that non-TOE administrative users should not be allowed to logon to the Administrative Computer because every user of the Administrative Computer is potentially a TOE administrator.

IPsec is configured to use X.509v3 certificates via the Internet Key Exchange (IKE) protocols. Both IKEv1 and IKEv2 are supported in the evaluated configuration.

In addition, the TOE can contact many types of trusted IT products using IPsec and mutual authentication. The TOE contacts these trusted IT products either to send data to them (e.g. send an email to the SMTP Gateway for forwarding to the email's destination) or to request information from them (e.g., authenticate a user using LDAP). Before sending data to or requesting information from these trusted IT products, the TOE mutually authenticates the trusted IT products via IPsec using X.509v3 certificates.

1.5.3.4 Data protection and access control

1.5.3.4.1 Permission Sets

The TOE controls user access to functions available at the Control Panel using permissions. Each Control Panel application and protected feature has an associated permission. A permission is configured to either grant or deny access. Permissions are defined in Permission Sets (a.k.a. User Roles) which are assigned to users. To execute a Control Panel application or protected feature, the applicable permission must be configured to grant access in the Permission Set applied to a user. The Permission Set applied to a user is a combination of Permission Sets assigned to the user.

The TOE contains built-in Permission Sets. The built-in Permission Sets are:

- Device Guest
- Device Administrator
- Device User

Built-in Permission Sets cannot be deleted or renamed. Additionally, the permissions defined in the Device Administrator Permission Set cannot be configured (i.e. the permissions are always set to grant access).

In addition to the built-in Permission Sets, the TOE provides the ability to add custom Permission Sets.

Permission Sets are stored in the TOE and are managed via the EWS.

The following table lists the access control level each Permission Set provides, and the User Role each Permission Set is assigned to in the evaluated configuration.

Permission Set	Access control level	Assigned to User Role
Device Guest	None (The Device Guest Permission Set has all permissions configured to deny access.)	All
Device Administrator	Administrative (The Device Administrator Permission Set has all permissions set to grant access. With all permissions set to grant access, the Device Administrator Permission Set provides access to all functions.)	U.ADMINISTRATOR
Device User	Non-administrative (The Device User Permission Set has all permissions for administrative functions configured to deny access.)	U.NORMAL

Permission Set	Access control level	Assigned to User Role
Custom (if any are added by U.ADMINISTRATOR)	Non-administrative (The Device User Permission Set has all permissions for administrative functions configured to deny access.)	U.NORMAL

1.5.3.4.2 Job PINs

Users control access to print (non-encrypted) and copy jobs that they place in Job Storage by assigning Job PINs to these jobs (required in the evaluated configuration). Job PINs must be 4 digits in length. Job PINs limit access to these jobs while they reside on the TOE and allow users to control when the jobs are printed so that physical access to the hard copies can be controlled.

1.5.3.4.3 Job Encryption Password

The TOE can store and decrypt encrypted stored print jobs received from a client computer that has the HP Universal Printer Driver installed. A stored print job is first encrypted by the client computer and protected with a user-specified Job Encryption Password. The job is sent encrypted to the TOE and stored encrypted by the TOE.

To print or delete an encrypted stored print job at the Control Panel, a non-administrative user must provide the correct Job Encryption Password for the encrypted stored print job. An administrative user can delete an encrypted stored print job at the Control Panel without providing a Job Encryption Password but must provide the correct Job Encryption Password to print the job.

1.5.3.4.4 Common access control

The TOE protects each non-fax job in Job Storage from non-administrative users using a user identifier and a Job PIN or using just a Job Encryption Password. The user identifier for a print job received from a client computer is either automatically assigned by that client computer or assigned by the user sending the print job from the client computer. For copy jobs, the user identifier is assigned by the TOE. Every non-fax job in Job Storage is assigned either a Job PIN or a Job Encryption Password at job creation time.

The default rules for a non-administrative (U.NORMAL) user for accessing a non-fax job in Job Storage are:

- if the job is Job PIN protected:
 - the job owner (i.e., the authenticated user who matches the job's user identifier) can access the job without supplying the Job PIN
 - any non-owner authenticated user who supplies the correct Job PIN can access the job
- if the job is Job Encryption Password protected, any authenticated user who supplies the correct Job Encryption Password can access the job

A Control Panel administrator (U.ADMINISTRATOR) user has a permission in their Permission Set that allows the administrator to delete a non-fax job in Job Storage.

The TOE protects each fax job in Job Storage through the Permission Set mechanism. A user must have a specific fax permission in their Permission Set to access received fax jobs in Job Storage.

1.5.3.4.5 TOE function access control

For Control Panel users, the TOE controls access to functions using permissions. A permission is configured to either grant or deny access. Permissions are defined in Permission Sets, which act as User Roles.

Each Control Panel application and protected feature has an associated permission. To access a Control Panel application or protected feature, the Permission Set associated with the user's Control Panel session must contain the applicable permission. The Permission Set associated with a user's Control Panel session is a combination of Permission Sets assigned to the user.

Administrators can change/modify the sign-in method mapped to each application. In addition, the TOE contains a function that allows administrators to select if the sign-in method application mappings are enforced or ignored by the TOE. This function is called "Allow users to choose alternate sign-in methods at the product control panel." When this function is disabled, the TOE enforces the "sign in method to application" mappings and prunes (reduces) the user's session Permission Set accordingly. When this function is enabled, the sign in method mappings are ignored by the TOE and the user's session Permission Set remains unchanged.

For IPsec users, the TOE uses the IPsec/Firewall to control access to the supported network service protocols. The IPsec/Firewall contains the IP addresses of authorized client computers grouped into address templates and the network service protocols grouped into service templates. The administrator maps an address template to a service template using an IPsec/Firewall rule. Service templates, therefore, act as the User Roles. IP addresses of computers not contained in a rule are denied access to the TOE.

1.5.3.4.6 Residual information protection

The TOE protects deleted objects by making them unavailable to TOE users via the TOE's interfaces. This prevents TOE users from attempting to recover deleted objects of other users via the TOE interfaces.

1.5.3.5 Protection of the TSF

1.5.3.5.1 Restricted forwarding of data to external interfaces

The TOE allows an administrator to restrict the forwarding of data received from an External Interface to the Shared-medium Interface. The TOE does not provide a pathway or support for commands necessary to achieve network access.

1.5.3.5.2 TSF self-testing

The TOE contains a suite of self tests to test specific security functionality of the TOE. It contains data integrity checks for testing specific TSF Data of the TOE and for testing the stored TOE executables.

1.5.3.5.3 Reliable timestamps

The TOE contains a system clock that is used to generate reliable timestamps. In the evaluated configuration, TOE can optionally be configured to synchronize its system clock with a Network Time Protocol (NTP) server.

1.5.3.6 TOE access protection

1.5.3.6.1 Inactivity timeout

The Control Panel supports an Inactivity Timeout in case users forget to sign out of the Control Panel after signing in.

1.5.3.7 Trusted channel communication and certificate management

The TOE supports IPsec to protect data being transferred over the Shared-medium Interface. IPsec along with IKE use Diffie-Hellman (DH) key establishment (a.k.a. key exchange) to establish the key used for the secure channel, IP addresses and RSA X.509v3 certificates to identify and authenticate the endpoint, and the Advanced Encryption Standard (AES) with cipher block chaining (CBC) to protect the data transfers between the TOE and the endpoint using the key derived from the key establishment. DH uses the Digital Signature Algorithm (DSA) for key generation. In addition, the Secure Hash Algorithm (SHA) and Hashed Message Authentication Code (HMAC) based on SHA are used as part of the IPsec/IKE protocol. A deterministic random bit generator (DRBG)—specifically the counter DRBG CTR_DRBG(AES)

that uses AES—is used to generate cryptographically random numbers for creating encryption keys, key material, and secret keys.

The IPsec and IKE cryptographic algorithms are all supplied by the QuickSec cryptographic library. The QuickSec cryptographic library is part of the Operational Environment, but the TOE controls the usage of these algorithms.

In the evaluated configuration, the following IPsec cryptographic algorithms are supported:

- RSA 2048-bit, and 3072-bit signature generation and verification (Operational Environment)
- DSA 2048-bit, 3072-bit, 4096-bit, 6144-bit, and 8192-bit key pair generation (Operational Environment)
- DH (IKEv1, IKEv2) key establishment / exchange (Operational Environment)
- AES-128, AES-192, and AES-256 in CBC mode for data transfers (Operational Environment)
- AES-256 (with ECB mode) for the CTR_DRBG(AES) (Operational Environment)
- CTR_DRBG(AES) (Operational Environment)
- SHA-1, SHA-256, SHA-384, and SHA-512 hashing (Operational Environment)
- HMAC-SHA1-96 (Operational Environment)
- HMAC-SHA-256-128 (Operational Environment)
- HMAC-SHA-384-192 (Operational Environment)
- HMAC-SHA-512-256 (Operational Environment)

In addition, the TOE provides certificate management functions used to manage X.509v3 certificates used for IPsec authentication.

1.5.3.8 User and access management

The TOE provides management capabilities for managing its security functionality. The TOE supports the following roles:

- Administrator (U.ADMINISTRATOR)
- Normal User (U.NORMAL)

Administrators have the authority to manage the security functionality of the TOE and to manage normal users. Normal users can only manage user data that they have access to on the TOE.

1.5.4 TOE boundaries

1.5.4.1 Physical

The physical boundary of the TOE is the programs and data stored in the firmware of the HCD (except for the embedded operating system) and the English-language guidance documentation.

It is typical for an HCD, and thus the TOE, to be shared by many users and for those users to have direct physical access to the HCD. By design, users have easy access to some of the hardware features, such as the Control Panel, the paper input trays, the paper output trays, the scanner, and the power button. But other features such as the processor, volatile memory, and storage drive(s) are located inside the HCD in the formatter cage. The formatter cage can be secured to the HCD chassis using a combination lock, thus, restricting normal user access to the components inside the cage.

Because of the restricted access to the storage drive, the drive is considered a non-removable non-volatile storage device from the perspective of [PP2600.1].

Due to the physical accessibility of the HCDs, they must be used in non-hostile environments. Physical access should be controlled and/or monitored.

QuickSec version 5.1 ([QuickSec51]) toolkit implements the TOE's IPsec including the IPsec/Firewall. The QuickSec toolkit includes a cryptographic library (a.k.a. encryption library) and an IPsec library. The QuickSec cryptographic library used by QuickSec for all IPsec cryptography is part of the Operational Environment.

QuickSec is developed and tested by INSIDE Secure. The QuickSec cryptographic algorithms used by the TOE were tested during the evaluation against a reference implementation of IPsec.

Regarding the SMTP gateway, the TOE can only provide protection of sent emails to the device with which the TOE has the IPsec connection (i.e., the TOE only provides protection between the TOE and SMTP gateway). After that point, the Operational Environment must provide the remaining protection necessary to transfer the email from the SMTP gateway to the email's addressee(s).

1.5.4.2 Logical

The security functionality provided by the TOE has been described above and includes:

- Auditing
- Cryptography
- Identification and authentication
- Data protection and access control
- Protection of the TSF (restricted forwarding, TSF self-testing, and timestamps)
- TOE access protection (Inactivity Timeout)
- Trusted channel communication and certificate management
- User and access management

1.5.4.3 Evaluated configuration

The following items will need to be adhered to in the evaluated configuration:

- HP Digital Sending Software (DSS) must be disabled
- Device Administrator Password must be set as per P.ADMIN.PASSWORD
- Only one Administrative Computer is used to manage the TOE
- Third-party solutions are not installed on the TOE
- All non-fax stored jobs must be assigned a Job PIN or Job Encryption Password
- All received faxes must be converted into stored faxes
- Fax Archive must be disabled
- Fax Forwarding must be disabled
- Internet Fax and LAN Fax must be disabled
- PC Fax Send must be disabled
- Device USB and Host USB plug and play must be disabled
- Firmware upgrades sent as print jobs through P9100 interface must be disabled
- Jetdirect Inside management via telnet and FTP must be disabled

- Jetdirect XML Services must be disabled
- External file system access through P JL and PS must be disabled
- IPsec authentication using X.509v3 certificates must be enabled (IPsec authentication using Kerberos or Pre-Shared Key is not supported)
- IPsec Authentication Headers (AH) must be disabled
- Device Guest permission set must have zero permissions enabled (this disables the Guest role)
- SNMP support limited to:
 - SNMPv1 read-only
 - SNMPv2c read-only
 - SNMPv3
- The Service PIN, used by a customer support engineer to access functions available to HP support personnel, must be disabled
- Near Field Communication (NFC) must be disabled
- Wireless Direct Print must be disabled
- P JL device access commands must be disabled
- User names for the LDAP and Windows Sign In users must only contain the characters defined in `P.USERNAME.CHARACTER_SET`
- Remote Control-Panel use is disallowed per `P.REMOTE_PANEL.DISALLOWED`
- Local Device Sign In accounts must not be created (i.e., only the Device Administrator account is allowed as a Local Device Sign In account).
- Access must be blocked to the following Web Services (WS):
 - Open Extensibility Platform device (OXPd) Web Services
 - WS* Web Services
- Fax polling receive must be disabled
- User Access Codes use is disabled
- An IPv4 address must be statically assigned as per the instructions in TOE's configuration guidance [CCECG]

1.5.5 Security policy model

This section describes the security policy model for the TOE. Much of the terminology in this section comes from [PP2600.1] and is duplicated here so that readers won't have to read [PP2600.1] to understand the terminology used in the rest of this Security Target document.

1.5.5.1 Subjects/Users

Users are entities that are external to the TOE and which interact with the TOE. TOE users are defined in Table 4.

Designation	Definition
U.USER	Any authorized User. Authorized Users are U.ADMINISTRATOR and U.NORMAL.

Designation	Definition	
	Designation	Definition
	U.NORMAL	A User who is authorized to perform User Document Data processing functions of the TOE.
	U.ADMINISTRATOR	A User who has been specifically granted the authority to manage some portion or all of the TOE and whose actions may affect the TOE security policy (TSP). A password must be set for all U.ADMINISTRATOR accounts in the evaluated configuration.

Table 4: Users

For the purpose of clarity in this Security Target, the following distinctions are made:

- **Control Panel users** – U.NORMAL and U.ADMINISTRATOR users who physically access the TOE's Control Panel.
 - **Security attributes:** User Role (defined by Permission Set) and User Identifier
- **Incoming analog fax phone line users** – Unauthenticated entities that initiate and transmit faxes to the TOE over the TOE's analog fax phone line connection. These users are considered U.ADMINISTRATOR because User Document Data (i.e., incoming faxes) created by these users is considered to be owned by U.ADMINISTRATOR. There are no actual management / administrative functions available to these users.
 - **Security attributes:** None
- **IPsec users:**
 - **Network Client Computers** – Computers (U.NORMAL entities) that can successfully authenticate to the TOE's PJI Interface (TCP port 9100) using IPsec and mutual authentication. The TOE will accept print jobs from any user of a client computer where the client computer has successfully authenticated with the TOE.
 - **Security attributes:** User Role (defined by IPsec/Firewall service template) and User Identifier (defined by IP address)
 - **Administrative Computers** – Computers (U.ADMINISTRATOR entities) that can successfully authenticate to the TOE's administrative interfaces (e.g., EWS/HTTP, SNMP) using IPsec and mutual authentication. An Administrative Computer may also connect to the TOE as a Network Client Computer (i.e., the Administrative Computer can send print jobs as a U.NORMAL user through the PJI Interface on port 9100).
 - **Security attributes:** User Role (defined by IPsec/Firewall service template) and User Identifier (defined by IP address)

1.5.5.2 Objects

Objects are passive entities in the TOE that contain or receive information, and upon which Subjects perform Operations. Objects are equivalent to TOE Assets. There are three types of Objects:

- User Data
- TSF Data
- Functions

1.5.5.2.1 User Data

User Data are data created by and for Users and do not affect the operation of the TOE Security Functionality (TSF). This type of data is comprised of two objects:

- User Document Data
- User Function Data

Designation	Definition
D.DOC	User Document Data consists of the information contained in a user's document. This includes the original document itself in hardcopy or electronic form, image data, or residually-stored data created by the HCD while processing an original document and printed hardcopy output.
D.FUNC	User Function Data are the information about a user's document or job to be processed by the TOE.

Table 5: User Data

User Data objects include:

- **Fax jobs:**
 - **Receive Fax jobs** – Fax jobs received by the TOE over the analog fax phone line where the connection is initiated by another fax device.
 - **Send Fax Jobs** – Fax jobs being sent by the TOE over the analog fax phone line. (The Send Fax functionality is available in the evaluated configuration, but the PC Fax Send feature is disabled in the evaluated configuration.)
- **Print job types that use Job Storage:**
 - **Personal jobs** – Print jobs from a client computer that are stored in Job Storage. In the evaluated configuration, such jobs must be PIN protected with a Job PIN. These jobs are held until the user logs in to the Control Panel and releases the job. For PIN protected stored jobs, the user must be the job owner or know the Job PIN (or have administrator privileges) in order to delete the job. These jobs are automatically deleted after printing or if the HCD is turned off or after an administrator specified time interval. If the HCD contains the HP High Performance Secure Hard Disk, the administrator can configure the TOE to retain these jobs over a power cycle.
 - **Stored jobs** – Print jobs such as a personnel form, time sheet, or calendar from a client computer that are stored on the TOE and reprinted. In the evaluated configuration, such jobs must be PIN protected with a Job PIN. The administrator can configure the TOE to automatically delete these jobs after a specified time interval. For PIN protected stored jobs, the user must be the job owner or know the Job PIN (or have administrator privileges) in order to delete the job. If the HCD contains an eMMC, these jobs are automatically deleted when the HCD is turned off.
 - **Encrypted stored print jobs** – Print jobs like those described above but that require higher than normal protection (for example, documents containing company or employee confidential information). These jobs will be assigned a password by the submitter when submitted to the TOE. The user must know the password of the job in order to print or delete it. The administrator may delete it without knowing the password. If the HCD contains an eMMC, these jobs are automatically deleted when the HCD is turned off.
- **Scan job types:**

- **Email jobs** – Scan jobs that are scanned directly into an email and sent from the TOE to an SMTP gateway.
- **Save to Network Folder jobs** – Scan jobs that are saved to a remote file system.
- **Save to SharePoint jobs** – Scan jobs that are saved to a SharePoint server.
- **Stored copy jobs** – A copy job that a Control Panel user has stored on the TOE. Stored copy jobs are scanned using the HCD scanner. In the evaluated configuration, users are required to protect Stored Copy jobs with a 4-digit Job PIN. The user must be the job owner, know the Job PIN of the job, or be an administrator in order to delete the job.

A user signed in at the Control Panel will be the owner of any created stored copy job. Ownership of a print job sent from a client computer is defined as the username associated with the job when it is submitted to the TOE. The username is specified outside of the TOE, in the Operational Environment, so it can neither be confirmed nor denied by the TOE.

1.5.5.2.2 TSF Data

TSF Data are data created by and for the TOE and that might affect the operation of the TOE. This type of data is comprised of two components: TSF Protected Data and TSF Confidential Data.

Designation	Definition
D.CONF	TSF Confidential Data are assets for which either disclosure or alteration by a user who is neither an administrator nor the owner of the data would have an effect on the operational security of the TOE.
D.PROT	TSF Protected Data are assets for which alteration by a user who is neither an administrator nor the owner of the data would have an effect on the operational security of the TOE, but for which disclosure is acceptable.

Table 6: TSF Data

The following table lists the TSF Data and the data designations.

TSF Data	D.CONF	D.PROT
Audit records	X	
Cryptographic keys and certificates	X	
Device and network configuration settings (including IPsec/Firewall rules and templates)		X
Job data including Job PINs	X	
PJL protocol excluding the job data and Job PINs		X
Permission Sets		X
System time		X
User and Administrator identification data		X

TSF Data	D.CONF	D.PROT
User and Administrator authentication data	X	

Table 7: TSF Data Listing

1.5.5.3 SFR package functions

Functions perform processing, storage, and transmission of data. The following [PP2600.1]-defined functions apply to this Security Target.

Designation	Definition
F.CPY	Copying: a function in which physical document input is duplicated to physical document output
F.DSR	Document storage and retrieval: a function in which a document is stored during one job and retrieved during one or more subsequent jobs
F.FAX	Faxing: a function in which physical document input is converted to a telephone-based document facsimile (fax) transmission, and a function in which a telephone-based document facsimile (fax) reception is converted to physical document output.
F.PRT	Printing: a function in which electronic document input is converted to physical document output
F.SCN	Scanning: a function in which physical document input is converted to electronic document output
F.SMI	Shared-medium interface: a function that transmits or receives User Data or TSF Data over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple users, such as wired network media and most radio-frequency wireless media

Table 8: SFR package functions

1.5.5.4 SFR package attributes

When a function is performing processing, storage, or transmission of data, the identity of the function is associated with that particular data as a security attribute. The following [PP2600.1]-defined attributes apply to this Security Target.

Designation	Definition
+CPY	Indicates data that is associated with a copy job.
+DSR	Indicates data that is associated with a document storage and retrieval job.
+FAXIN	Indicated data that is associated with an inbound (received) fax job.

Designation	Definition
+FAXOUT	Indicates data that is associated with an outbound (sent) fax job.
+PRT	Indicates data that is associated with a print job.
+SCN	Indicates data that is associated with a scan job.
+SMI	Indicates data that is transmitted or received over a shared-medium interface.

Table 9: SFR package attributes

2 CC Conformance Claim

This Security Target is CC Part 2 extended and CC Part 3 conformant, with a claimed Evaluation Assurance Level of EAL3, augmented by ALC_FLR.2.

This Security Target claims conformance to the following Protection Profiles and PP packages, if any:

- [PP2600.1]: IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A". Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-CPY]: SFR Package for Hardcopy Device Copy Functions. Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-DSR]: SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions. Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-FAX]: SFR Package for Hardcopy Device Fax Functions. Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-PRT]: SFR Package for Hardcopy Device Print Functions. Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-SCN]: SFR Package for Hardcopy Device Scan Functions. Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-SMI]: SFR Package for Hardcopy Device Shared-medium Interface Functions. Version 1.0 as of June 2009; demonstrable conformance.

Common Criteria [CC] version 3.1 revision 5 is the basis for this conformance claim.

2.1 Protection Profile tailoring and additions

2.1.1 IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A" ([PP2600.1])

Although the HCDs in this Security Target contain a nonvolatile mass storage device (i.e., a storage drive), this device is considered an internal, built-in component of the HCDs and, therefore, constitutes a non-removable nonvolatile storage device from the perspective of [PP2600.1]. Because no removable nonvolatile storage devices exist in the HCDs, this Security Target does **not** claim conformance to "2600.1-NVS SFR Package for Hardcopy Device Nonvolatile Storage Functions, Operational Environment A" contained in [PP2600.1].

The following tables provide the mappings of and rationale for how the SFRs in this Security Target map to the SFRs in the protection profile [PP2600.1]. The term "n/a" means "not applicable". The term "common" is used to refer to that portion of [PP2600.1] to which all TOEs must conform (i.e., the portions not labeled as packages).

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FAU_GEN.1	FAU_GEN.1			The ST's FAU_GEN.1 combines the contents of FAU_GEN.1 from the common [PP2600.1] and FAU_GEN.1 from the [PP2600.1] SMI SFR package.

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FAU_GEN.2	FAU_GEN.2			n/a
FDP_ACC.1(a)	FDP_ACC.1-cac			The ST's FDP_ACC.1-cac combines the contents of the FDP_ACC.1(a) from the common [PP2600.1] and the FDP_ACC.1's from the [PP2600.1] packages claimed by the ST. The iteration name was changed from "(a)" to "-cac" (Common Access Control) for better understandability when reading the ST.
FDP_ACC.1(b)	FDP_ACC.1-tfac			The iteration name was changed from "(b)" to "-tfac" (TOE Function Access Control) for better understandability when reading the ST.
FDP_ACF.1(a)	FDP_ACF.1-cac			The ST's FDP_ACF.1-cac combines the contents of the FDP_ACF.1(a) from the common [PP2600.1] and the FDP_ACF.1's from the [PP2600.1] packages claimed by the ST. The iteration name was changed from "(a)" to "-cac" (Common Access Control) for better understandability when reading the ST.
FDP_ACF.1(b)	FDP_ACF.1-tfac			The iteration name was changed from "(b)" to "-tfac" (TOE Function Access Control) for better understandability when reading the ST.
FDP_RIP.1	FDP_RIP.1			n/a
FIA_ATD.1	FIA_ATD.1			n/a
FIA_UAU.1	FIA_UAU.1			The TOE's Control Panel supports authentication (FIA_UAU.1).

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
	FIA_UAU.2		X	The TOE supports IPsec authentication (FIA_UAU.2) which complies with the more restrictive FIA_UAU.2.
FIA_UID.1	FIA_UID.1			The TOE's Control Panel supports identification (FIA_UID.1).
	FIA_UID.2		X	The TOE supports IPsec identification (FIA_UID.2) which complies with the more restrictive FIA_UID.2.
FIA_USB.1	FIA_USB.1			n/a
FMT_MSA.1(a)	FMT_MSA.1			FMT_MSA.1(a) was omitted because management of all security attributes can be covered by FMT_MSA.1.
FMT_MSA.1(b)	FMT_MSA.1			FMT_MSA.1(a) was omitted because management of all security attributes can be covered by FMT_MSA.1.
FMT_MSA.3(a)	None			FMT_MSA.3(a) was omitted because the security attributes do not have default values in the evaluated configuration.
FMT_MSA.3(b)	None			FMT_MSA.3(b) was omitted because the security attributes do not have default values in the evaluated configuration.
FMT_MTD.1.1(a)	FMT_MTD.1			Iteration was omitted because only TSF Data that is not associated with a Normal User can be managed.
FMT_MTD.1.1(b)	None			Iteration was omitted because only TSF Data that is not associated with a Normal User can be managed.

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FMT_SMF.1	FMT_SMF.1			n/a
FMT_SMR.1	FMT_SMR.1			n/a
FPT_STM.1	FPT_STM.1			Because the TOE is configured to use NTP along with its internal time source, both A.SERVICES.RELIABLE and OE.SERVICES.RELIABLE apply.
FPT_TST.1	FPT_TST.1			n/a
FTA_SSL.3	FTA_SSL.3			n/a

Table 10: SFR mappings between 2600.1 and the ST

These SFRs in the Security Target are not required by and do not map to the protection profile [PP2600.1].

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
None	FCS_CKM.1-ipsec	X		FCS_CKM.1-ipsec specifies the type of keys generated for IPsec key establishment.
None	FCS_CKM.1-job	X		FCS_CKM.1-job specifies key derivation function used by the TOE to unlock an encrypted stored print job.
None	FCS_CKM.2			FCS_CKM.2 specifies the cryptographic key establishment methods used by the TOE in IKEv1 and IKEv2 in IPsec.
None	FCS_COP.1-ipsec	X		FCS_COP.1-ipsec specifies the RSA signature generation and verification along with the AES and HMAC cryptographic algorithms used by IPsec.
None	FCS_COP.1-job	X		FCS_COP.1-job specifies the AES decryption algorithm used by the TOE for decrypting encrypted stored print jobs.

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
None	FIA_AFL.1			The TOE locks the Local Administrator account (a.k.a. Device Administrator account) after an administrator configurable positive integer of unsuccessful Control Panel authentication attempts via Local Device Sign In method. Recommended by [PP2600.1] APPLICATION NOTE 38.
None	FIA_SOS.1			FIA_SOS.1 specifies the Job PIN strength of certain authorization mechanisms used by the TOE.
None	FIA_UAU.7			The TOE masks Job PINs, Access Codes, and passwords. Recommended by [PP2600.1] APPLICATION NOTE 38.
None	FMT_MOF.1	X		The TOE allows administrators to manage the security functions Control Panel Full Authentication, Control Panel authorization, Windows Sign In, LDAP Sign In, account lockout for Local Administrator account (a.k.a. Device Administrator account), Inactivity Timeout for Control Panel user sign-in sessions, enhanced security event logging, and IPsec.
None	FCS_RBG_EXT.1			FCS_RBG_EXT.1 specifies the random bit generation used by IPsec.

Table 11: SFR mappings of non-PP2600.1 SFRs and the ST (in the ST, but not required by or hierarchical to SFRs in PP2600.1)

2.1.2 SFR Package for Hardcopy Device Copy Functions ([PP2600.1-CPY])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-CPY] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1	FDP_ACC.1-cac	X		See rationale for FDP_ACC.1(a).

[PP2600.1-CPY] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACF.1	FDP_ACF.1-cac	X		See rationale for FDP_ACF.1(a).

Table 12: SFR mappings between 2600.1-CPY and the ST

2.1.3 SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions ([PP2600.1-DSR])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-DSR] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1	FDP_ACC.1-cac	X		See rationale for FDP_ACC.1(a).
FDP_ACF.1	FDP_ACF.1-cac	X		See rationale for FDP_ACF.1(a).

Table 13: SFR mappings between 2600.1-DSR and the ST

2.1.4 SFR Package for Hardcopy Device Fax Functions ([PP2600.1-FAX])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-FAX] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1	FDP_ACC.1-cac	X		See rationale for FDP_ACC.1(a).
FDP_ACF.1	FDP_ACF.1-cac	X		See rationale for FDP_ACF.1(a).

Table 14: SFR mapping between 2600.1-FAX and the ST

2.1.5 SFR Package for Hardcopy Device Print Functions ([PP2600.1-PRT])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-PRT] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1	FDP_ACC.1-cac	X		See rationale for FDP_ACC.1(a).
FDP_ACF.1	FDP_ACF.1-cac	X		See rationale for FDP_ACF.1(a).

Table 15: SFR mappings between 2600.1-PRT and the ST

2.1.6 SFR Package for Hardcopy Device Scan Functions ([PP2600.1-SCN])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-SCN] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1	FDP_ACC.1-cac	X		See rationale for FDP_ACC.1(a).
FDP_ACF.1	FDP_ACF.1-cac	X		See rationale for FDP_ACF.1(a).

Table 16: SFR mappings between 2600.1-SCN and the ST

2.1.7 SFR Package for Hardcopy Device Shared-medium Interface Functions ([PP2600.1-SMI])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-SMI] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FAU_GEN.1	FAU_GEN.1			The ST's FAU_GEN.1 combines the contents of FAU_GEN.1 from the common [PP2600.1] and FAU_GEN.1 from the [PP2600.1] SMI SFR package.
FPT_FDI_EXP.1	FPT_FDI_EXP.1			n/a
FTP_ITC.1	FTP_ITC.1			n/a

Table 17: SFR mappings between 2600.1-SMI and the ST

3 Security Problem Definition

3.1 Introduction

The statement of TOE security environment describes the security aspects of the environment in which the TOE is intended to be used and the manner in which it is expected to be deployed.

To this end, the statement of TOE security environment identifies the list of assumptions made on the Operational Environment (including physical and procedural measures) and the intended method of use of the product, defines the threats that the product is designed to counter, and the organizational security policies with which the product is designed to comply.

3.2 Threat Environment

This security problem definition addresses threats posed by four categories of threat agents:

- a) Persons who are not permitted to use the TOE who may attempt to use the TOE.
- b) Persons who are authorized to use the TOE who may attempt to use TOE functions for which they are not authorized.
- c) Persons who are authorized to use the TOE who may attempt to access data in ways for which they not authorized.
- d) Persons who unintentionally cause a software malfunction that may expose the TOE to unanticipated threats.

The threats and policies defined in this Security Target address the threats posed by these threat agents.

The threat agents are assumed to originate from a well-managed user community in a non-hostile working environment. Therefore, the product protects against threats of security vulnerabilities that might be exploited in the intended environment for the TOE with low level of expertise and effort. The TOE protects against straightforward or intentional breach of TOE security by attackers possessing a Basic attack potential.

3.2.1 Threats countered by the TOE

T.DOC.DIS

User Document Data may be disclosed to unauthorized persons.

T.DOC.ALT

User Document Data may be altered by unauthorized persons.

T.FUNC.ALT

User Function Data may be altered by unauthorized persons.

T.PROT.ALT

TSF Protected Data may be altered by unauthorized persons.

T.CONF.DIS

TSF Confidential Data may be disclosed to unauthorized persons.

T.CONF.ALT

TSF Confidential Data may be altered by unauthorized persons.

3.3 Assumptions

3.3.1 Environment of use of the TOE

3.3.1.1 Physical

A.ACCESS.MANAGED

The TOE is located in a restricted or monitored environment that provides protection from unmanaged access to the physical components and data interfaces of the TOE.

A.ADMIN.PC.SECURE

The administrative computer is in a physically secured and managed environment and only the authorized administrator has access to it.

A.USER.PC.POLICY

User computers are configured and used in conformance with the organization's security policies.

3.3.1.2 Personnel

A.USER.TRAINING

TOE Users are aware of the security policies and procedures of their organization, and are trained and competent to follow those policies and procedures.

A.ADMIN.TRAINING

Administrators are aware of the security policies and procedures of their organization, are trained and competent to follow the manufacturer's guidance and documentation, and correctly configure and operate the TOE in accordance with those policies and procedures.

A.ADMIN.TRUST

Administrators do not use their privileged access rights for malicious purposes.

3.3.1.3 Connectivity

A.SERVICES.RELIABLE

When the TOE uses any of the network services SMB, FTP, DNS, Kerberos, LDAP, NTP, SMTP, SharePoint, syslog, and/or WINS, these services provide reliable information and responses to the TOE.

A.EMAILS.PROTECTED

For emails received by the SMTP gateway from the TOE, the transmission of emails between the SMTP gateway and the email's destination is protected.

3.4 Organizational Security Policies

3.4.1 Included in the PP2600.1 protection profile

P.USER.AUTHORIZATION

To preserve operational accountability and security, Users will be authorized to use the TOE only as permitted by the TOE Owner.

P.SOFTWARE.VERIFICATION

To detect corruption of the executable code in the TSF, procedures will exist to self-verify executable code in the TSF.

P.AUDIT.LOGGING

To preserve operational accountability and security, records that provide an audit trail of TOE use and security-relevant events will be created, maintained, and protected from unauthorized disclosure or alteration, and will be reviewed by authorized personnel.

P.INTERFACE.MANAGEMENT

To prevent unauthorized use of the external interfaces of the TOE, operation of those interfaces will be controlled by the TOE and its IT environment.

3.4.2 In addition to the PP2600.1 protection profile

P.ADMIN.PASSWORD

To restrict access to administrative tasks, the Device Administrator Password will be set in the evaluated configuration so that it is required to perform security-relevant actions through the EWS and at the Control Panel.

P.USERNAME.CHARACTER_SET

To prevent ambiguous user names in the TOE's audit trail, the user names of the LDAP and Windows Sign In users must only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E).

P.REMOTE_PANEL.DISALLOWED

To preserve operational accountability and security, administrators must not use the Remote Control-Panel feature.

4 Security Objectives

4.1 Objectives for the TOE

O.AUDIT.LOGGED

The TOE shall create and maintain a log of TOE use and security-relevant events, and prevent its unauthorized disclosure or alteration.

O.CONF.NO_ALT

The TOE shall protect TSF Confidential Data from unauthorized alteration.

O.CONF.NO_DIS

The TOE shall protect TSF Confidential Data from unauthorized disclosure.

O.DOC.NO_ALT

The TOE shall protect User Document Data from unauthorized alteration.

O.DOC.NO_DIS

The TOE shall protect User Document Data from unauthorized disclosure.

O.FUNC.NO_ALT

The TOE shall protect User Function Data from unauthorized alteration.

O.INTERFACE.MANAGED

The TOE shall manage the operation of external interfaces in accordance with security policies.

O.PROT.NO_ALT

The TOE shall protect TSF Protected Data from unauthorized alteration.

O.SOFTWARE.VERIFIED

The TOE shall provide procedures to self-verify executable code in the TSF.

O.USER.AUTHORIZED

The TOE shall require identification and authentication of Users, and shall ensure that Users are authorized in accordance with security policies before allowing them to use the TOE.

4.2 Objectives for the Operational Environment

OE.ADMIN.PC.SECURE

The TOE Owner shall locate the Administrative Computer in a physically secured and managed environment and allow only authorized personnel access to it.

OE.ADMIN.TRAINED

The TOE Owner shall ensure that TOE Administrators are aware of the security policies and procedures of their organization; have the training, competence, and time to follow the manufacturer's guidance and documentation; and correctly configure and operate the TOE in accordance with those policies and procedures.

OE.ADMIN.TRUSTED

The TOE Owner shall establish trust that TOE Administrators will not use their privileged access rights for malicious purposes.

OE.AUDIT.REVIEWED

The TOE Owner shall ensure that audit logs are reviewed at appropriate intervals for security violations or unusual patterns of activity.

OE.AUDIT_ACCESS.AUTHORIZED

If audit records generated by the TOE are exported from the TOE to another trusted IT product, the TOE Owner shall ensure that those records can be accessed in order to detect potential security violations, and only by authorized persons.

OE.AUDIT_STORAGE.PROTECTED

If audit records are exported from the TOE to another trusted IT product, the TOE Owner shall ensure that those records are protected from unauthorized access, deletion and modifications.

OE.INTERFACE.MANAGED

The IT environment shall provide protection from unmanaged access to TOE external interfaces.

OE.PHYSICAL.MANAGED

The TOE shall be placed in a secure or monitored area that provides protection from unmanaged physical access to the TOE.

OE.SERVICES.RELIABLE

When the TOE uses any of the network services SMB, FTP, DNS, Kerberos, LDAP, NTP, SMTP, SharePoint, syslog, and/or WINS, these services shall provide reliable information and responses to the TOE.

OE.USER.AUTHORIZED

The TOE Owner shall grant permission to Users to be authorized to use the TOE according to the security policies and procedures of their organization.

OE.USER.PC.POLICY

The TOE Owner shall create a set of security policies to which user computers will conform.

OE.USER.TRAINED

The TOE Owner shall ensure that Users are aware of the security policies and procedures of their organization, and have the training and competence to follow those policies and procedures.

OE.USERNAME.CHARACTER_SET

The user names of all LDAP and Windows Sign In method users shall only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E).

OE.EMAILS.PROTECTED

The IT environment shall protect the transmission of emails from the SMTP gateway to the email's destination.

4.3 Security Objectives Rationale

4.3.1 Coverage

The following table provides a mapping of TOE objectives to threats and policies, showing that each objective counters or enforces at least one threat or policy, respectively.

Objective	Threats / OSPs
O.AUDIT.LOGGED	P.AUDIT.LOGGING

Objective	Threats / OSPs
O.CONF.NO_ALT	T.CONF.ALT
O.CONF.NO_DIS	T.CONF.DIS
O.DOC.NO_ALT	T.DOC.ALT
O.DOC.NO_DIS	T.DOC.DIS
O.FUNC.NO_ALT	T.FUNC.ALT
O.INTERFACE.MANAGED	P.INTERFACE.MANAGEMENT
O.PROT.NO_ALT	T.PROT.ALT
O.SOFTWARE.VERIFIED	P.SOFTWARE.VERIFICATION
O.USER.AUTHORIZED	T.DOC.DIS T.DOC.ALT T.FUNC.ALT T.PROT.ALT T.CONF.DIS T.CONF.ALT P.USER.AUTHORIZATION

Table 18: Mapping of security objectives to threats and policies

The following table provides a mapping of the objectives for the Operational Environment to assumptions, threats and policies, showing that each objective holds, counters or enforces at least one assumption, threat or policy, respectively.

Objective	Assumptions / Threats / OSPs
OE.ADMIN.PC.SECURE	A.ADMIN.PC.SECURE
OE.ADMIN.TRAINED	A.ADMIN.TRAINING P.ADMIN.PASSWORD P.REMOTE_PANEL.DISALLOWED
OE.ADMIN.TRUSTED	A.ADMIN.TRUST
OE.AUDIT.REVIEWED	P.AUDIT.LOGGING
OE.AUDIT_ACCESS.AUTHORIZED	P.AUDIT.LOGGING
OE.AUDIT_STORAGE.PROTECTED	P.AUDIT.LOGGING
OE.INTERFACE.MANAGED	P.INTERFACE.MANAGEMENT

Objective	Assumptions / Threats / OSPs
OE.PHYSICAL.MANAGED	A.ACCESS.MANAGED
OE.SERVICES.RELIABLE	A.SERVICES.RELIABLE
OE.USER.AUTHORIZED	T.DOC.DIS T.DOC.ALT T.FUNC.ALT T.PROT.ALT T.CONF.DIS T.CONF.ALT P.USER.AUTHORIZATION
OE.USER.PC.POLICY	A.USER.PC.POLICY
OE.USER.TRAINED	A.USER.TRAINING
OE.USERNAME.CHARACTER_SET	P.USERNAME.CHARACTER_SET
OE.EMAILS.PROTECTED	A.EMAILS.PROTECTED

Table 19: Mapping of security objectives for the Operational Environment to assumptions, threats and policies

4.3.2 Sufficiency

The following rationale provides justification that the security objectives are suitable to counter each individual threat and that each security objective tracing back to a threat, when achieved, actually contributes to the removal, diminishing or mitigation of that threat:

Threat	Rationale for security objectives
T.DOC.DIS	<p>The threat:</p> <ul style="list-style-type: none"> User Document Data may be disclosed to unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> O.DOC.NO_DIS which protects D.DOC from unauthorized disclosure. O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.DOC.ALT	<p>The threat:</p> <ul style="list-style-type: none"> User Document Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> O.DOC.NO_ALT which protects D.DOC from unauthorized alteration.

Threat	Rationale for security objectives
	<ul style="list-style-type: none"> • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.FUNC.ALT	<p>The threat:</p> <ul style="list-style-type: none"> • User Function Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.FUNC.NO_ALT which protects D.FUNC from unauthorized alteration. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.PROT.ALT	<p>The threat:</p> <ul style="list-style-type: none"> • TSF Protected Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.PROT.NO_ALT which protects D.PROT from unauthorized alteration. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.CONF.DIS	<p>The threat:</p> <ul style="list-style-type: none"> • TSF Confidential Data may be disclosed to unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.CONF.NO_DIS which protects D.CONF from unauthorized disclosure. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.CONF.ALT	<p>The threat:</p> <ul style="list-style-type: none"> • TSF Confidential Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.CONF.NO_ALT which protects D.CONF from unauthorized alteration. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization.

Threat	Rationale for security objectives
	<ul style="list-style-type: none"> OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.

Table 20: Sufficiency of objectives countering threats

The following rationale provides justification that the security objectives for the environment are suitable to cover each individual assumption, that each security objective for the environment that traces back to an assumption about the environment of use of the TOE, when achieved, actually contributes to the environment achieving consistency with the assumption, and that if all security objectives for the environment that trace back to an assumption are achieved, the intended usage is supported:

Assumption	Rationale for security objectives
A.ACCESS.MANAGED	<p>The assumption:</p> <ul style="list-style-type: none"> The TOE is located in a restricted or monitored environment that provides protection from unmanaged access to the physical components and data interfaces of the TOE. <p>is upheld by:</p> <ul style="list-style-type: none"> OE.PHYSICAL.MANAGED which establishes a protected physical environment for the TOE.
A.ADMIN.PC.SECURE	<p>The assumption:</p> <ul style="list-style-type: none"> The administrative computer is in a physically secured and managed environment and only the authorized administrator has access to it. <p>is upheld by:</p> <ul style="list-style-type: none"> OE.ADMIN.PC.SECURE which establishes the responsibility of the TOE owner to locate the administrative computer in a physically secured and managed environment and allow only authorized personnel access.
A.USER.PC.POLICY	<p>The assumption:</p> <ul style="list-style-type: none"> User computers are configured and used in conformance with the organization's security policies. <p>is upheld by:</p> <ul style="list-style-type: none"> OE.USER.PC.POLICY which establishes the responsibility of the TOE owner to create a set of security policies to which user computers will conform.
A.USER.TRAINING	<p>The assumption:</p> <ul style="list-style-type: none"> TOE Users are aware of the security policies and procedures of their organization, and are trained and competent to follow those policies and procedures. <p>is upheld by:</p>

Assumption	Rationale for security objectives
	<ul style="list-style-type: none"> • OE.USER.TRAINED which establishes responsibility of the TOE Owner to provide appropriate User training.
A.ADMIN.TRAINING	<p>The assumption:</p> <ul style="list-style-type: none"> • Administrators are aware of the security policies and procedures of their organization, are trained and competent to follow the manufacturer's guidance and documentation, and correctly configure and operate the TOE in accordance with those policies and procedures. <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.ADMIN.TRAINED which establishes responsibility of the TOE Owner to provide appropriate Administrator training.
A.ADMIN.TRUST	<p>The assumption:</p> <ul style="list-style-type: none"> • Administrators do not use their privileged access rights for malicious purposes. <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.ADMIN.TRUSTED which establishes responsibility of the TOE Owner to have a trusted relationship with Administrators.
A.SERVICES.RELIABLE	<p>The assumption:</p> <ul style="list-style-type: none"> • When the TOE uses any of the network services SMB, FTP, DNS, Kerberos, LDAP, NTP, SMTP, SharePoint, syslog, and/or WINS, these services provide reliable information and responses to the TOE. <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.SERVICES.RELIABLE which, when the TOE uses the network services SMB, FTP, DNS, Kerberos, LDAP, NTP, SMTP, SharePoint, syslog, and/or WINS, establishes that these services provide reliable information and responses to the TOE.
A.EMAILS.PROTECTED	<p>The assumption:</p> <ul style="list-style-type: none"> • For emails received by the SMTP gateway from the TOE, the transmission of emails between the SMTP gateway and the email's destination is protected. <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.EMAILS.PROTECTED which protects the transmission of emails from the SMTP gateway to the email's destination.

Table 21: Sufficiency of objectives holding assumptions

The following rationale provides justification that the security objectives are suitable to cover each individual organizational security policy, that each security objective that traces back to an OSP, when achieved,

actually contributes to the implementation of the OSP, and that if all security objectives that trace back to an OSP are achieved, the OSP is implemented:

OSP	Rationale for security objectives
P.USER.AUTHORIZATION	<p>The OSP:</p> <ul style="list-style-type: none"> To preserve operational accountability and security, Users will be authorized to use the TOE only as permitted by the TOE Owner. <p>is enforced by:</p> <ul style="list-style-type: none"> O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization to use the TOE. OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
P.SOFTWARE.VERIFICATION	<p>The OSP:</p> <ul style="list-style-type: none"> To detect corruption of the executable code in the TSF, procedures will exist to self-verify executable code in the TSF. <p>is enforced by:</p> <ul style="list-style-type: none"> O.SOFTWARE.VERIFIED which provides procedures to self-verify executable code in the TSF.
P.AUDIT.LOGGING	<p>The OSP:</p> <ul style="list-style-type: none"> To preserve operational accountability and security, records that provide an audit trail of TOE use and security-relevant events will be created, maintained, and protected from unauthorized disclosure or alteration, and will be reviewed by authorized personnel. <p>is enforced by:</p> <ul style="list-style-type: none"> O.AUDIT.LOGGED which creates and maintains a log of TOE use and security-relevant events, and prevents unauthorized disclosure or alteration. OE.AUDIT_STORAGE.PROTECTED which protects exported audit records from unauthorized access, deletion and modifications. OE.AUDIT_ACCESS.AUTHORIZED which establishes responsibility of the TOE Owner to provide appropriate access to exported audit records. OE.AUDIT.REVIEWED which establishes responsibility of the TOE Owner to ensure that audit logs are appropriately reviewed.

OSP	Rationale for security objectives
P.INTERFACE.MANAGEMENT	<p>The OSP:</p> <ul style="list-style-type: none"> To prevent unauthorized use of the external interfaces of the TOE, operation of those interfaces will be controlled by the TOE and its IT environment. <p>is enforced by:</p> <ul style="list-style-type: none"> O.INTERFACE.MANAGED which manages the operation of external interfaces in accordance with security policies. OE.INTERFACE.MANAGED which establishes a protected environment for TOE external interfaces.
P.ADMIN.PASSWORD	<p>The OSP:</p> <ul style="list-style-type: none"> To restrict access to administrative tasks, the Device Administrator Password will be set in the evaluated configuration so that it is required to perform security-relevant actions through EWS (HTTP) and at the Control Panel. <p>is enforced by:</p> <ul style="list-style-type: none"> OE.ADMIN.TRAINED which establishes responsibility of the TOE Owner to provide appropriate Administrator training.
P.USERNAME.CHARACTER_SET	<p>The OSP:</p> <ul style="list-style-type: none"> To prevent ambiguous user names in the TOE's audit trail, the user names of the LDAP and Windows Sign In method users must only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E). <p>is enforced by:</p> <ul style="list-style-type: none"> OE.USERNAME.CHARACTER_SET which establishes that the user names of all LDAP and Windows Sign In methods users shall only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E).

OSP	Rationale for security objectives
P.REMOTE_PANEL.DISALLOWED	<p>The OSP:</p> <ul style="list-style-type: none"> To preserve operational accountability and security, administrators must not use the Remote Control-Panel feature. <p>is enforced by:</p> <ul style="list-style-type: none"> OE.ADMIN_TRAINED which establishes responsibility of the TOE Owner to provide appropriate Administrator training.

Table 22: Sufficiency of objectives enforcing Organizational Security Policies

5 Extended Components Definition

This section contains the extended component definition(s) used by this ST.

5.1 Class FPT: Protection of the TSF

This section describes the functional requirements for the restrictions of forwarding of data to external interfaces. This extended component is defined in [PP2600.1] Section 9.2.

5.1.1 Restricted forwarding of data to external interfaces (FDI)

Family behaviour

This family defines requirements for the TSF to restrict direct forwarding of information from one external interface to another external interface.

Many products receive information on specific external interfaces and are intended to transform and process this information before it is transmitted on another external interface. However, some products may provide the capability for attackers to misuse external interfaces to violate the security of the TOE or devices that are connected to the TOE's external interfaces. Therefore, direct forwarding of unprocessed data between different external interfaces is forbidden unless explicitly allowed by an authorized administrative role. The family FPT_FDI_EXP has been defined to specify this kind of functionality.

Component levelling

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces provides for the functionality to require TSF controlled processing of data received over defined external interfaces before these data are sent out on another external interface. Direct forwarding of data from one external interface to another one requires explicit allowance by an authorized administrative role.

Management: FPT_FDI_EXP.1

There are no management activities foreseen.

Audit: FPT_FDI_EXP.1

There are no audit events foreseen.

5.1.1.1 FPT_FDI_EXP.1 - Restricted forwarding of data to external interfaces

Hierarchical to: No other components.

Dependencies: FMT_SMF.1 Specification of Management Functions
FMT_SMR.1 Security roles

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on [assignment: *list of external interfaces*] from being forwarded without further processing by the TSF to [assignment: *list of external interfaces*].

5.2 Class FCS: Cryptographic support

5.2.1 Cryptographic Operation (Random Bit Generation) (FCS_RBG)

Family behaviour

This family defines requirements for random bit generation to ensure that it is performed in

accordance with selected standards and seeded by an entropy source.

Component levelling

FCS_RBG_EXT.1 Random Bit Generation requires random bit generation to be performed in accordance with selected standards and seeded by an entropy source.

Management: FCS_RBG_EXT.1

There are no management activities foreseen.

Audit: FCS_RBG_EXT.1

There are no audit events foreseen.

5.2.1.1 FCS_RBG_EXT.1 – Random Bit Generation

Hierarchical to: No other components.

Dependencies: No dependencies.

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with NIST SP 800-90A using [selection: **Hash_DRBG(any)**, **HMAC_DRBG(any)**, **CTR_DRBG(AES)**].

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by an entropy source that accumulates entropy from software-based noise sources with a minimum of [selection: **128 bits**, **256 bits**] of entropy at least equal to the greatest security strength, according to NIST SP 800-57, of the keys and hashes that it will generate.

Rationale

Random bits/number will be used by the SFRs for key generation and destruction, and the Common Criteria does not provide a suitable SFR for the random bit generation.

This extended component ensures the strength of encryption keys, and it is therefore placed in the FCS class with a single component.

6 Security Requirements

6.1 TOE Security Functional Requirements

The following table shows the security functional requirements for the TOE, and the operations performed on the components according to CC part 2: iteration (Iter.), refinement (Ref.), assignment (Ass.) and selection (Sel.).

Security functional group	Security functional requirement	Base security functional component	Source	Operations			
				Iter.	Ref.	Ass.	Sel.
FAU - Security audit	FAU_GEN.1 Audit data generation		PP2600.1	No	No	Yes	Yes
	FAU_GEN.2 User identity association		PP2600.1	No	No	No	No
FCS - Cryptographic support	FCS_CKM.1-ipsec Cryptographic key generation	FCS_CKM.1	CC Part 2	Yes	Yes	Yes	No
	FCS_CKM.1-job Cryptographic key generation	FCS_CKM.1	CC Part 2	Yes	No	Yes	No
	FCS_CKM.2 Cryptographic key establishment		CC Part 2	No	Yes	Yes	No
	FCS_COP.1-ipsec Cryptographic operation	FCS_COP.1	CC Part 2	Yes	Yes	Yes	No
	FCS_COP.1-job Cryptographic operation	FCS_COP.1	CC Part 2	Yes	No	Yes	No
	FCS_RBG_EXT.1 Random Bit Generation		ECD	No	Yes	No	Yes
FDP - User data protection	FDP_ACC.1-cac Common access control SFP	FDP_ACC.1	PP2600.1	Yes	No	Yes	No
	FDP_ACC.1-tfac TOE function access control SFP	FDP_ACC.1	PP2600.1	Yes	No	Yes	No
	FDP_ACF.1-cac Common access control functions	FDP_ACF.1	PP2600.1	Yes	No	Yes	No

Security functional group	Security functional requirement	Base security functional component	Source	Operations			
				Iter.	Ref.	Ass.	Sel.
	FDP_ACF.1-tfac TOE function access control functions	FDP_ACF.1	PP2600.1	Yes	No	Yes	No
	FDP_RIP.1 Subset residual information protection		PP2600.1	No	No	Yes	Yes
FIA - Identification and authentication	FIA_AFL.1 Authentication failure handling		CC Part 2	No	No	Yes	Yes
	FIA_ATD.1 Local user attribute definition		PP2600.1	No	No	Yes	No
	FIA_SOS.1 Verification of secrets		CC Part 2	No	No	Yes	No
	FIA_UAU.1 Timing of Control Panel authentication		PP2600.1	No	Yes	Yes	No
	FIA_UAU.2 IPsec authentication before any action		CC Part 2	No	Yes	No	No
	FIA_UAU.7 Control Panel protected authentication feedback		CC Part 2	No	Yes	Yes	No
	FIA_UID.1 Timing of Control Panel identification		PP2600.1	No	Yes	Yes	No
	FIA_UID.2 IPsec identification before any action		CC Part 2	No	Yes	No	No
	FIA_USB.1 User-subject binding		PP2600.1	No	Yes	Yes	No
FMT - Security management	FMT_MOF.1 Management of authentication security functions behavior	FMT_MOF.1	CC Part 2	Yes	No	Yes	Yes

Security functional group	Security functional requirement	Base security functional component	Source	Operations			
				Iter.	Ref.	Ass.	Sel.
	FMT_MSA.1 Management of security attributes	FMT_MSA.1	PP2600.1	Yes	No	Yes	Yes
	FMT_MTD.1 Management of TSF data	FMT_MTD.1	PP2600.1	Yes	No	Yes	Yes
	FMT_SMF.1 Specification of management functions		PP2600.1	No	No	Yes	No
	FMT_SMR.1 Security roles		PP2600.1	No	No	Yes	No
FPT - Protection of the TSF	FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces		PP2600.1-SMI	No	No	Yes	No
	FPT_STM.1 Reliable time stamps		PP2600.1	No	No	No	No
	FPT_TST.1 TSF testing		PP2600.1	No	No	Yes	Yes
FTA - TOE access	FTA_SSL.3 Control Panel TSF-initiated termination		PP2600.1	No	Yes	Yes	No
FTP - Trusted path/channels	FTP_ITC.1 Inter-TSF trusted channel		PP2600.1-SMI	No	Yes	Yes	Yes

Table 23: Security functional requirements for the TOE

6.1.1 Security audit (FAU)

6.1.1.1 Audit data generation (FAU_GEN.1)

FAU_GEN.1.1

The TSF shall be able to generate an audit record of the following auditable events:

- a) Start-up and shutdown of the audit functions; and
- b) All auditable events for the **not specified** level of audit; and
- c) **All Auditable Events as each is defined for its Audit Level (if one is specified) for the Relevant SFR in Table 24: Auditable Events; none.**

FAU_GEN.1.2

The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, **for each Relevant SFR listed in Table 24: Auditable Events: (1) information as defined by its Audit Level (if one is specified), and (2) all Additional Information (if any is required); none.**

Auditable event	Relevant SFR(s)	Audit level	Additional information	[PP2600.1]
Job completion	FDP_ACF.1	Not specified	Type of job	Yes: Common
Both successful and unsuccessful use of the authentication mechanism	FIA_UAU.1, FIA_UAU.2	Basic	None required	Yes: Common
Both successful and unsuccessful use of the identification mechanism	FIA_UID.1, FIA_UID.2	Basic	Attempted user identity, if available	Yes: Common
Use of the management functions	FMT_SMF.1	Minimum	None required	Yes: Common
Modifications to the group of users that are part of a role	FMT_SMR.1	Minimum	None required	Yes: Common
Changes to the time	FPT_STM.1	Minimum	None required	Yes: Common
Failure of the trusted channel functions	FTP_ITC.1	Minimum	None required	Yes: SMI
Termination of an interactive session by the session termination mechanism	FTA_SSL.3	Minimum	None required	No

Table 24: Auditable events

6.1.1.2 User identity association (FAU_GEN.2)

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

6.1.2 Cryptographic support (FCS)

6.1.2.1 Cryptographic key generation (FCS_CKM.1-ipsec)

FCS_CKM.1.1 The *QuickSec cryptographic library in the Operational Environment TSF* shall generate *asymmetric* cryptographic keys in accordance with a specified cryptographic key generation algorithm **defined in Table 25: Asymmetric cryptographic key generation** and specified cryptographic key sizes **defined in Table 25: Asymmetric cryptographic key generation** that meet the following: **the standards defined in Table 25: Asymmetric cryptographic key generation.**

Protocol	Key generation algorithm	Key sizes	Standards
IPsec	DSA	2048-bit, 3072-bit, 4096-bit, 6144-bit, 8192-bit	[FIPS186-2] Finite Field Cryptography (FFC) "Digital Signature Standard (DSS)"

Table 25: Asymmetric cryptographic key generation

Application Note: *Random bit generation for FCS_CKM.1-ipsec is implemented by FCS_RBG_EXT.1.*

Application Note: *The asymmetric keys generated by the DSA algorithm are used by the key establishment algorithms specified in FCS_CKM.2.*

6.1.2.2 Cryptographic key generation (FCS_CKM.1-job)

FCS_CKM.1.1 The TSF shall generate cryptographic keys in accordance with a specific cryptographic key generation algorithm [Password-Based Key Derivation Function 2 (PBKDF2) with HMAC-SHA-256] and specified cryptographic key sizes [256 bit] that meet the following: [PKCS5v2.1]

Application Note: *PBKDF2 is used to derive a key from a Job Encryption Password to unlock an encrypted stored print job.*

6.1.2.3 Cryptographic key establishment (FCS_CKM.2)

FCS_CKM.2.1 The *QuickSec cryptographic library in the Operational Environment TSF* shall perform *cryptographic key establishment* ~~distribute cryptographic keys~~ in accordance with a specified cryptographic key *establishment* ~~distribution~~ method **defined in Table 26: Cryptographic key establishment** that meets the following: **the standards defined in Table 26: Cryptographic key establishment.**

Protocol	Key establishment method	Standards
IPsec	IKEv1 (DH)	[RFC4109] Algorithms for Internet Key Exchange version 1 (IKEv1) [RFC4894] Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec

	IKEv2 (DH)	<p>[RFC4306] Diffie-Hellman key agreement method defined for the IKEv2 protocol; [RFC4718] IKEv2 Clarifications and Implementation Guidelines</p> <p>[RFC4894] Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec</p>
--	------------	--

Table 26: Cryptographic key establishment

6.1.2.4 Cryptographic operation (FCS_COP.1-ipsec)

FCS_COP.1.1 The *QuickSec cryptographic library in the Operational Environment TSE* shall perform the operations defined in **Table 27: Cryptographic operations for IPsec** in accordance with a specified cryptographic algorithm defined in **Table 27: Cryptographic operations for IPsec** and cryptographic key sizes defined in **Table 27: Cryptographic operations for IPsec** that meet the following: the standards defined in **Table 27: Cryptographic operations for IPsec**.

Protocol	Operations	Algorithm	Key sizes (in bits)	Standards	
IPsec	Signature generation and verification	RSA	2048, 3072	[PKCS1v1.5] Public-Key Cryptography Standard (PKCS) #1 v1.5: RSA Encryption Standard	
	Symmetric encryption and decryption	AES	CBC: 128, 192, 256; ECB: 256	[FIPS197] Advanced Encryption Standard; [SP800-38A] Recommendation for Block Cipher Modes of Operation: Methods and Techniques	
	Secure hash	SHA-1, SHA-256, SHA-384, SHA-512			[FIPS180-4] Secure Hash Standard (SHS); [RFC4894] Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec
	Data authentication	HMAC-SHA1-96	160		[RFC2104] HMAC: Keyed-Hashing for Message Authentication; [RFC2404] The Use of HMAC-SHA-1-96 within ESP and AH
		HMAC-SHA-256-128	256		[RFC2104] HMAC: Keyed-Hashing for Message Authentication;
		HMAC-SHA-384-192	384		

		HMAC-SHA-512-256	512	[RFC4868] Using HMAC-SHA-256-, HMAC-SHA-384, and HMAC-SHA-512 with IPsec
--	--	------------------	-----	--

Table 27: Cryptographic operations for IPsec

6.1.2.5 Cryptographic operation (FCS_COP.1-job)

FCS_COP.1.1 The TSF shall perform the operations defined in Table 28: Cryptographic operations in accordance with a specified cryptographic algorithm defined in Table 28: Cryptographic operations and cryptographic key sizes defined in Table 28: Cryptographic operations that meet the following: the standards defined in Table 28: Cryptographic operations.

Protocol	Operations	Algorithm	Key sizes (in bits)	Standards
Print job	Symmetric decryption	AES (CBC mode)	256	[FIPS197] Advanced Encryption Standard; [SP800-38A] Recommendation for Block Cipher Modes of Operation

Table 28: Cryptographic operations

6.1.2.6 Random Bit Generation (FCS_RBG_EXT.1)

FCS_RBG_EXT.1.1 The *QuickSec cryptographic library in the Operational Environment* TSF shall perform all deterministic random bit generation services in accordance with NIST SP 800-90A using **CTR_DRBG(AES)**.

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by an entropy source that accumulates entropy from software-based noise sources with a minimum of **256 bits** of entropy at least equal to the greatest security strength, according to NIST SP 800-57, of the keys and hashes that it will generate.

6.1.3 User data protection (FDP)

6.1.3.1 Common access control SFP (FDP_ACC.1-cac)

FDP_ACC.1.1 The TSF shall enforce the **Common Access Control SFP** in Table 29: Common Access Control SFP on the list of users as subjects, objects, and operations among subjects and objects covered by the Common Access Control SFP in Table 29: Common Access Control SFP.

Object	Operation(s)	Subject	Access control rules	[PP2600.1] section
D.FUNC	Modify, Delete	U.NORMAL	<p>For stored print and stored copy jobs in Job Storage with the Job PIN attribute set: From the Control Panel, subjects must be the job owner or know the Job PIN or have the appropriate Job Storage permission in their Permission Set to delete the job; otherwise, delete access is denied. D.FUNC for Stored Jobs cannot be modified by any user, including U.ADMINISTRATOR.</p> <p>For encrypted stored print jobs in Job Storage: From the Control Panel, subjects must know the job's Job Encryption Password or have the appropriate Job Storage permission in their Permission Set to delete D.FUNC; otherwise, delete access is denied.</p> <p>For Receive Fax jobs in Job Storage: Subjects must have the appropriate permission in their Permission Set to delete D.FUNC; otherwise, delete access is denied. Modify access is denied to all subjects.</p>	Common
D.DOC	Delete	U.NORMAL	<p>For stored print and stored copy jobs in Job Storage with the Job PIN attribute set: From the Control Panel, subjects must be the job owner or know the Job PIN or have the appropriate Job Storage permission in their Permission Set to delete the job; otherwise, delete access is denied.</p> <p>For encrypted stored print jobs in Job Storage: From the Control Panel, subjects must know the job's Job Encryption Password or have the appropriate Job Storage permission in their Permission Set to delete D.DOC; otherwise, delete access is denied.</p> <p>For Receive Fax jobs in Job Storage: From the Control Panel, subjects must have the appropriate permission in their Permission Set to delete the objects; otherwise, delete access is denied. By default, U.NORMAL users do not have the appropriate permission. (Network access is not possible.)</p>	Common

D.DOC+DSR D.DOC+SCN	Read	U.NORMAL	<p>Scan jobs are not stored in Job Storage while the scan is in progress, but in temporary storage not accessible to any other user. The user scanning the document specifies its disposition (e.g. network folder, email, job storage) at the time of the scan and the scan job becomes the job type appropriate for the requested disposition upon completion of the scan.</p> <p>For stored copy jobs in Job Storage with the Job PIN attribute set: Subjects must be the job owner or know the Job PIN to read the object; otherwise, read access is denied.</p>	DSR, SCN
D.DOC+DSR D.DOC+PRT	Read	U.NORMAL	<p>For stored print jobs in Job Storage with the Job PIN attribute set: Subjects must be the job owner or know the Job PIN to read the object; otherwise, read access is denied.</p> <p>For encrypted stored print jobs in Job Storage: Subjects must know the job's Job Encryption Password to read the object, otherwise, read access is denied.</p>	DSR, PRT
D.DOC+DSR D.DOC+FAXIN D.DOC+FAXOUT	Read	U.NORMAL	<p>(D.DOC+FAXIN+DSR) For Receive Fax jobs in Job Storage: Subjects must have the appropriate permission in their Permission Set to read the objects; otherwise, read access is denied.</p> <p>(D.DOC+FAXOUT) Send Fax jobs cannot be read by any subject.</p>	DSR, FAX
D.DOC+CPY	Read, Modify	U.NORMAL	There are no access control restrictions for read and modify access.	CPY

Table 29: Common Access Control SFP

6.1.3.2 TOE function access control SFP (FDP_ACC.1-tfac)

FDP_ACC.1.1 The TSF shall enforce the **TOE Function Access Control SFP** on **users as subjects, TOE functions as objects, and the right to use the functions as operations.**

6.1.3.3 Common access control functions (FDP_ACF.1-cac)

FDP_ACF.1.1 The TSF shall enforce the **Common Access Control SFP** in **Table 29: Common Access Control SFP** to objects based on the following: **the list of users as subjects and objects controlled under the Common Access Control SFP in Table 29: Common Access Control SFP, and for each, the indicated security attributes in Table 29: Common Access Control SFP .**

FDP_ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: **rules specified in the Common Access Control SFP in Table 29: Common Access Control SFP governing access among controlled users as subjects and controlled objects using controlled operations on controlled objects.**

FDP_ACF.1.3 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules:

- **U.ADMINISTRATOR can delete any D.DOC without providing a Job PIN or Job Encryption Password.**

FDP_ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional rules: **none.**

6.1.3.4 TOE function access control functions (FDP_ACF.1-tfac)

FDP_ACF.1.1 The TSF shall enforce the **TOE Function Access Control SFP** to objects based on the following: **users and the following TOE functions and security attributes:**

- **Users: Control Panel users;**
Functions: F.CPY, F.DSR, F.FAX, F.PRT, F.SCN, F.SMI;
Security attributes:
 - **User Role as defined by the user's Permission Set**
 - **Association of a sign in method to a Control Panel application**
- **Users: Network Client Computers, Administrative Computer;**
Functions: F.DSR, F.PRT, F.SMI;
Security attributes:
 - **User Role as defined by the user's IPsec/Firewall service templates.**

Application Note: *The " Allow users to choose alternate sign-in methods at the product control panel" function affects the sign in processing behavior of Control Panel users, but is considered a function instead of a security attribute and, thus, not listed under "security attributes" above.*

FDP_ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:

- **The user is explicitly authorized by U.ADMINISTRATOR to use a function**
- **A Network Client Computer that is authorized to use the TOE is automatically authorized to use the functions F.DSR, F.PRT, F.SMI.**

FDP_ACF.1.3 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: **the user acts in the role U.ADMINISTRATOR, none.**

FDP_ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional rules: **none.**

6.1.3.5 Subset residual information protection (FDP_RIP.1)

FDP_RIP.1.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the **deallocation of the resource from** the following objects: **D.DOC.**

6.1.4 Identification and authentication (FIA)

6.1.4.1 Local Device sign in authentication failure handling (FIA_AFL.1)

FIA_AFL.1.1 The TSF shall detect when **an administrator configurable positive integer within 3 to 10** unsuccessful authentication attempts occur related to **the last successful authentication for the indicated user identity for the following interfaces**

- **Control Panel**
 - **Local Device Sign In**

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been **met**, the TSF shall **lock the account.**

Application Note: *Multiple unsuccessful authentication attempts using the same authentication data are counted as just one unsuccessful authentication attempt by the sign in method.*

6.1.4.2 Local user attribute definition (FIA_ATD.1)

FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users:

- **Control Panel users:**
 - **Local Device Sign In (Local Administrator account only)**
 - **User Identifier: Display name**
 - **User Role: Permission set**
 - **Windows Sign In**
 - **User Role: Permission set**
 - **LDAP Sign In**
 - **User Role: Permission set**
- **IPsec users:**
 - **User Identifier: IP address**
 - **User Role: IPsec/Firewall service template**

Application Note: *The LDAP and Windows Sign In method security attributes belonging to individual users are not in FIA_ATD.1 because these attributes are "maintained" independently by the LDAP server and Windows domain controller, respectively, which are part of the Operational Environment.*

6.1.4.3 Verification of secrets (FIA_SOS.1)

FIA_SOS.1.1 The TSF shall provide a mechanism to verify that secrets meet **the requirement: Job PINs shall be 4 digits.**

6.1.4.4 Timing of Control Panel authentication (FIA_UAU.1)

FIA_UAU.1.1 The TSF shall allow

- Viewing of help information
- Viewing of device status information
- Viewing of network connectivity status information
- Viewing of system time
- Viewing of Web Services status information
- Viewing of Welcome screen
- Selection of Sign In
- Selection of sign-in method from Sign In screen
- Selection of an application
- Printing of help information
- Printing of network connectivity status information
- Changing language for the session
- Resetting of session

on behalf of the *Control Panel* user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each *Control Panel* user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

6.1.4.5 IPsec authentication before any action (FIA_UAU.2)

FIA_UAU.2.1 The TSF shall require each *Network Client Computer, Administrative Computer, and trusted IT product connection user* to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that *connection user*.

6.1.4.6 Control Panel protected authentication feedback (FIA_UAU.7)

FIA_UAU.7.1 The TSF shall provide only *dots ("●")* to users while the *Control Panel* authentication is in progress.

Application Note: *Job PINs and Job Encryption Passwords are not used for authentication, but the digits are masked within dots ("●") when entered.*

6.1.4.7 Timing of Control Panel identification (FIA_UID.1)

FIA_UID.1.1 The TSF shall allow

- Viewing of help information
- Viewing of device status information
- Viewing of network connectivity status information
- Viewing of system time
- Viewing of Web Services status information
- Viewing of Welcome screen
- Selection of Sign In
- Selection of sign-in method from Sign In screen
- Selection of an application
- Printing of help information
- Printing of network connectivity status information
- Changing language for the session
- Resetting of session

on behalf of the *Control Panel* user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each *Control Panel* user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

6.1.4.8 IPsec identification before any action (FIA_UID.2)

FIA_UID.2.1 The TSF shall require each *Network Client Computer, Administrative Computer, and trusted IT product connection user* to be successfully identified before allowing any other TSF-mediated actions on behalf of that *connection user*.

6.1.4.9 User-subject binding (FIA_USB.1)

FIA_USB.1.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user:

1. User Identifier

- **Control Panel users:**
 - **Local Device Sign In: Display name**
 - **Windows Sign In: Windows username**
 - **LDAP Sign In: LDAP username**
- **IPsec users:**
 - **IP address**

2. User Role

- **Control Panel users:**
 - **Local Device Sign In: Permission set**
 - **Windows Sign In: Permission set**
 - **LDAP Sign In: Permission set**
- **IPsec users:**
 - **IPsec/Firewall service template**

Application Note: *Incoming analog fax phone line users have no security attributes, but Receive Fax jobs are owned by U.ADMINISTRATOR.*

FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on behalf of users:

- **If "Allow users to choose alternate sign-in methods at the product control panel" is disabled, the Control Panel user's session Permission Set will be reduced to exclude the permissions of applications whose sign-in method does not match the sign-in method used by the user to sign in.**

FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes associated with the subjects acting on the behalf of users:

- **None**

6.1.5 Security management (FMT)

6.1.5.1 Management of security functions (FMT_MOF.1)

FMT_MOF.1.1 The TSF shall restrict the ability to **perform the actions defined in Table 30** on the functions **defined in Table 30** to **U.ADMINISTRATOR**.

Function(s)	Actions(s)	Application note
Control Panel user authorization	determine the behavior of, modify the behavior of	The "Allow users to choose alternate sign-in methods at the product control panel" function affects how the TOE authorizes control panel users. When this function is enabled, the sign-in method to application mappings are enforced during control panel user authorization.
Windows Sign In	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, at least one external authentication mechanism must be enabled.
LDAP Sign In	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, at least one external authentication mechanism must be enabled.

Account lockout for Local Administrator account	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, account lockout for the Local Administrator account must be enabled.
Inactivity Timeout for Control Panel user sign-in sessions	determine the behavior of, modify the behavior of	<none>
Enhanced security event logging	disable, enable	In the evaluated configuration, enhanced security event logging must be enabled.
IPsec	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, IPsec must be enabled.

Table 30: Management of functions

6.1.5.2 Management of security attributes (FMT_MSA.1)

FMT_MSA.1.1

The TSF shall enforce the **Common Access Control SFP in Table 29** and **TOE Function Access Control SFP** to restrict the ability to **perform the operations defined in Table 31** on the security attributes **defined in Table 31** to **U.ADMINISTRATOR**.

Security attributes(s)	Operation(s)	Application note
User Identifier		
Custom IPsec/Firewall address template	query, create, modify, delete	The TOE provides the capability to create custom IPsec/Firewall address templates. A custom IPsec/Firewall address template defines one or more IP addresses for which the address template is to apply.
Role		
Built-in Device Administrator permission set	query	The TOE contains a built-in Device Administrator permission set that cannot be renamed or deleted. In the evaluated configuration, U.ADMINISTRATOR users must be granted the Device Administrator permission set.
Built-in Device User permission set	query	The TOE contains a built-in Device User permission set that cannot be renamed or deleted. In the evaluated configuration, U.NORMAL users must be granted either the built-in Device User permission set or a custom permission set (if any exist).

Custom permission set	query, create, modify, delete	<p>The TOE provides the capability to create custom permission sets. A custom permission set can be renamed or deleted.</p> <p>In the evaluated configuration, U.NORMAL users must be granted either the built-in Device User permission set or a custom permission set (if any exist).</p>
Permissions associated with built-in Device Administrator permission set	query	<p>The built-in Device Administrator permission set has all permissions enabled. The permissions associated with the Device Administrator permission set cannot be disabled.</p>
Permissions associated with built-in Device User permission set	query, enable, disable	<p>The permissions associated with the built-in Device User permission set can be enabled or disabled.</p> <p>In the evaluated configuration, the built-in Device User permission set must have all administrative permissions disabled.</p>
Permissions associated with a custom permission set	query, enable, disable	<p>The permissions associated with a custom permission set can be enabled or disabled.</p> <p>In the evaluated configuration, any custom permission sets created must have all administrative permissions disabled.</p>
Built-in IPsec/Firewall All Services template	query	<p>The TOE contains a built-in IPsec/Firewall All Services template. The built-in IPsec/Firewall All Services template cannot be renamed or deleted.</p> <p>In the evaluated configuration, built-in IPsec/Firewall All Services template must be granted to the Administrative Computer (U.ADMINISTRATOR).</p>
Custom IPsec/Firewall service template	query, create, delete, modify	<p>The TOE provides the capability to create custom IPsec/Firewall service templates.</p> <p>In the evaluated configuration, two custom IPsec/Firewall service templates must be created:</p> <ul style="list-style-type: none"> • One custom IPsec/Firewall service template for Network Client Computers (U.NORMAL). • One custom IPsec/Firewall service template for trusted IT products.
Network services associated with built-in IPsec/Firewall All Services template	query	<p>The built-in IPsec/Firewall All Services template has all network services enabled. Network services associated with the built-in IPsec/Firewall All Services template cannot be disabled.</p>

	Network services associated with a custom IPsec/Firewall services template	query, enable, disable	<p>Network services associated with a custom IPsec/Firewall services template can be enabled or disabled.</p> <p>In the evaluated configuration;</p> <ul style="list-style-type: none"> • The custom IPsec/Firewall service template for Network Client Computers (U.NORMAL) must only have the P9100 services enabled. • The custom IPsec/Firewall service template for trusted IT products must only have those network services (e.g. SMTP) required for the TOE to establish an IPsec connection with the trusted IT products to either send data to them or request data from them. The custom IPsec/Firewall service template must not contain any network services that allow trusted IT products to initiate a connection to the TOE.
--	--	------------------------	---

Table 31: Management of security attributes

6.1.5.3 Management of TSF data (FMT_MTD.1)

FMT_MTD.1.1

The TSF shall restrict the ability to **perform the operations defined in Table 32 on the TSF Data defined in Table 32 to U.ADMINISTRATOR.**

TSF Data	Operation(s)	Application note
Device Administrator Password	query, set, modify, clear	<p>In the evaluated configuration, the Device Administrator Password must be set.</p> <p>The query operation reads the status (set or not set) of the Device Administrator Password and not the value of the Device Administrator Password.</p>
CA certificates	query, install, delete, export	<none>
Identity certificates	query, install, delete, export	<p>In the evaluated configuration, an identity certificate with private key that is generated outside the TOE must be imported into the TOE's certificate store.</p> <p>The query operation does not allow reading of the private key associated with an identity certificate.</p>

		If the private key associated with an identity certificate is marked as non-exportable, the export operation will export an identity certificate without its associated private key.
Network identity certificate	query, modify	The query operation does not allow reading of the private key associated with the network identity certificate.

Table 32: Management of TSF data

6.1.5.4 Specification of management functions (FMT_SMF.1)

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions:

- Management of Control Panel user authorization (**FMT_MOF.1**)
- Management of Windows Sign In (**FMT_MOF.1**)
- Management of LDAP Sign In (**FMT_MOF.1**)
- Management of account lockout policy for Local Administrator account (**FMT_MOF.1**)
- Management of Inactivity Timeout for Control Panel sign-in sessions (**FMT_MOF.1**)
- Management of enhanced security event logging (**FMT_MOF.1**)
- Management of IPsec (**FMT_MOF.1**)
- Management of IPsec/Firewall address templates (**FMT_MSA.1**)
- Management of permission sets (**FMT_MSA.1**)
- Management of permissions associated with permission sets (**FMT_MSA.1**)
- Management of IPsec/Firewall service templates (**FMT_MSA.1**)
- Management of Device Administrator Password (**FMT_MTD.1**)
- Management of CA certificates (**FMT_MTD.1**)
- Management of identity certificates (**FMT_MTD.1**)
- Management of network identity certificate (**FMT_MTD.1**)

6.1.5.5 Security roles (FMT_SMR.1)

FMT_SMR.1.1 The TSF shall maintain the roles **U.ADMINISTRATOR**, **U.NORMAL**.

FMT_SMR.1.2 The TSF shall be able to associate users with roles.

6.1.6 Protection of the TSF (FPT)

6.1.6.1 Restricted forwarding of data to external interfaces (FPT_FDI_EXP.1)

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on **any external Interface** from being forwarded without further processing by the TSF to any **Shared-medium Interface**.

6.1.6.2 Reliable time stamps (FPT_STM.1)

FPT_STM.1.1 The TSF shall be able to provide reliable time stamps.

6.1.6.3 TSF testing (FPT_TST.1)

FPT_TST.1.1 The TSF shall run a suite of self tests **at the request of the authorised user** to demonstrate the correct operation of

- **System Clock - Timestamp verification**
- **LDAP Sign In - LDAP Settings verification**
- **Windows Sign In (via Kerberos) - Windows Settings verification**

FPT_TST.1.2 The TSF shall provide authorised users with the capability to verify the integrity of

- **Device Administrator Password**
- **Windows Sign In settings**
- **LDAP Sign In settings**
- **Permission sets**
- **Permissions associated with permission sets**
- **Network user to permission set relationships**
- **Network group to permission set relationships**
- **“Allow users to choose alternate sign-in methods at the product control panel” function enable/disable setting**

FPT_TST.1.3 The TSF shall provide authorised users with the capability to verify the integrity of **stored TSF executable code**.

6.1.7 TOE access (FTA)

6.1.7.1 TSF-initiated termination of Control Panel sign-in session (FTA_SSL.3)

FTA_SSL.3.1 The TSF shall terminate an interactive *Control Panel sign-in* session after **a an administrator-configurable amount of user inactivity**.

6.1.8 Trusted path/channels (FTP)

6.1.8.1 Inter-TSF trusted channel (FTP_ITC.1)

FTP_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the ~~channel~~ *communicated* data from modification or disclosure.

FTP_ITC.1.2 The TSF shall permit **the TSF, another trusted IT product** to initiate communication via the trusted channel.

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for **communication of D.DOC, D.FUNC, D.PROT, and D.CONF over any Shared-medium Interface.**

6.2 Security Functional Requirements Rationale

6.2.1 Coverage

The following table provides a mapping of SFR to the security objectives, showing that each security functional requirement addresses at least one security objective.

Security functional requirements	Objectives
FAU_GEN.1	O.AUDIT.LOGGED
FAU_GEN.2	O.AUDIT.LOGGED
FCS_CKM.1-ipsec	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FCS_CKM.1-job	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT
FCS_CKM.2	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT

Security functional requirements	Objectives
FCS_COP.1-ipsec	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FCS_COP.1-job	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT
FCS_RBG_EXT.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FDP_ACC.1-cac	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT
FDP_ACC.1-tfac	O.USER.AUTHORIZED
FDP_ACF.1-cac	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT
FDP_ACF.1-tfac	O.USER.AUTHORIZED
FDP_RIP.1	O.DOC.NO_DIS
FIA_AFL.1	O.USER.AUTHORIZED
FIA_ATD.1	O.USER.AUTHORIZED
FIA_SOS.1	O.USER.AUTHORIZED
FIA_UAU.1	O.INTERFACE.MANAGED, O.USER.AUTHORIZED
FIA_UAU.2	O.INTERFACE.MANAGED, O.USER.AUTHORIZED
FIA_UAU.7	O.CONF.NO_DIS

Security functional requirements	Objectives
FIA_UID.1	O.AUDIT.LOGGED, O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.INTERFACE.MANAGED, O.PROT.NO_ALT, O.USER.AUTHORIZED
FIA_UID.2	O.AUDIT.LOGGED, O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.INTERFACE.MANAGED, O.PROT.NO_ALT, O.USER.AUTHORIZED
FIA_USB.1	O.USER.AUTHORIZED
FMT_MOF.1	O.PROT.NO_ALT
FMT_MSA.1	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.USER.AUTHORIZED
FMT_MTD.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.PROT.NO_ALT
FMT_SMF.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FMT_SMR.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT, O.USER.AUTHORIZED
FPT_FDI_EXP.1	O.INTERFACE.MANAGED

Security functional requirements	Objectives
FPT_STM.1	O.AUDIT.LOGGED
FPT_TST.1	O.SOFTWARE.VERIFIED
FTA_SSL.3	O.INTERFACE.MANAGED, O.USER.AUTHORIZED
FTP_ITC.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT

Table 33: Mapping of security functional requirements to security objectives

6.2.2 Sufficiency

The following rationale provides justification for each security objective for the TOE, showing that the security functional requirements are suitable to meet and achieve the security objectives:

Security objectives	Rationale
O.AUDIT.LOGGED	<p>The objective:</p> <ul style="list-style-type: none"> The TOE shall create and maintain a log of TOE use and security-relevant events, and prevent its unauthorized disclosure or alteration. <p>is met by:</p> <ul style="list-style-type: none"> FAU_GEN.1 which enforces audit policies by requiring logging of relevant events. FAU_GEN.2 which enforces audit policies by requiring logging of information associated with audited events. FIA_UID.1 and FIA_UID.2 which support audit policies by associating user identity with events FPT_STM.1 which supports audit policies by requiring time stamps associated with events.
O.CONF.NO_ALT	<p>The objective:</p> <ul style="list-style-type: none"> The TOE shall protect TSF Confidential Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment.

Security objectives	Rationale
	<ul style="list-style-type: none"> • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MTD.1 which enforce protection by restricting access. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.CONF.NO_DIS</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect TSF Confidential Data from unauthorized disclosure. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel protected from unauthorized disclosure. • FCS_COP.1-ipsec which specifies the RSA signature generation and verification along with the AES and HMAC cryptographic algorithms used by IPsec to help prevent unauthorized disclosure. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FIA_UAU.7 which masks the display of certain passwords and PINs during authentication. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MTD.1 which enforce protection by restricting access. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles.

Security objectives	Rationale
	<ul style="list-style-type: none"> • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.DOC.NO_ALT</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect User Document Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.1-job which specifies the PBKDF2 with HMAC-SHA256 used by the TOE to process encrypted stored print jobs. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_COP.1-job which specifies the AES decryption algorithm used by the TOE to process encrypted stored print jobs. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FDP_ACC.1-cac which enforces protection by establishing an access control policy. • FDP_ACF.1-cac which supports access control policy by providing access control function. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MSA.1 which supports access control function by enforcing control of security attributes. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.DOC.NO_DIS</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect User Document Data from unauthorized disclosure. <p>is met by:</p>

Security objectives	Rationale
	<ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.1-job which specifies the PBKDF2 with HMAC-SHA256 used by the TOE to process encrypted stored print jobs. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel protected from unauthorized disclosure. • FCS_COP.1-ipsec which specifies the RSA signature generation and verification along with the AES and HMAC cryptographic algorithms used by IPsec to help prevent unauthorized disclosure. • FCS_COP.1-job which specifies the AES decryption algorithm used by the TOE to process encrypted stored print jobs. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FDP_ACC.1-cac which enforces protection by establishing an access control policy. • FDP_ACF.1-cac which supports access control policy by providing access control function. • FDP_RIP.1 which enforces protection by making residual data unavailable. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MSA.1 which supports access control function by enforcing control of security attributes. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.

Security objectives	Rationale
<p>O.FUNC.NO_ALT</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect User Function Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.1-job which specifies the PBKDF2 with HMAC-SHA256 used by the TOE to process encrypted stored print jobs. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_COP.1-job which specifies the AES decryption algorithm used by the TOE to process encrypted stored print jobs. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FDP_ACC.1-cac which enforces protection by establishing an access control policy. • FDP_ACF.1-cac which supports access control policy by providing access control function. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MSA.1 which supports access control function by enforcing control of security attributes. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.INTERFACE.MANAGED</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall manage the operation of external interfaces in accordance with security policies. <p>is met by:</p> <ul style="list-style-type: none"> • FIA_UAU.1 and FIA_UAU.2 which enforce management of external interfaces by requiring user authentication.

Security objectives	Rationale
	<ul style="list-style-type: none"> • FIA_UID.1 and FIA_UID.2 which enforce management of external interfaces by requiring user identification. • FPT_FDI_EXP.1 which enforces management of external interfaces by requiring (as needed) administrator control of data transmission from external Interfaces to Shared-medium Interfaces. • FTA_SSL.3 which enforces management of external interfaces by terminating inactive sessions.
<p>O.PROT.NO_ALT</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect TSF Protected Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MOF.1 which specifies the roles that can manage the security functions. • FMT_MTD.1 which enforce protection by restricting access. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.SOFTWARE.VERIFIED</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall provide procedures to self-verify executable code in the TSF. <p>is met by:</p> <ul style="list-style-type: none"> • FPT_TST.1 which enforces verification of software by requiring the TOE include self-tests.

Security objectives	Rationale
O.USER.AUTHORIZED	<p>The objective:</p> <ul style="list-style-type: none"> The TOE shall require identification and authentication of Users, and shall ensure that Users are authorized in accordance with security policies before allowing them to use the TOE. <p>is met by:</p> <ul style="list-style-type: none"> FDP_ACC.1-tfac which enforces authorization by establishing an access control policy. FDP_ACF.1-tfac which supports access control policy by providing access control function. FIA_AFL.1 which locks Device Administrator account (a.k.a. Local Administrator account) after an administrator configurable positive integer of unsuccessful Control Panel authentication attempts via Local Device Sign In method. FIA_ATD.1 which supports authorization by associating security attributes with users. FIA_SOS.1 which specifies the password/PIN strength of certain authentication mechanisms. FIA_UAU.1 and FIA_UAU.2 which enforce authorization by requiring user authentication. FIA_UID.1 and FIA_UID.2 which enforce authorization by requiring user identification. FIA_USB.1 which enforces authorization by distinguishing subject security attributes associated with User Roles. FMT_MSA.1 which support access control function by enforcing control of security attributes. FMT_SMR.1 which supports authorization by requiring security roles. FTA_SSL.3 which enforces authorization by terminating inactive sessions.

Table 34: Security objectives for the TOE rationale

6.2.3 Security requirements dependency analysis

The following table demonstrates the dependencies of SFRs modeled in CC Part 2 and how the SFRs for the TOE resolve those dependencies:

Security functional requirement	Dependencies	Resolution
FAU_GEN.1	FPT_STM.1	FPT_STM.1
FAU_GEN.2	FAU_GEN.1	FAU_GEN.1

Security functional requirement	Dependencies	Resolution
	FIA_UID.1	FIA_UID.1
FCS_CKM.1-ipsec	[FCS_CKM.2 or FCS_COP.1]	FCS_CKM.2 FCS_COP.1-ipsec
	FCS_CKM.4	This dependency is unresolved. The generated keys are not formally destroyed. The object reuse mechanisms of the operating system prevent their use except in the intended context.
FCS_CKM.1-job	[FCS_CKM.2 or FCS_COP.1]	FCS_COP.1-job
	FCS_CKM.4	This dependency is unresolved. The derived keys are not formally destroyed. The object reuse mechanisms of the operating system prevent their use except in the intended context.
FCS_CKM.2	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1-ipsec
	FCS_CKM.4	This dependency is unresolved. The generated keys are not formally destroyed. The object reuse mechanisms in the operating system prevent their use except in the intended context.
FCS_COP.1-ipsec	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1-ipsec
	FCS_CKM.4	This dependency is unresolved. The keys used for encryption, decryption, and data authentication are not formally destroyed. The object reuse mechanisms in the operating system prevent their use except in the intended context.
FCS_COP.1-job	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1-job
	FCS_CKM.4	This dependency is unresolved. The keys used for the decryption are not formally destroyed. The object reuse mechanisms in the operating system prevent their use except in the intended context.
FCS_RBG_EXT.1	No dependencies	

Security functional requirement	Dependencies	Resolution
FDP_ACC.1-cac	FDP_ACF.1	FDP_ACF.1-cac
FDP_ACC.1-tfac	FDP_ACF.1	FDP_ACF.1-tfac
FDP_ACF.1-cac	FDP_ACC.1	FDP_ACC.1-cac
	FMT_MSA.3	This dependency is unresolved. The Job PIN, Job Encryption Password, and Permission Sets do not have default values and do not allow for the specification of alternative initial values.
FDP_ACF.1-tfac	FDP_ACC.1	FDP_ACC.1-tfac
	FMT_MSA.3	This dependency is unresolved. The IP service templates, associations of sign in method to a Control Panel application, and Permission Sets do not have default values and do not allow for the specification of alternative initial values.
FDP_RIP.1	No dependencies.	
FIA_AFL.1	FIA_UAU.1	FIA_UAU.1
FIA_ATD.1	No dependencies.	
FIA_SOS.1	No dependencies.	
FIA_UAU.1	FIA_UID.1	FIA_UID.1
FIA_UAU.2	FIA_UID.1	FIA_UID.2
FIA_UAU.7	FIA_UAU.1	FIA_UAU.1
FIA_UID.1	No dependencies.	
FIA_UID.2	No dependencies.	
FIA_USB.1	FIA_ATD.1	FIA_ATD.1
FMT_MOF.1	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MSA.1	[FDP_ACC.1 or FDP_IFC.1]	FDP_ACC.1-cac FDP_ACC.1-tfac

Security functional requirement	Dependencies	Resolution
	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MTD.1	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_SMF.1	No dependencies.	
FMT_SMR.1	FIA_UID.1	FIA_UID.1
FPT_FDI_EXP.1	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FPT_STM.1	No dependencies.	
FPT_TST.1	No dependencies.	
FTA_SSL.3	No dependencies.	
FTP_ITC.1	No dependencies.	

Table 35: TOE SFR dependency analysis

6.3 Security Assurance Requirements

The security assurance requirements for the TOE are the Evaluation Assurance Level 3 components as specified in [CC] part 3, augmented by ALC_FLR.2.

The following table shows the Security assurance requirements, and the operations performed on the components according to CC part 3: iteration (Iter.), refinement (Ref.), assignment (Ass.) and selection (Sel.).

Security assurance class	Security assurance requirement	Source	Operations			
			Iter.	Ref.	Ass.	Sel.
ADV Development	ADV_ARC.1 Security architecture description	CC Part 3	No	No	No	No
	ADV_FSP.3 Functional specification with complete summary	CC Part 3	No	No	No	No
	ADV_TDS.2 Architectural design	CC Part 3	No	No	No	No

Security assurance class	Security assurance requirement	Source	Operations			
			Iter.	Ref.	Ass.	Sel.
AGD Guidance documents	AGD_OPE.1 Operational user guidance	CC Part 3	No	No	No	No
	AGD_PRE.1 Preparative procedures	CC Part 3	No	No	No	No
ALC Life-cycle support	ALC_CMC.3 Authorisation controls	CC Part 3	No	No	No	No
	ALC_CMS.3 Implementation representation CM coverage	CC Part 3	No	No	No	No
	ALC_DEL.1 Delivery procedures	CC Part 3	No	No	No	No
	ALC_DVS.1 Identification of security measures	CC Part 3	No	No	No	No
	ALC_FLR.2 Flaw reporting procedures	CC Part 3	No	No	No	No
	ALC_LCD.1 Developer defined life-cycle model	CC Part 3	No	No	No	No
ASE Security Target evaluation	ASE_INT.1 ST introduction	CC Part 3	No	No	No	No
	ASE_CCL.1 Conformance claims	CC Part 3	No	No	No	No
	ASE_SPD.1 Security problem definition	CC Part 3	No	No	No	No
	ASE_OBJ.2 Security objectives	CC Part 3	No	No	No	No
	ASE_ECD.1 Extended components definition	CC Part 3	No	No	No	No
	ASE_REQ.2 Derived security requirements	CC Part 3	No	No	No	No
	ASE_TSS.1 TOE summary specification	CC Part 3	No	No	No	No
ATE Tests	ATE_COV.2 Analysis of coverage	CC Part 3	No	No	No	No
	ATE_DPT.1 Testing: basic design	CC Part 3	No	No	No	No
	ATE_FUN.1 Functional testing	CC Part 3	No	No	No	No

Security assurance class	Security assurance requirement	Source	Operations			
			Iter.	Ref.	Ass.	Sel.
	ATE_IND.2 Independent testing - sample	CC Part 3	No	No	No	No
AVA Vulnerability assessment	AVA_VAN.2 Vulnerability analysis	CC Part 3	No	No	No	No

Table 36: Security assurance requirements

6.4 Security Assurance Requirements Rationale

The evaluation assurance level has been chosen to match a Basic attack potential commensurate with the threat environment that is experienced by typical consumers of the TOE and commensurate with [PP2600.1]. In addition, the evaluation assurance level has been augmented with ALC_FLR.2 commensurate with the augmented flaw remediation capabilities offered by the developer beyond those required by the evaluation assurance level and commensurate with [PP2600.1].

7 TOE Summary Specification

7.1 TOE Security Functionality

The following section explains how the security functions are implemented by the TOE. The different TOE security functions cover the various SFR classes.

The primary security features of the TOE are:

- Auditing
- Cryptography
- Identification and authentication
- Data protection and access control
- Protection of the TSF
- TOE access protection
- Trusted channel communication and certificate management
- User and access management

7.1.1 Auditing

The TOE performs auditing of security-relevant functions. The TOE connects and sends audit records to a syslog server (part of the Operational Environment) for long-term storage and audit review. The records sent to the syslog server by the TOE are only those generated by the TOE while the syslog server has an established connection with the TOE. If the connection between the TOE and syslog server breaks and is later reestablished, only records generated by the TOE after the connection is reestablished are sent to the syslog server. Both the Jetdirect Inside and HCD System firmware generate audit records.

To generate the proper set of audit events, the TOE's enhanced security event logging must be enabled.

The complete audit record format and audit record details are provided in the [CCECG] section Enhanced security event logging messages. The [CCECG] groups the events into event categories in the subsection Log messages.

The following table provides a mapping of the [CCECG] event categories to the events defined in FAU_GEN.1. (The ST author's intent is to not consume 30 pages of the ST by repeating the audit events listed in the [CCECG], but to refer the ST reader to the appropriate category of events in the [CCECG] that map to the events defined in FAU_GEN.1.).

Required event	Additional information	[CCECG] "Log messages" category and records
Audit start-up	None	<u>Security event logging</u> Records: <ul style="list-style-type: none"> • Auditing was started during boot up • Auditing was restarted using EWS or SNMP
Audit shutdown	None	<u>Security event logging</u> Record: <ul style="list-style-type: none"> • Auditing was stopped using EWS or SNMP
Job completion	Type of job	<u>Job completion</u> Records:

Required event	Additional information	[CCECG] "Log messages" category and records
		<ul style="list-style-type: none"> • Copy job completion • Email job completion • Save (scan) to SharePoint job completion • Save (scan) to Network Folder job completion • Send Fax job completion • Save to Device Memory job completion • Receive fax job completion • Retrieve from Device Memory job completion (Print from job storage) • Print job completion
Successful and unsuccessful user authentication	None	<u>Local device sign in</u> Record: <ul style="list-style-type: none"> • Local Device sign method succeeded for the specified user • Local Device sign-in method failed
		<u>Windows sign in</u> Record: <ul style="list-style-type: none"> • Windows sign in method succeeded for the specified user • Windows sign in method failed for the specified user
		<u>LDAP sign in</u> Record: <ul style="list-style-type: none"> • LDAP sign in method succeeded for the specified user • LDAP sign in method failed for the specified user
Successful and unsuccessful user identification	None	Same events as the "Successful and unsuccessful user authentication" events
Use of management functions	None	<u>Management of Device Administrator password</u> Record: <ul style="list-style-type: none"> • Device administrator password modified
		<u>Management of account lockout policy for Local Administrator account</u> Records: <ul style="list-style-type: none"> • Account Lockout Policy enabled • Account Lockout Policy disabled • Account Lockout Policy setting modified

Required event	Additional information	[CCECG] "Log messages" category and records
		<p><u>Management of Windows Sign In</u> Records:</p> <ul style="list-style-type: none"> • Windows Sign In enabled • Windows Sign In disabled • Windows Sign In configuration modified <p><u>Management of LDAP Sign In</u> Records:</p> <ul style="list-style-type: none"> • LDAP Sign In enabled • LDAP Sign In disabled • LDAP Sign In configuration modified <p><u>Management of Control Panel user authorization ("Allow users to choose alternate sign-in methods at the product control panel" function)</u> Record:</p> <ul style="list-style-type: none"> • Sign In and Permission Policy settings modified <p><u>Management of Inactivity Timeout for Control Panel sign-in sessions</u> Records:</p> <ul style="list-style-type: none"> • Control Panel Inactivity Timeout Changed <p><u>Management of permission sets</u> Records:</p> <ul style="list-style-type: none"> • Permission Set added • Permission Set copied • Permission Set deleted • Permission Set modified <p><u>Management of permissions associated with permission sets</u> Records:</p> <ul style="list-style-type: none"> • Permission Set modified <p><u>Management of CA certificates</u> Records:</p> <ul style="list-style-type: none"> • Device CA certificate installed • Device CA certificate deleted <p><u>Management of identity certificates</u> Records:</p> <ul style="list-style-type: none"> • Device Identity certificate and private key installed • Device Identity certificate deleted

Required event	Additional information	[CCECG] "Log messages" category and records
		<p><u>Management of network identity certificate</u> Records:</p> <ul style="list-style-type: none"> • Device Identity certificate for network identity selected <hr/> <p><u>Management of IPsec/Firewall address templates</u> Record:</p> <ul style="list-style-type: none"> • IPsec/Firewall address policy added • IPsec/Firewall address policy deleted • IPsec/Firewall address policy modified <hr/> <p><u>Management of IPsec/Firewall service templates</u> Record:</p> <ul style="list-style-type: none"> • IPsec/Firewall service policy added • IPsec/Firewall service policy deleted • IPsec/Firewall service policy modified
Modification to the group of users that are part of a role	None	<p><u>Network user to permission set relationships</u> Records:</p> <ul style="list-style-type: none"> • User to permission set relationship added • User to permission set relationship deleted <hr/> <p><u>Network group to permission set relationships</u> Records:</p> <ul style="list-style-type: none"> • Group to permission set relationship added • Group to permission set relationship deleted <hr/> <p><u>IPsec/Firewall rules</u> Records:</p> <ul style="list-style-type: none"> • IPsec/Firewall rule added • IPsec/Firewall rule deleted • IPsec/Firewall rule enabled • IPsec/Firewall rule disabled
Changes to the time	None	<p><u>System time</u> Records:</p> <ul style="list-style-type: none"> • System time changed
Failure of the trusted channel functions	None	<p><u>IKEv1 phase 1 negotiations</u> Records:</p> <ul style="list-style-type: none"> • IKEv1 phase 1 negotiation failed initiated by the client computer • IKEv1 phase 1 negotiation failed initiated by the local device (TOE)

Required event	Additional information	[CCECG] "Log messages" category and records
		<p><u>IKEv1 phase 2 negotiations</u> Records:</p> <ul style="list-style-type: none"> • IKEv1 phase 2 negotiation failed initiated by the client computer • IKEv1 phase 2 negotiation failed initiated by the local device (TOE) <hr/> <p><u>IKEv2 phase 1 negotiations</u> Records:</p> <ul style="list-style-type: none"> • IKEv2 phase 1 negotiation failed initiated by the client computer • IKEv2 phase 1 negotiation failed initiated by the local device (TOE) <hr/> <p><u>IKEv2 phase 2 negotiations</u> Records:</p> <ul style="list-style-type: none"> • IKEv2 phase 2 negotiation failed initiated by the client computer • IKEv2 phase 2 negotiation failed initiated by the local device (TOE)
		<p><u>IPsec ESP</u> Records:</p> <ul style="list-style-type: none"> • IPsec ESP

Each audit record includes the date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event.

The subject identity used in the audit record is formed in the following manner. For Local Device Sign In, the subject's identity contains the user's Display Name prefixed with "LOCAL". For LDAP Sign In, the subject's identity contains the user's LDAP user name prefixed with either the LDAP server's host name or IP address then a "\". For Windows Sign In, the subject's identity contains the user's Windows domain name and Windows user name separated by a "\". For IPsec, the subject's identity is the user's IP address.

The time source used for the audit record timestamps is discussed in [section 7.1.5.3](#).

This section maps to the following SFRs:

- [FAU_GEN.1](#)
- [FAU_GEN.2](#)

7.1.2 Cryptography

The TOE uses IPsec to protect its communications channels. The QuickSec cryptographic library, which is part of the Operational Environment, is used to supply the cryptographic algorithms for IPsec. See [section 7.1.7](#) for more information.

The TOE supports the decrypting of an encrypted stored print job. To decrypt an encrypted stored print job, the TOE derives a key from a Job Encryption Password and unlocks the decryption key using the derived

key. The TOE then decrypts the encrypted stored print job using the decryption key. The key derivation code and the decryption code used by the TOE is included in the TOE. See [section 7.1.4.3](#) for more information.

7.1.3 Identification and authentication (I&A)

The TOE supports multiple Control Panel sign in methods, both local and remote methods. It also supports IPsec identification and mutual authentication.

The following interfaces support I&A:

- Control Panel
- IPsec

The following interface allows a user limited TOE access without I&A:

- Analog Fax Phone Line (for incoming analog fax phone line users)

7.1.3.1 Control Panel I&A

The Control Panel interface supports both local and remote sign in methods. The following sign in methods are allowed with the evaluated configuration:

- Local sign in method:
 - Local Device Sign In (Local Administrator account only)
- Remote sign in methods:
 - LDAP Sign In
- Windows Sign In (via Kerberos)

(The servers for the remote sign in methods are part of the Operational Environment.)

The Control Panel also allows both non-administrative users (U.NORMAL) and administrative users (U.ADMINISTRATOR) to sign in. Prior to sign in, the Control Panel allows users to perform the following functions:

- Viewing of help information
- Viewing of device status information
- Viewing of network connectivity status information
- Viewing of system time
- Viewing of Web Services status information
- Viewing of Welcome screen
- Selection of Sign In
- Selection of sign-in method from Sign In screen
- Selection of an application
- Printing of help information
- Printing of network connectivity status information
- Changing language for the session
- Resetting of session

The TOE contains a local user database that defines a single administrative (U.ADMINISTRATOR) device user account called the Local Administrator account to support the Local Device Sign In mechanism. The Local Administrator contains the following attributes:

- Display Name
- Administrator Access Code
- Permission Set

The Display Name and Permission Set attributes for the Local Administrator account are hardcoded. There values are:

- Display Name = admin
- Permission Set = Device Administrator permission set

Only the Administrator Access Code (a.k.a. Device Administrator Password) is manageable. It can be managed via the EWS and SNMP. The Device Administrator Password can be set to value between 1 and 16 characters in length. Additionally, the Device Administrator Password can contain upper- and lower-case letters, numbers, and the following special characters:

- "!", "@", "#", "\$", "%", "^", "&", "*", "(", ")", ":", ";", "<", "=", ">", "?", "[", "]", "_", "|", "~", "{", "}"

In the evaluated configuration, the Device Administrator Password must be at a minimum 8 characters in length and must contain three of the following: uppercase letters, lowercase letters, numbers, and special characters.

The Device Administrator Password can also be used to sign into the EWS from a remote computer in addition to signing in at the Control Panel.

The Permission Set defines/determines a user's access to many of the TOE's functions. Permission Sets are discussed in more detail in section 7.1.4.1.

Like Local Device Sign In, the remote sign-in methods are used by the Control Panel. The TOE receives authentication credentials from the Control Panel users and passes the credentials to the remote sign-in method. The remote sign in method returns an authentication decision to the TOE. This decision is then enforced by the TOE by granting or denying access to the Control Panel user.

In the case of LDAP, the user name and password entered at the Control Panel are used to bind to the LDAP server. The user must have a valid and active LDAP account in order to successfully bind using this method.

In the case of Kerberos, the user name and password entered at the Control Panel are used to authenticate with the Windows domain controller. The user must have a valid and active Windows domain account in order to successfully bind using this method.

When a user successfully signs in to the Control Panel, the Permission Set associated with that user is bound to that user instance and defines the user's User Role.

When users authenticate through the Control Panel, the TOE displays a dot character of a PIN, Access Code, or password typed to prevent onlookers from viewing another user's authentication data. (Job PINs are not authentication data, but the Job PIN is masked.)

The TOE contains account lockout functionality to help protect against brute-force attacks. The account lockout functionality applies to the Device Administrator account (a.k.a. Local Administrator account) only.

The lockout mechanism uses the following control values.

- Account lockout maximum attempts
- Account lockout interval
- Account reset lockout counter interval

The account lockout maximum attempts value allows an administrator to control the number of failed authentication attempts on the account before it is locked. The administrator can choose a value between 3 and 10 inclusively. Consecutive failed authentication attempts using the same authentication credential count as a single failed authentication attempt. The counted failed attempts must happen within the value set for the account reset lockout counter interval; otherwise, the maximum attempts counter is reset when the account reset lockout counter interval value elapses.

This section maps to the following SFRs:

- FIA_AFL.1
- FIA_ATD.1
- FIA_UAU.1
- FIA_UAU.7
- FIA_UID.1
- FIA_USB.1
- FMT_SMR.1

7.1.3.2 IPsec I&A

The TOE uses IPsec to identify and mutually authenticate the following user types:

- Administrative Computer (U.ADMINISTRATOR)
- Network Client Computers (U.NORMAL)

IPsec uses IP addresses and RSA X.509v3 certificates via the IKE protocols (IKEv1 and IKEv2) to identify and authenticate, respectively, a client computer. The TOE contains one X.509v3 identity certificate designated as the network identity certificate and one or more X.509v3 CA certificates to use for the IPsec mutual authentication. The TOE does not maintain individual X.509v3 certificates of its client computers.

The User Identity of a client computer is its IP address. The TOE's internal firewall maintains lists (IPsec/Firewall address templates) of IP addresses of client computers that can connect to the TOE as a Network Client Computer and as the Administrative Computer. If a client computer has an unrecognized IP address that is not defined in the IPsec/Firewall as either the Administrative Computer or a Network Client Computer, then the client computer is not allowed to connect to the TOE. Similarly, if the client computer presents an invalid or unknown (unrecognized CA) X.509v3 certificate, the IPsec mutual authentication mechanism will fail. The TOE uses RSA signature generation and signature verification methods

as part of this validity checking process.

The TOE also uses IP addresses and X.509v3 certificates via the IKE protocols to connect to and identify other trusted IT products. See [section 7.1.7](#) for more details.

The TOE supports the following versions of the IKE protocol:

- IKEv1 ([RFC4109])
- IKEv2 ([RFC4306] and [RFC4718])

Mutual identification and authentication must be completed before any tasks can be performed by a Network Client Computer or an Administrative Computer.

The service templates define the User Role of a client computer. The following service templates are used to define the TOE's User Roles for IPsec users:

- All Services (U.ADMINISTRATOR)
- Network Client Computers (U.NORMAL)

The All Services service template is provided with the TOE. The Network Client Computers service template is created by the administrator as part of the TOE's configuration guidance.

Both the Administrative Computer and the Network Client Computers can access the PJI Interface, but only the Administrative Computer can access the EWS (HTTP) interface and SNMP interface.

IP address management is discussed in [section 7.1.4.5](#). Certificate management is discussed in [section 7.1.7](#).

This section maps to the following SFRs:

- [FIA_ATD.1](#)
- [FIA_UAU.2](#)
- [FIA_UID.2](#)
- [FIA_USB.1](#)
- [FMT_SMR.1](#)

7.1.4 Data protection and access control

7.1.4.1 Permission Sets

For Control Panel users, the TOE uses a user's User Role (as determined by each user's Permission Set) to determine a user's access to many TOE functions. Only U.ADMINISTRATOR can query, create, modify, and delete Permission Sets. In addition, only U.ADMINISTRATOR can query, create, modify, and delete the Permission Set associations to users. The TOE contains the following built-in Permission Sets:

- Device Guest
- Device Administrator (U.ADMINISTRATOR)
- Device User (U.NORMAL)

Built-in Permission Sets cannot be renamed or deleted. The permissions associated with the Device Administrator Permission Set can be queried but cannot be disabled. The permissions associated with the Device Guest and Device User Permission Sets can be queried and enabled or disabled.

The Device Administrator Permission Set has all permissions set to grant access. In the evaluated configuration, the Device Guest Permission Set has permissions configured to deny access, and the Device User permission set has zero administrative permissions configured to grant access.

The Device Administrator Permission Set is automatically granted to the Local Administrator account (U.ADMINISTROR) and can be granted to other administrator accounts (U.ADMINISTRATOR) defined in remote authentication server (e.g. LDAP server) used by remote sign-in method (e.g. LDAP Sign In).

The Device Guest Permission Set is associated with a Control Panel session when no user signed in. In the evaluated configuration, the Device Guest Permission Set has all permissions configured to deny access. With all permissions in the Device Guest Permission Set configured to deny access, the TOE requires all users to sign in at the Control Panel in order to perform any document-processing or administrative functions at the Control Panel.

Permissions in a Permission Set include permissions as high-level as executing the Print from Job Storage application. They also include more granular permissions that control administrative functions like the ability to delete any job in Job Storage. Each permission in a Permission Set has two possible values: deny access and grant access.

This section maps to the following SFRs:

- [FMT_MSA.1](#)
- [FMT_SMF.1](#)

7.1.4.2 Job PINs

Users can control access to each stored print and stored copy job that they place under the TOE's control by assigning a Job PIN to each job. A Job PIN limits access to a stored print or stored copy job while the job resides under the TOE's control and allows a user to control when the job is printed so that physical access to the hard copies can be controlled by the user. A Job PIN must be 4 digits (0000-9999) in length. Only one Job PIN is permitted per job.

A Job PIN can only be assigned to a job at the time of creation. They cannot be assigned after the job already resides under the TOE's control. A user assigns a Job Pin to a stored copy job via the Control Panel. A user assigns a Job PIN to a print job at the client computer. The Job PIN is embedded in the print job by the client computer prior to sending the print job to the TOE. Once the TOE receives a print job containing a Job PIN, the TOE enforces the Job PIN embedded in that job.

Once a Job PIN is set on a job and the job resides under the TOE's control, the Job PIN cannot be modified or deleted (i.e., the TOE does not provide the ability to manage Job PINs).

A job with a Job Encryption Password cannot be assigned a Job PIN.

This section maps to the following SFRs:

- [FIA_SOS.1](#)

7.1.4.3 Job Encryption Passwords

The TOE can store and decrypt encrypted stored print jobs received from a client computer. A stored job is first encrypted with AES-256 in CBC mode using an encryption / decryption key and protected with a key derived from the user-specified Job Encryption Password. The stored print job is then sent encrypted to the TOE and stored encrypted by the TOE. To decrypt the encrypted stored print job at the Control Panel, a user must enter the correct Job Encryption Password that was used to derive the key to protect the job. The key derivation function and decryption algorithm are included in the TOE. Only one Job Encryption Password is permitted per job.

A Job Encryption Password can only be assigned to a job at job creation time. A user assigns a Job Encryption Password to a print job via the client computer. Once a Job Encryption Password is set on a job, it cannot be changed or removed. In addition, a job with a Job Encryption Password cannot be assigned a Job PIN.

This section maps to the following SFRs:

- [FCS_CKM.1-job](#)
- [FCS_COP.1-job](#)

7.1.4.4 Common access control

The TOE protects each non-fax job in Job Storage from non-administrative users through the use of a user identifier and a Job PIN or through the use of a Job Encryption Password. The user identifier for a stored print job received from a client computer is either assigned by that client computer or assigned by the user sending the print job from the client computer. For all other types of jobs, the user identifier is assigned by the TOE. Every non-fax job in Job Storage is assigned either a Job PIN or a Job Encryption Password by the user at job creation time. If the TOE receives a print job from a client computer without either a Job PIN or a Job Encryption Password, the TOE cancels the job.

The User Role, as defined by the user's Permission Set, defines each user's access. The default rules for a U.NORMAL User Role for accessing a non-fax job in Job Storage are:

- if the job is Job PIN protected:

- the job owner (i.e., the authenticated user who matches the job's user identifier) can access (read/delete D.DOC) the job without supplying the Job PIN
- any non-owner authenticated user who supplies the correct Job PIN can access (read/delete D.DOC) the job
- if the job is Job Encryption Password protected, any authenticated user who supplies the correct Job Encryption Password can access (read/delete D.DOC) the job

By default, a Control Panel administrator (U.ADMINISTRATOR) has a permission in their Permission Set that allows them to delete non-fax Job Storage jobs (D.DOC).

The TOE protects each fax job in Job Storage through the Permission Set mechanism. A user must have a specific fax permission in their Permission Set to access (read/delete D.DOC) received fax jobs stored in Job Storage. By default, only U.ADMINISTRATOR has this permission enabled. Faxes are automatically deleted by the TOE once they are printed.

Scan jobs are ephemeral and not stored in Job Storage. Only the user performing the scan can access the job on the TOE.

This section maps to the following SFRs:

- FDP_ACC.1-cac
- FDP_ACF.1-cac

7.1.4.5 TOE function access control

The TOE controls to TOE functions available at the Control Panel using permissions defined in Permission Sets. During the Control Panel sign-in process, the TOE authorizes the user after they are successfully identified and authenticated. As part of the user authorization process, the TOE associates Permission Sets to the user and then applies a Permission Set (which is the combination of the Permission Sets associated to the user). The applied Permission Set (a.k.a. session Permission Set) becomes the user's User Role. Access to each TOE function is configurable via a permission in Permission Sets by an administrator. A user can perform any function permitted in the session Permission Set. Control Panel applications (e.g., Copy, Fax, Print from Job Storage) use the user's session Permission Set to determine which of the application's functions should be allowed or disallowed for the user. A Control Panel user can perform the [PP2600.1] functions of F.CPY, F.DSR, F.FAX, F.PRT, F.SCN, and F.SMI as determined by the user's session Permission Set.

Each Control Panel application requires the user to have one or more specific permissions in their session Permission Set in order to access that application. In addition, the TOE's administrator can map sign-in methods to each Control Panel application and require the user to be authenticated to that sign-in method in order to access that application. The individual applications only check and enforce permissions. They do not check the sign-in methods. Instead, the TOE enforces the sign-in method requirement at the time that the user signs in to the TOE by removing permissions from the user's session Permission Set for each application in which the user's sign in method does not match the sign in method required by the TOE. By removing the permissions required by each non-matching application, the TOE limits the set of applications that the user can access.

Administrators can change/modify the sign-in method mapped to each application. In addition, the TOE provides the feature "Allow users to choose alternate sign-in methods at the product's control panel" which allows administrators to select if the sign-in method application mappings are enforced or ignored by the TOE. It is a function in the configuration settings which can be configured through the EWS (HTTP). When this function is disabled, the TOE enforces the "sign-in method to application" mappings and prunes (reduces) the user's session Permission Set accordingly. When this function is enabled, the sign-in method mappings are ignored by the TOE and the user's session Permission Set remains unchanged.

For IPsec users, the TOE uses the IPsec/Firewall to control access to the supported network service protocols. The IPsec/Firewall contains the IP addresses of authorized client computers grouped into address templates and the network service protocols grouped into service templates. The administrator

maps an address template to a service template using an IPsec/Firewall rule. Service templates, therefore, act as the User Roles for IPsec users. IP addresses of computers not contained in a rule are denied access to the TOE. The [PP2600.1] functions available to an authorized client computer are F.DSR, F.PRT, and F.SMI.

This section maps to the following SFRs:

- FDP_ACC.1-tfac
- FDP_ACF.1-tfac

7.1.4.6 Residual information protection

When the TOE deletes an object defined in section 6.1.3.5, the contents of the object are no longer available to TOE users.

This section maps to the following SFR:

- FDP_RIP.1

7.1.5 Protection of the TSF

7.1.5.1 Restricted forwarding of data to external interfaces (including fax separation)

The TOE allows an administrator to enable / disable the forwarding of data received from an External Interface to the Shared-medium interface. The terms External Interface and Shared-medium Interface are defined in [PP2600.1] and duplicated in section 8.2 of this Security Target. This implies that an administrator can configure the TOE to have a distinct functional separation between the analog fax phone line and the Shared-medium Interface (i.e., network interface) of the TOE. In the evaluated configuration, the forwarding of data functionality is disabled.

The analog fax hardware and the firmware that controls the fax hardware do not have the ability to access the Shared-medium fax functions. No pathway is provided to the Shared-medium interface from the fax. The TOE's analog fax functions only support the sending and receiving of fax data. Fax commands with potential for accessing the Shared-medium interface are not supported by the TOE.

This section maps to the following SFR:

- FPT_FDI_EXP.1

7.1.5.2 TSF self-testing

The EWS interface allows an administrator (U.ADMINISTRATOR) to execute a set of correct operations tests, TSF Data integrity tests, and integrity tests of TSF executable code. The specific security related tests available to the administrator are listed in FPT_TST.1. In some cases, the tests have pre-requisites that must be met prior to execution in order to receive valid results. For example, the LDAP Settings verification test requires LDAP Sign In to be configured and enabled prior to executing the test. The tests that may be available during self-test include:

- System Clock - Timestamp verification
- LDAP Settings verification
- Windows Setting verification

This section maps to the following SFR:

- FPT_TST.1

7.1.5.3 Reliable timestamps

The TOE contains a system clock that is used to generate reliable timestamps. Only administrators can manage the system clock.

The administrator can optionally configure the TOE to synchronize its system clock with a Network Time Protocol (NTP) server.

This section maps to the following SFR:

- **FPT_STM.1**

7.1.6 TOE access protection

The following session termination mechanisms are supported by the TOE:

- Inactivity timeout

7.1.6.1 Inactivity timeout

The TOE supports an inactivity timeout for Control Panel sign-in sessions. If a signed-in user is inactive for longer than the specified period of inactivity, the user is automatically signed out of the Control Panel by the TOE. The inactivity period is managed by the administrator via the EWS (HTTP) and the Control Panel. Only one inactivity period setting exists per TOE.

This section maps to the following SFR:

- **FTA_SSL.3**

7.1.7 Trusted channel communication and certificate management

Shared-medium communications (i.e., Ethernet) between the TOE and other trusted IT products use a trusted channel mechanism to protect the communications from disclosure and modification. The TOE also ensures the cryptographic operations are validated during policy processing such as validating digital signatures or encrypting and decrypting data. The following table provides a list of the mechanism(s) used to protect these channels and the channels protected by the mechanism(s).

Secure protocol	Network channel	Initiated by
IPsec	Email connections (SMTP gateway)	TOE
	EWS (HTTP) connections (including web browser & certificate upload)	Administrative Computer
	Windows domain controller (Kerberos) connections	TOE
	LDAP server connections	TOE
	NTP connections	TOE
	PJL connections	Administrative Computer & Network Client Computer

Secure protocol	Network channel	Initiated by
	Save to Network Folder connections (SMB, FTP)	TOE
	Save to SharePoint connections (<i>flow</i> models only)	TOE
	SNMP connections	Administrative Computer
	Syslog server connections	TOE

Table 37: Trusted channel connections

The TOE uses IPsec as means to provide trusted channel communications. IPsec uses X.509v3 certificates, the Encapsulating Security Payload (ESP), Internet Security Association and Key Management Protocol (ISAKMP), IKEv1, and IKEv2 protocols, and the cryptographic algorithms listed below to protect communications.

The cryptographic functions used by IPsec are implemented in the QuickSec cryptographic library version 5.1 ([QuickSec51]) which is produced by INSIDE Secure. The QuickSec cryptographic library is part of the Operational Environment. The TOE prepares the data and invokes the appropriate cryptographic functions, but the code in the QuickSec cryptographic library performs the processing and calculations required. INSIDE Secure performs regular and rigorous developer testing of the implementation of the cryptographic algorithms in the QuickSec cryptographic library.

In the evaluated configuration, the IPsec cryptographic algorithms supported are:

- RSA 2048-bit, and 3072-bit signature generation and verification (Operational Environment)
- DSA 2048-bit, 3072-bit, 4096-bit, 6144-bit, and 8192-bit key pair generation (Operational Environment)
- DH (IKEv1, IKEv2) key establishment / exchange (Operational Environment)
- AES-128, AES-192, and AES-256 in CBC mode for data transfers (Operational Environment)
- AES-256 (with ECB mode) for the CTR_DRBG(AES) (Operational Environment)
- CTR_DRBG(AES) (Operational Environment)
- SHA-1, SHA-256, SHA-384, and SHA-512 hashing (Operational Environment)
- HMAC-SHA1-96 (Operational Environment)
- HMAC-SHA-256-128 (Operational Environment)
- HMAC-SHA-384-192 (Operational Environment)
- HMAC-SHA-512-256 (Operational Environment)

IPsec is conformant to the MUST/MUST NOT requirements of the following IETF RFCs:

- [RFC4301] and [RFC4894] for IPsec
- [RFC4303] for ESP
- [RFC4306] for ISAKMP
- [RFC4109] and [RFC4894] for IKEv1

- [RFC4306], [RFC4718], and [RFC4894] for IKEv2.

The TOE maintains X.509v3 certificates for IPsec in the certificate store:

- One network identity certificate
- One or more Certificate Authority (CA) certificates

The EWS (HTTP) allow administrators to manage these X.509v3 certificates used by IPsec.

When the TOE is first powered on, it generates a self-signed identity certificate to use for network identity. In the evaluated configuration, the use of a self-signed identity certificate generated by the TOE for network identity is not permitted. The administrator must import a CA-signed identity certificate with private key and designate it for network identity usage. The TOE requires a network identity certificate to always exist; therefore, it allows the administrator to replace the network identity certificate used by IPsec.

The TOE uses a copy of the self-signed identity certificate it generates when first powered on as a CA certificate (self-signed) and comes with other CA certificates pre-installed. The administrator must obtain a CA certificate from the Operational Environment and install this certificate when setting up the evaluated configuration. The TOE allows the administrator to install and delete CA certificates used by IPsec.

This section maps to the following SFRs:

- FCS_CKM.1-ipsec
- FCS_CKM.2
- FCS_COP.1-ipsec
- FCS_RBG_EXT.1
- FMT_MTD.1
- FMT_SMF.1
- FTP_ITC.1

7.1.8 User and access management

The TOE supports the following roles:

- Administrators (U.ADMINISTRATOR)
- Users (U.NORMAL)

Administrators maintain and configure the TOE and Operational Environment. Users perform the standard print, copy, fax, etc. functions on the system.

In addition, the TOE performs many security management functions.

Only administrators can configure the list of Network Client Computers and the Administrative Computer that are allowed to connect to the TOE and the list of other trusted IT products to which the TOE will connect. Administrators do this by creating, modifying, and deleting IPsec/Firewall address templates, service templates, and rules via the TOE. Similarly, only administrators can create, modify, and delete address templates, service templates, and rules via the TOE for trusted IT products.

For each Control Panel application, an administrator can modify the association of a sign-in method to an application. (For example, the administrator can associate LDAP Sign In method to the Print from Job Storage application). In addition, administrators control whether or not a Control Panel user must use the administrator-selected sign-in method associated with the applications in order to access that application. This latter feature is controlled through the "Allow users to choose alternate sign-in methods at the product's control panel" function.

It's worth noting that although the following security attributes are enforced by the TOE, the TOE does not provide functionality to manage these attributes (i.e., the TOE cannot add, change, delete, or query these

attributes on an existing job) and the TOE does not provide default values for these attributes; therefore, there are no management SFRs specified in this ST for these security attributes:

- Job Encryption Password - The job is protected using a key derived from the Job Encryption Password by the Operational Environment. The TOE does not provide a mechanism to change or delete the password on the job.
- Job PIN - A print job's Job PIN is set by the Operational Environment (i.e., Network Client Computer). The TOE does not provide a mechanism to change or delete a Job PIN from a print job.

This section maps to the following SFRs:

- FMT_MOF.1
- FMT_MSA.1
- FMT_MTD.1
- FMT_SMF.1
- FMT_SMR.1

8 Abbreviations, Terminology and References

8.1 Abbreviations

AES

Advanced Encryption Standard

AH

Authentication Header (IPsec)

ASCII

American Standard Code for Information Interchange

CA

Certificate Authority

CBC

Cipher Block Chaining

SMB

Server Message Block

DNS

Domain Name System

eMMC

embedded MMC

ESP

Encapsulating Security Payload (IPsec)

EWS

Embedded Web Server

HCD

Hardcopy Device

HMAC

Hashed Message Authentication Code

HTML

Hypertext Markup Language

HTTP

Hypertext Transfer Protocol

IEEE

Institute of Electrical and Electronics Engineers, Inc.

IKE

Internet Key Exchange (IPsec)

IP

Internet Protocol

IPsec

Internet Protocol Security

ISAKMP

Internet Security Association Key Management Protocol (IPsec)

LCD

Liquid Crystal Display

LDAP

Lightweight Directory Access Protocol

MAC

Message Authentication Code

MFP

Multifunction Printer

MMC

MultiMediaCard

NFC

Near Field Communication

NTLM

Microsoft NT LAN Manager

NTP

Network Time Protocol

OXF

Open Extensibility Platform

OXPd

OXF device layer

PIN

Personal Identification Number

PJL

Printer Job Language

PBKDF2

Password-Based Key Derivation Function 2

PRF

Pseudo-random Function

PSTN

Public Switched Telephone Network

RSA

Rivest-Shamir-Adleman

SFR

Security Functional Requirement

SHA

Secure Hash Algorithm

SMB

Server Message Block

SMTP

Simple Mail Transfer Protocol

SNMP

Simple Network Management Protocol

SOAP

Simple Object Access Protocol

SSH

Secure Shell

TOE

Target of Evaluation

USB

Universal Serial Bus

WINS

Windows Internet Name Service

XML

Extensible Markup Language

8.2 Terminology

This section contains definitions of technical terms that are used with a meaning specific to this document. Terms defined in the [CC] are not reiterated here, unless stated otherwise.

Administrative User

This term refers to a user with administrative control of the TOE.

Authentication Data

This includes the Access Code and/or password for each user of the product.

Control Panel Application

An application that resides in the firmware and is selectable by the user via the Control Panel.

Device Administrator Password

The password used to restrict access to administrative tasks via EWS and the Control Panel. This password is also required to associate a user with the Administrator role. In product documentation, it may also be referred to as the Local Device Administrator Password, Local Device Administrator Access Code, the Device Password, or the Administrator Password.

External Interface

A non-hardcopy interface where either the input is being received from outside the TOE or the output is delivered to a destination outside the TOE.

Hardcopy Device (HCD)

This term generically refers to the product models in this Security Target.

Near Field Communication (NFC)

Proximity (within a few inches) radio communication between two or more devices.

Shared-medium Interface

Mechanism for transmitting or receiving data that uses wired or wireless network or non-network electronic methods over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple users.

User Security Attributes

Defined by functional requirement FIA_ATD.1, every user is associated with one or more security attributes which allow the TOE to enforce its security functions on this user.

Wireless Direct Print

Feature that enables Wi-Fi capable devices (for example: smart phones, tablets, or computers) to establish a direct peer-to-peer wireless connection with the printer to submit print jobs.

8.3 References

CC Common Criteria for Information Technology Security Evaluation

Version 3.1R4

Date September 2012

Location <http://www.commoncriteriaportal.org/files/ccfiles/CCPART1V3.1R4.pdf>

Location <http://www.commoncriteriaportal.org/files/ccfiles/CCPART2V3.1R4.pdf>

Location <http://www.commoncriteriaportal.org/files/ccfiles/CCPART3V3.1R4.pdf>

FIPS197 Advanced Encryption Standard

Date 2001-11-26

Location <http://csrc.nist.gov/publications/fips/fips197/fips-197.pdf>

PKCS1v1.5 Public-Key Cryptography Standard (PKCS) #1: RSA Encryption Standard

Author(s) RSA Laboratories

Version 1.5

Date November 1993

PKCS5v2.1 PKCS #5 v2.1: Password-Based Cryptography Standard

Author(s) RSA Laboratories

Version 2.1

Author(s) RSA Laboratories

PP2600.1 IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A"

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-CPY SFR Package for Hardcopy Device Copy (CPY) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-DSR SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-FAX SFR Package for Hardcopy Device Document Fax (FAX) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-PRT SFR Package for Hardcopy Device Print (PRT) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-SCN SFR Package for Hardcopy Device Scan (SCN) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-SMI SFR Package for Hardcopy Device Shared-medium Interface (SMI) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

QuickSec51 QuickSec 5.1 Toolkit Reference Manual

Author(s) INSIDE Secure

Version 1.0

Date December 2009

RFC2104 HMAC: Keyed-Hashing for Message Authentication

Author(s) H. Krawczyk, M. Bellare, R. Canetti

Date 1997-02-01

Location <http://www.ietf.org/rfc/rfc2104.txt>

RFC2404 The Use of HMAC-SHA-1-96 within ESP and AH

Author(s) C. Madson, R. Glenn

Date 1998-11-01

Location <http://www.ietf.org/rfc/rfc2404.txt>

RFC4109 Algorithms for Internet Key Exchange version 1 (IKEv1)

Author(s) P. Hoffman

Date 2005-05-01

Location <http://www.ietf.org/rfc/rfc4109.txt>

RFC4301 Security Architecture for the Internet Protocol

Author(s) S. Kent, K. Seo

Date 2005-12-01

Location <http://www.ietf.org/rfc/rfc4301.txt>

RFC4303 IP Encapsulating Security Payload (ESP)

Author(s) S. Kent

Date 2005-12-01

Location <http://www.ietf.org/rfc/rfc4303.txt>

RFC4306 Internet Key Exchange (IKEv2) Protocol

Author(s) C. Kaufman

Date 2005-12-01

Location <http://www.ietf.org/rfc/rfc4306.txt>

RFC4718 IKEv2 Clarifications and Implementation Guidelines

Author(s) P. Eronen, P. Hoffman

Date 2006-10-01

Location <http://www.ietf.org/rfc/rfc4718.txt>

RFC4868 Using HMAC-SHA-256, HMAC-SHA-384, and HMAC-SHA-512 with IPsec

Author(s) S. Kelly, S. Frankel

Date 2007-05-01

Location <http://www.ietf.org/rfc/rfc4868.txt>

RFC4894 Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec

Author(s) P. Hoffman

Date 2007-05-01

Location <http://www.ietf.org/rfc/rfc4894.txt>

SP800-38A Recommendation for Block Cipher Modes of Operation: Methods and Techniques

Author(s) Morris Dworkin

Version NIST Special Publication 800-38A 2001 Edition

Date December 2001

Location <http://csrc.nist.gov/publications/nistpubs/800-38a/sp800-38a.pdf>

CCECG Common Criteria Evaluated Configuration Guide for HP Multifunction Printers

**HP LaserJet Enterprise MFP M631/M632/M633,
HP Color LaserJet Enterprise MFP M681/M682,
HP LaserJet Managed MFP E72525/E72530/E72535/
E82540/E82550/E82560/E62555/E62565/E62575,
HP Color LaserJet Managed MFP E77822/E77825/
E77830/E87640/E87650/E87660/E67550/E67560**

Author(s) HP Inc.

Version Edition 1, 3/2019

**E825_E876
-UG HP LaserJet Managed MFP E82540, HP LaserJet Managed MFP E82550, HP
LaserJet Managed MFP E82560, HP LaserJet Managed Flow MFP E82540, HP
LaserJet Managed Flow MFP E82550, HP LaserJet Managed Flow MFP E82560, HP
Color LaserJet Managed MFP E87640, HP Color LaserJet Managed MFP E87650, HP
Color LaserJet Managed MFP E87660, HP Color LaserJet Managed Flow MFP
E87640, HP Color LaserJet Managed Flow MFP E87650, HP Color LaserJet
Managed Flow MFP E87660**

User Guide

Author(s) HP Inc.

Version Edition 2, 4/2018

**E725_E778
-UG HP LaserJet Managed MFP E72525, HP LaserJet Managed MFP E72530, HP
LaserJet Managed MFP E72535, HP LaserJet Managed Flow MFP E72525, HP
LaserJet Managed Flow MFP E72530, HP LaserJet Managed Flow MFP E72535, HP
Color LaserJet Managed MFP E77822, HP Color LaserJet Managed MFP E77825, HP
Color LaserJet Managed MFP E77830, HP Color LaserJet Managed Flow MFP
E77822, HP Color LaserJet Managed Flow MFP E77825, HP Color LaserJet
Managed Flow MFP E77830**

User Guide

Author(s) HP Inc.

Version Edition 2, 4/2018

**M63_E625-
UG HP LaserJet Enterprise MFP M631, M632, M633**

User Guide

Authors HP Inc.

Version Edition 3, 10/2017

**M68_E675-
UG HP Color LaserJet Enterprise MFP M681, M682**

User Guide

Author(s) HP Inc.

Version Edition 1, 5/2017

**SP800-56A- Recommendation for Pair-Wise Key-Establishment Schemes Using Discrete
Rev3 Logarithm Cryptography**

Date 2018-04-16

Location <https://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-56Ar3.pdf>

FIPS186-2 Digital Signature Standard (DSS)

Date 2001-10-05

Location <https://csrc.nist.gov/CSRC/media/Publications/fips/186/2/archive/2001-10-05/documents/fips186-2-change1.pdf>

FIPS186-4 Digital Signature Standard (DSS)

Date 2013-07-19

Location <https://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.186-4.pdf>

**SP800-90A- Recommendation for Random Number Generation Using Deterministic Random Bit
Rev1 Generators**

Date June 2015

Location <https://nvlpubs.nist.gov/nistpubs/SpecialPublications/NIST.SP.800-90Ar1.pdf>

FIPS180-4 Secure Hash Standards (SHS)

Date August 2015

Location <https://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.180-4.pdf>

FIPS198-1 The Keyed-Hash Message Authentication Code (HMAC)

Date July 2008

Location <https://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.198-1.pdf>