



**Lexmark MX410, MX510, MX511, MX610,
MX611, MX710, MX711, XM1145, XM3150,
XM5163, XM5170, CX410, CX510 and Dell
B3465 and B5465 Multi-Function Printers
Security Target**

Version 1.5

December 15, 2015

Lexmark International, Inc.
740 New Circle Road
Lexington, KY 40550

DOCUMENT INTRODUCTION

Prepared By:

Common Criteria Consulting LLC
15804 Laughlin Lane
Silver Spring, MD 20906
<http://www.consulting-cc.com>

Prepared For:

Lexmark International, Inc.
740 New Circle Road
Lexington, KY 40550
<http://www.lexmark.com>

Various text from clauses 5, 7-9, and 12 reprinted with permission from IEEE, 445 Hoes Lane, Piscataway, New Jersey 08855, from IEEE "2600.1™-2009 Standard for a Protection Profile in Operational Environment A", Copyright © 2009 IEEE. All rights reserved.

REVISION HISTORY

<u>Rev</u>	<u>Description</u>
1.0	April 30, 2015, initial release
1.1	May 22, 2015, addressed lab comments
1.2	June 26, 2015, Addressed lab ORs for comparable HD evaluation
1.3	November 6, 2015, Updated security claims
1.4	December 5, 2015, Corrected a guidance document name
1.5	December 15, 2015, Modified SMTP credential requirements

TABLE OF CONTENTS

1. SECURITY TARGET INTRODUCTION.....	9
1.1 Security Target Reference.....	9
1.2 TOE Reference	9
1.3 Evaluation Assurance Level.....	9
1.4 Keywords	9
1.5 TOE Overview.....	9
1.5.1 Usage and Major Security Features	9
1.5.2 TOE type.....	10
1.5.3 Required Non-TOE Hardware/Software/Firmware	10
1.6 TOE Description	10
1.6.1 Users	12
1.6.2 Objects (Assets)	13
1.6.2.1 User Data	13
1.6.2.2 TSF Data	14
1.6.2.3 Functions.....	14
1.6.3 Operations	15
1.6.4 Channels.....	15
1.7 Physical Boundary	15
1.8 Logical Boundary.....	16
1.8.1 Audit Generation.....	16
1.8.2 Identification and Authentication	16
1.8.3 Access Control	16
1.8.4 Management.....	16
1.8.5 Fax Separation	16
1.8.6 D.DOC Wiping	16
1.8.7 Secure Communication.....	16
1.8.8 Self Test	16
1.9 TOE Data.....	16
1.9.1 TSF Data	16
1.9.2 Authentication Data	19
1.9.3 Security Attributes	20
1.9.4 User Data	20
1.10 Evaluated Configuration	20
2. CONFORMANCE CLAIMS	24
2.1 Common Criteria Conformance.....	24
2.2 Protection Profile Conformance.....	24
2.3 Security Requirement Package Conformance	24
3. SECURITY PROBLEM DEFINITION	25
3.1 Introduction.....	25
3.2 Assumptions.....	25
3.3 Threats	25
3.4 Organisational Security Policies	26
4. SECURITY OBJECTIVES.....	27
4.1 Security Objectives for the TOE	27

4.2 Security Objectives for the Operational Environment..... 27

5. EXTENDED COMPONENTS DEFINITION 29

5.1 Extended Security Functional Components 29

5.1.1 FPT_FDI_EXP Restricted forwarding of data to external interfaces 29

FPT_FDI_EXP.1..... 30

5.2 Extended Security Assurance Components..... 30

6. SECURITY REQUIREMENTS..... 31

6.1 TOE Security Functional Requirements 31

6.1.1 Security Audit (FAU) 31

6.1.1.1 FAU_GEN.1 Audit Data Generation..... 31

6.1.1.2 FAU_GEN.2 User Identity Association 33

6.1.2 Cryptographic Support (FCS)..... 33

6.1.2.1 FCS_CKM.1 Cryptographic Key Generation..... 33

6.1.2.2 FCS_CKM.4 Cryptographic Key Destruction..... 33

6.1.2.3 FCS_COP.1 Cryptographic Operation 33

6.1.3 User Data Protection (FDP) 33

6.1.3.1 FDP_ACC.1 Subset Access Control..... 33

6.1.3.2 FDP_ACF.1 Security Attribute Based Access Control 34

6.1.3.3 FDP_RIP.1 Subset Residual Information Protection..... 36

6.1.4 Identification and Authentication (FIA) 36

6.1.4.1 FIA_AFL.1 Authentication Failure Handling..... 36

6.1.4.2 FIA_ATD.1 User Attribute Definition 36

6.1.4.3 FIA_UAU.1 Timing of Authentication..... 36

6.1.4.4 FIA_UAU.7 Protected Authentication Feedback 37

6.1.4.5 FIA_UID.1 Timing of Identification 37

6.1.4.6 FIA_USB.1 User-Subject Binding 37

6.1.5 Security Management (FMT) 38

6.1.5.1 FMT_MSA.1 Management of Security Attributes 38

6.1.5.2 FMT_MSA.3 Static Attribute Initialisation..... 38

6.1.5.3 FMT_MTD.1 Management of TSF Data..... 38

6.1.5.4 FMT_SMF.1 Specification of Management Functions 40

6.1.5.5 FMT_SMR.1 Security Roles 40

6.1.6 Protection of the TSF (FPT) 41

6.1.6.1 FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces 41

6.1.6.2 FPT_STM.1 Reliable Time Stamps..... 41

6.1.6.3 FPT_TST.1 TSF Testing..... 41

6.1.7 TOE Access (FTA) 41

6.1.7.1 FTA_SSL.3 TSF-Initiated Termination..... 41

6.1.8 Trusted Path/Channels (FTP)..... 42

6.1.8.1 FTP_ITC.1 Inter-TSF Trusted Channel..... 42

6.2 TOE Security Assurance Requirements 42

6.3 CC Component Hierarchies and Dependencies 42

7. TOE SUMMARY SPECIFICATION 44

7.1 Security Functions 44

7.1.1 Audit Generation..... 44

7.1.2 Identification and Authentication	45
7.1.2.1 Backup Password	46
7.1.2.2 Active Directory.....	46
7.1.3 Access Control.....	47
7.1.3.1 Internal Account Building Blocks	50
7.1.3.2 LDAP+GSSAPI and Smart Card Authentication Client Building Blocks	50
7.1.3.3 Common Processing	50
7.1.3.4 Function Access Control.....	51
7.1.3.5 Postscript Access Control	53
7.1.4 Management.....	53
7.1.4.1 Reports Menu.....	53
7.1.4.2 Network/Ports Menu	53
7.1.4.3 Security Menu	53
7.1.4.4 Settings Menu	56
7.1.4.5 Security Reset Jumper.....	57
7.1.5 Fax Separation	58
7.1.6 D.DOC Wiping	59
7.1.7 Secure Communications	59
7.1.8 Self Test	59
7.1.9 Deviations From Allowed Cryptographic Standards	59
8. PROTECTION PROFILE CLAIMS.....	61
8.1 TOE Type Consistency	61
8.2 Security Problem Definition Consistency	61
8.3 Security Objectives Consistency	61
8.4 Security Functional Requirements Consistency	61
8.5 Security Assurance Requirements Consistency	62
9. RATIONALE	63
9.1 Rationale for IT Security Objectives.....	63
9.1.1 Rationale Showing Threats to Security Objectives	63
9.1.2 Rationale Showing Policies to Security Objectives.....	64
9.1.3 Rationale Showing Assumptions to Environment Security Objectives.....	65
9.2 Security Requirements Rationale.....	66
9.2.1 Rationale for Security Functional Requirements of the TOE Objectives.....	66
9.2.2 Security Assurance Requirements Rationale	69
9.3 TOE Summary Specification Rationale.....	70

LIST OF FIGURES

Figure 1 - TOE Model 12

LIST OF TABLES

Table 1 - Technical Characteristics of the MFP Models 11

Table 2 - Notational prefix conventions 12

Table 3 - Users 13

Table 4 - User Data 13

Table 5 - TSF Data 14

Table 6 - Functions 14

Table 7 - TSF Data 16

Table 8 - Authentication Data 19

Table 9 - Security Attributes 20

Table 10 - User Data 20

Table 11 - Source-Destination Combinations 23

Table 12 - Assumptions 25

Table 13 - Threats 26

Table 14 - Organizational Security Policies for the TOE 26

Table 15 - Security Objectives for the TOE 27

Table 16 - Security Objectives of the Operational Environment 27

Table 17 - Audit data requirements 31

Table 18 - Cryptographic Operations 33

Table 19 - Common Access Control SFP Rules 34

Table 20 - TSF Data 38

Table 21 - FMT_SMR.1 Detail 40

Table 22 - EAL3+ Assurance Requirements 42

Table 23 - TOE SFR Dependency Rationale 43

Table 24 - Access Control Items 47

Table 25 - TOE Function Access Control SFP Rules 51

Table 26 - Network/Ports Menu TSF Data 53

Table 27 - Security Menu TSF Data 54

Table 28 - General Settings Menu TSF Data 56

Table 29 - Fax Settings Menu TSF Data 56

Table 30 - Email Settings Menu TSF Data 57

Table 31 - Print Settings/Setup Settings Menu TSF Data 57

Table 32 - Threats, Policies and Assumptions to Security Objectives Mapping 63

Table 33 - Threats to Security Objectives Rationale..... 64

Table 34 - Policies to Security Objectives Rationale 65

Table 35 - Assumptions to Security Objectives Rationale..... 65

Table 36 - SFRs to Security Objectives Mapping 66

Table 37 - Security Objectives to SFR Rationale..... 67

Table 38 - SFRs to TOE Security Functions Mapping 70

Table 39 - SFR to SF Rationale..... 71

ACRONYMS LIST

AD..... Active Directory

AES..... Advanced Encryption Standard

AIO..... All In One

BSD..... Berkeley Software Distribution

CAC..... Common Access Card

CAVP..... Cryptographic Algorithm Validation Program

CC..... Common Criteria

CM..... Configuration Management

EAL..... Evaluation Assurance Level

ESP..... Encapsulating Security Payload

FTP..... File Transfer Protocol

GSSAPI..... Generic Security Services Application Program Interface

HTTP..... HyperText Transfer Protocol

I&A..... Identification & Authentication

IPP..... Internet Printing Protocol

IPSec..... Internet Protocol Security

IPv4..... Internet Protocol version 4

IPv6..... Internet Protocol version 6

ISO..... International Standards Organization

IT..... Information Technology

KDC..... Key Distribution Center

KDF..... Key Derivation Function

LAN..... Local Area Network

LDAP..... Lightweight Directory Access Protocol

MB..... MegaByte

MFD..... Multi-Function Device

MFP	Multi-Function Printer
NTP	Network Time Protocol
OSP	Organizational Security Policy
PIV	Personal Identity Verification
PJL	Printer Job Language
PP	Protection Profile
RFC	Request For Comments
SASL	Simple Authentication and Security Layer
SFP	Security Function Policy
SFR	Security Functional Requirement
SMTP	Simple Mail Transport Protocol
SNMP	Simple Network Management Protocol
ST	Security Target
TFTP	Trivial File Transfer Protocol
TOE	Target of Evaluation
TSF	TOE Security Function
UI	User Interface
URL	Uniform Resource Locator
USB	Universal Serial Bus

1. Security Target Introduction

This Security Target (ST) describes the objectives, requirements and rationale for the Lexmark MX410, MX510, MX511, MX610, MX611, MX710, MX711, XM1145, XM3150, XM5163, XM5170, CX410, CX510 and Dell B3465 and B5465 Multi-Function Printers. The language used in this Security Target is consistent with the *Common Criteria for Information Technology Security Evaluation, Version 3.1 Revision 4*. As such, the spelling of terms is presented using the internationally accepted English.

1.1 Security Target Reference

Lexmark MX410, MX510, MX511, MX610, MX611, MX710, MX711, XM1145, XM3150, XM5163, XM5170, CX410, CX510 and Dell B3465 and B5465 Multi-Function Printers Security Target, version 1.5, December 15, 2015.

1.2 TOE Reference

Lexmark Firmware versions:

- LW50.SB4.P555: MX410, MX510, MX511, XM1145
- LW50.SB7.P555: MX610, MX611, XM3150, Dell B3465
- LW50.TU.P555: MX710, MX711, XM5163, XM5170, Dell B5465
- LW50.GM4.P555: CX410
- LW50.GM7.P555: CX510

1.3 Evaluation Assurance Level

Assurance claims conform to EAL3 (Evaluation Assurance Level 3) augmented with ALC_FLR.2 from the *Common Criteria for Information Technology Security Evaluation, Version 3.1 Revision 4*.

1.4 Keywords

Hardcopy, Paper, Document, Printer, Scanner, Copier, Facsimile, Fax, Document Server, Document Storage and Retrieval, Nonvolatile storage, Residual data, Temporary data, Network interface, Shared communications medium, Multifunction Device, Multifunction Product, All-In-One, MFD, MFP

1.5 TOE Overview

1.5.1 Usage and Major Security Features

The MFPs are multi-functional printer systems with scanning, fax, and networked capabilities. Their capabilities extend to walk-up scanning and copying, scanning to fax, scanning to email, and servicing print jobs through the network. The MFPs feature an integrated touch-sensitive operator panel.

The major security features of the TOE are:

1. All Users are identified and authenticated as well as authorized before being granted permission to perform any restricted TOE functions.
2. Administrators authorize Users to use the functions of the TOE.
3. User Document Data are protected from unauthorized disclosure or alteration.

4. User Function Data are protected from unauthorized alteration.
5. TSF Data, of which unauthorized disclosure threatens operational security, are protected from unauthorized disclosure.
6. TSF Data, of which unauthorized alteration threatens operational security, are protected from unauthorized alteration.
7. Document processing and security-relevant system events are recorded, and such records are protected from disclosure or alteration by anyone except for authorized personnel.

1.5.2 TOE type

The firmware of a Multi-Function Device

1.5.3 Required Non-TOE Hardware/Software/Firmware

The TOE is the firmware of an MFP. The MFP hardware must be one of the models supported for the firmware versions specified for the TOE. To be fully operational, any combination of the following items may be connected to the MFP:

1. A LAN for network connectivity. The TOE supports IPv4 and IPv6.
2. A telephone line for fax capability.
3. IT systems that submit print jobs to the MFP via the network using standard print protocols.
4. IT systems that send and/or receive faxes via the telephone line.
5. An IT system acting as the remote syslog recipient of audit event records sent from the TOE.
6. LDAP server to support Identification and Authentication (I&A). This component is optional depending on the type(s) of I&A mechanisms used.
7. Card reader and cards to support Smart Card authentication using Common Access Card (CAC) or Personal Identity Verification (PIV) cards. This component is optional depending on the type(s) of I&A mechanisms used. The supported card readers are:
 - a. Omnikey 3121 SmartCard Reader,
 - b. Any other Omnikey SmartCard Readers that share the same USB Vendor IDs and Product IDs with the above readers (example Omnikey 3021),
 - c. SCM SCR 331,
 - d. SCM SCR 3310v2.

1.6 TOE Description

The TOE provides the following functions related to MFPs:

1. Printing – producing a hardcopy document from its electronic form
2. Scanning – producing an electronic document from its hardcopy form
3. Copying – duplicating a hardcopy document

4. Faxing – scanning documents in hardcopy form and transmitting them in electronic form over telephone lines, and receiving documents in electronic form over telephone lines and printing them in hardcopy form

All of the MFP models referenced in the evaluation are complete MFPs in a single unit.


All of the firmware versions included in this evaluation provide the same security functionality. Their differences are in the processor boards and the size of the display included in the associated MFP model. The differences in the processor boards accommodate differences in the speed of printing and support for color operations. The following tables summarize the technical characteristics of the MFP models.

Table 1 - Technical Characteristics of the MFP Models

Model	Processor	Color/Mono	Pages Per Minute
MX410	ARM v7 800 MHz	Mono	40
MX510	ARM v7 800 MHz	Mono	45
MX511	ARM v7 800 MHz	Mono	45
MX610	ARM v7 800 MHz	Mono	50
MX611	ARM v7 800 MHz	Mono	50
MX710	ARM v7 800 MHz	Mono	63
MX711	ARM v7 800 MHz	Mono	70
XM1145	ARM v7 800 MHz	Mono	45
XM3150	ARM v7 800 MHz	Mono	50
XM5163	ARM v7 800 MHz	Mono	63
XM5170	ARM v7 800 MHz	Mono	70
CX410	ARM v7 800 MHz	Color	32
CX510	ARM v7 800 MHz	Color	32
B3465	ARM v7 800 MHz	Mono	50
B5465	ARM v7 800 MHz	Mono	70

The Target of Evaluation (TOE) is described using the standard Common Criteria terminology of Users, Objects, Operations, and Interfaces. Two additional terms are introduced: Channel describes both data interfaces and hardcopy document input/output mechanisms, and TOE Owner is a person or organizational entity responsible for protecting TOE assets and establishing related security policies. In this document, the terms User and Subject are used interchangeably.

Figure 1 - TOE Model

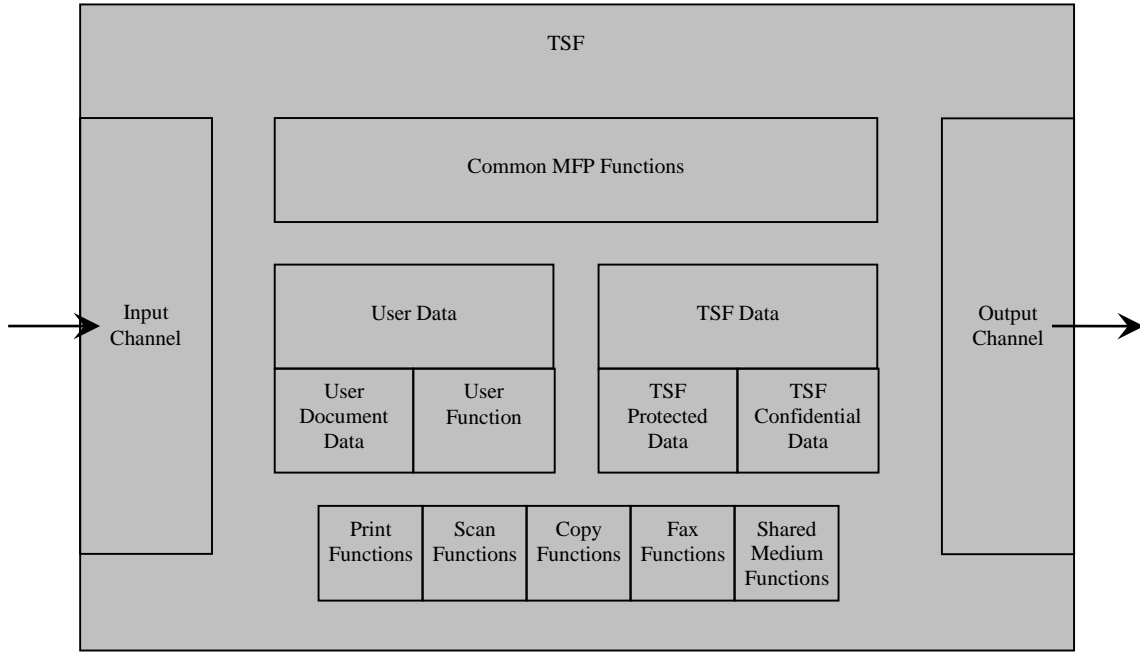

The following prefixes are used to indicate different entity types:

Table 2 - Notational prefix conventions

Prefix	Type of entity
U.	User
D.	Data
F.	Function
T.	Threat
P.	Policy
A.	Assumption
O.	Objective
OE.	Environmental objective
+	Security Attribute

1.6.1 Users

Users are entities that are external to the TOE and which interact with the TOE. There may be two types of Users: Normal and Administrator.

Table 3 - Users

Designation	Definition
U.USER	Any authorized User.
U.NORMAL	<p>A User who is authorized to perform User Document Data processing functions of the TOE.</p> <p>In the remainder of this document, the term “Normal User” is used interchangeably with U.NORMAL.</p> <p>The TOE provides user-level permissions to access specific document processing functions (e.g. print, copy). When it is necessary to distinguish the specific permission, that information is supplied. Otherwise the generic terms identified above are used.</p>
U.ADMINISTRATOR	<p>A User who has been specifically granted the authority to manage some portion or all of the TOE and whose actions may affect the TOE security policy (TSP).</p> <p>In the remainder of this document, the terms “Administrator” and “Authorized Administrator” are used interchangeably with U.ADMINISTRATOR.</p> <p>The TOE provides user-level permissions to access specific management functions. When it is necessary to distinguish the specific permission, that information is supplied. Otherwise the generic terms identified above are used.</p>

1.6.2 Objects (Assets)

Objects are passive entities in the TOE, that contain or receive information, and upon which Subjects perform Operations. Objects are equivalent to TOE Assets. There are three categories of Objects: User Data, TSF Data, and Functions.

1.6.2.1 User Data

User Data are data created by and for Users and do not affect the operation of the TOE Security Functionality (TSF). This type of data is composed of two types of objects: User Document Data, and User Function Data.

Table 4 - User Data

Designation	Definition
D.DOC	<p>User Document Data consists of the information contained in a user’s document. This includes the original document itself in either hardcopy or electronic form, image data, or residually-stored data created by the hardcopy device in RAM while processing an original document and printed hardcopy output.</p> <p>For this TOE, D.DOC includes:</p> <ol style="list-style-type: none"> 1. User data contained in jobs submitted from the network for printing 2. Scanned data to be printed (copying) 3. Scanned data to be faxed 4. Scanned data to be emailed 5. User data in received faxes

Designation	Definition
D.FUNC	User Function Data are the information about a user's document or job to be processed by the TOE. For this TOE, D.FUNC includes: <ol style="list-style-type: none"> 1. Job information for network print jobs 2. Job information for scanned data to be printed (copying) 3. Job information for scanned data to be faxed 4. Job information for scanned data to be emailed 5. Job information for user data in received faxes

1.6.2.2 TSF Data

TSF Data are data created by and for the TOE and that might affect the operation of the TOE. This type of data is composed of two types of objects: TSF Protected Data and TSF Confidential Data.

Table 5 - TSF Data

Designation	Definition
D.PROT	TSF Protected Data are assets for which alteration by a User who is neither an Administrator nor the owner of the data would have an effect on the operational security of the TOE, but for which disclosure is acceptable.
D.CONF	TSF Confidential Data are assets for which either disclosure or alteration by a User who is neither an Administrator nor the owner of the data would have an effect on the operational security of the TOE.

1.6.2.3 Functions

Functions perform processing, storage, and transmission of data that may be present in the TOE. These functions are described in the following table.

Table 6 - Functions

Designation	Definition
F.PRT	Printing: a function in which electronic document input is converted to physical document output
F.SCN	Scanning: a function in which physical document input is converted to electronic document output
F.CPY	Copying: a function in which physical document input is duplicated to physical document output
F.FAX	Faxing: a function in which physical document input is converted to a telephone-based document facsimile (fax) transmission, and a function in which a telephone-based document facsimile (fax) reception is converted to physical document output
F.SMI	Shared-medium interface: a function that transmits or receives User Data or TSF Data over a communications medium which is or can be shared by other users, such as wired or wireless network media and most radio-frequency wireless media

1.6.3 Operations

Operations are a specific type of action performed by a Subject on an Object. Five types of operations are addressed: those that result in disclosure of information (Read), those that result in alteration of information (Create, Modify, Delete), and those that invoke a function (Execute).

1.6.4 Channels

Channels are the mechanisms through which data can be transferred into and out of the TOE.

Private Medium Interface: mechanism for exchanging information that use (1) wired electronic methods over a communications medium which, in conventional practice, is not accessed by multiple simultaneous Users; or, (2) Operator Panel and displays that are part of the TOE. It is an input-output channel. The touch panel and phone line are private medium interfaces.

Shared-medium Interface: mechanism for exchanging information that use wired network electronic methods over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple Users. It is an input-output channel. The standard network interface is a shared-medium interface.

Original Document Handler: mechanism for transferring User Document Data in hardcopy form into the TOE. It is an input channel. The scanner is an original document handler.

Hardcopy Output Handler: mechanism for transferring User Document Data out of the TOE in hardcopy form. It is an output channel. The printer is a hardcopy output handler.

1.7 Physical Boundary

The physical boundary of the TOE is the firmware executing on the Main Processor Board of the MFP. The hardware of the MFP is excluded from the TOE boundary.

The physical scope of the TOE also includes the following guidance documentation:

1. *Lexmark Common Criteria Installation Supplement and Administrator Guide*
2. *Dell Common Criteria Installation Supplement and Administrator Guide*
3. *Lexmark Embedded Web Server – Security Administrator's Guide*
4. *Dell Embedded Web Server – Security Administrator's Guide*
5. *Lexmark MX410 and MX510 Series User's Guide*
6. *Lexmark MX610 Series User's Guide*
7. *Lexmark MX710 Series User's Guide*
8. *Lexmark XM1100 Series User's Guide*
9. *Lexmark XM3150 User's Guide*
10. *Lexmark XM5100 Series User's Guide*
11. *Lexmark CX410 Series User's Guide*
12. *Lexmark CX510 Series User's Guide*
13. *Dell B3465dn-dnf Laser MFP User's Guide*
14. *Dell B5465dnf Laser MFP User's Guide*

1.8 Logical Boundary

The TOE supports the security functions documented in the following sections.

1.8.1 Audit Generation

The TOE generates audit event records for security-relevant events and transmits them to a remote IT system using the syslog protocol.

1.8.2 Identification and Authentication

The TOE supports I&A with a per-user selection of internal accounts (processed by the TOE) or integration with an external LDAP server (in the operational environment). Smart Card authentication may also be specified for users of the touch panel. A Backup Password mechanism may also be enabled.

1.8.3 Access Control

Access controls configured for functions (e.g. fax usage) and menu access are enforced by the TOE.

1.8.4 Management

Through web browser sessions, authorized administrators may configure access controls and perform other TOE management functions.

1.8.5 Fax Separation

The TOE ensures that only fax traffic is sent or received via the attached phone line. Incoming traffic is processed as fax data only; no management access or other data access is permitted. In the evaluated configuration, the only source for outgoing faxes is the scanner.

1.8.6 D.DOC Wiping

In the evaluated configuration, the TOE automatically overwrites RAM used to store user data as soon as the buffer is released.

1.8.7 Secure Communication

The TOE protects the confidentiality and integrity of all information exchanged over the attached network by using IPSec with ESP for all network communication.

1.8.8 Self Test

During initial start-up, the TOE performs self tests on its hardware components and the integrity of the building blocks and security templates.

1.9 TOE Data

1.9.1 TSF Data

Table 7 - TSF Data

Item	Description	D.CONF	D.PROT
Access Control Authorizations	Access control authorizations specify the restrictions on menus or functions. Items may be configured for no security (accessible to everyone), disabled (not accessible), or restricted by a specified security template.	X	

Lexmark Multi-Function Printers without Hard Drives Security Target

Item	Description	D.CONF	D.PROT
Account Status	Login status information is associated with all accounts used to authenticate against a building block. For each building block and account, the TOE tracks the number of login failures, time of the earliest login failure, and lock status.	X	
Active Directory Configuration	Configuration information used to join an Active Directory Domain. Once joined, machine credentials are generated and the LDAP+GSSAPI Building Block parameters for communication with the Domain Controller are automatically populated.	X	
Analog Fax - Cancel Faxes	Specifies whether pending faxes can be canceled by users.		X
Analog Fax - Driver to fax	Specifies whether driver fax jobs are treated as PS jobs and printed or sent as faxes.		X
Analog Fax - Enable Fax Receive	Specifies whether incoming faxes may be received.		X
Analog Fax - Fax Forwarding	Specifies whether fax forwarding of incoming faxes to a destination other than the printer is enabled.		X
Analog Fax - Holding Faxes	Defines conditions for holding incoming faxes.		X
Date and Time Parameters	Controls whether the time is tracked internally or from a remote NTP server. If an NTP server is used, it specifies the parameters for communication with the server.		X
E-mail images sent as	Specifies whether images forwarded via SMTP are sent as an attachment or FTP'd to a file system and sent as a URL.		X
Enable Audit	Determines if the device records events in the secure audit log and (if enabled) in the remote syslog.		X
Enable Fax Scans	Specifies whether users can create faxes with the device's scanner.		X
Enable FTP/TFTP	Enables FTP/TFTP server on the TOE.		X
Enable HTTP Server	Enables HTTP(S) server on the TOE.		X
Enable Remote Syslog	Determines if the device transmits logged events to a remote server.		X
Fax Mode	Specifies whether the fax function is operating in Analog mode or as a Fax Server (outgoing faxes are forwarded to a fax server via SMTP).		X
Fax Server - Enable Analog Receive	This parameter controls whether incoming faxes are supported when operating in fax server mode		X
Held Print Job Expiration Timer	Specifies the amount of time a received print job is saved for a user to release before it is automatically deleted.		X
Internal Account Building Blocks	The building blocks specify Internal Accounts as the mechanism to be used for I&A or authorizations and specify memberships.	X	
Internal Account Groups	The set of Internal Account Groups may be used to configure group membership for Internal Accounts and authorizations for access controls using Internal Accounts.	X	
IPSec Settings	The configuration parameters for IPSec that require IPSec with ESP for all network communication (IPv4 and/or IPv6) with certificate validation.		X

Lexmark Multi-Function Printers without Hard Drives Security Target

Item	Description	D.CONF	D.PROT
Internal Accounts Required User Credentials	Specifies whether Internal Accounts use username and password or just username for the I&A process.		X
Job Waiting	Specifies whether a print job may be placed in the Held Jobs queue if the required resources (e.g. paper type) are not currently available, enabling subsequent print jobs to be processed immediately		X
LDAP Certificate Verification	Specifies what verification (if any) should be done on the certificate sent by an LDAP server. Demand specifies that the server certificate is requested; if no certificate is provided or if a bad certificate is provided, the session is terminated immediately. Try indicates the server certificate is requested; if no certificate is provided, the session proceeds normally. If a bad certificate is provided, the session is terminated immediately. Allow indicates the server certificate is requested; if no certificate is provided, the session proceeds normally. If a bad certificate is provided, it will be ignored and the session proceeds normally.		X
LDAP+GSSAPI – Certificate	Specifies whether the default certificate or a specific certificate is required when communicating with an LDAP server.		X
LDAP+GSSAPI – MFP Credentials	Specifies the Username and password to be used when performing LDAP queries.	X	
LDAP+GSSAPI Building Blocks	The building blocks specify LDAP+GSSAPI as the mechanism to be used for I&A or authorizations and specify parameters for retrieving information from an LDAP server (e.g. group names to check, search base, required object names).	X	
LES Applications	Specifies whether enhanced service Java applications may be executed on the TOE. This parameter must be set to “Enable” during installation and is not accessible to administrators during operation.		X
Login Restrictions	Determines how many failed authentications are allowed within the “Failure time frame” value before the offending User Name is prevented from accessing any function protected with the same building block for the duration of the “Lockout time” value. The “Panel Login Timeout” determines how long the operator panel can remain idle on the Home screen before the user is logged off automatically. The “Remote Login Timeout” determines how long web browser sessions can remain idle before the user is logged off automatically.	X	
Network Port	Defines the parameters required for the TOE to communicate via the standard network port		X
Remote Syslog Parameters	Defines the communication to the remote syslog system	X	

Item	Description	D.CONF	D.PROT
Security Reset Jumper	Specifies the behavior of the TOE when a position change of the Security Rest Jumper is detected. No Effect indicates the jumper should be ignored. “No Security” preserves all of the building blocks and templates that a user has defined, but resets each access control to its factory default security level. “Reset to Defaults” deletes all building blocks and templates and resets each access control to its factory default security level.		X
Security Templates	Security Templates are used to configure access controls for restricted functions and menus. Each security template specifies 2 building blocks – one for authentication and one for authorization. The 2 building blocks may be the same. The security template also specifies a set of groups that are authorized to access the associated function or menu.	X	
Simple Kerberos Setup	Defines the KDC Address, KDC Port, and Realm for communication with the KDC. KDC communication is required if the TOE is using the LDAP+GSSAPI mechanism.	X	
Smart Card Authentication Client Building Block	The building block specifies Smart Card Authentication Client as the mechanism to be used for I&A or authorizations and specifies parameters for validating the certificate from the card and retrieving information from Active Directory.	X	
SMTP Setup Settings	Define the SMTP server to be used to send email from the TOE		X
SMTP Setup Settings - User-Initiated E-mail	Specifies what credentials (if any) are used to authenticate with an external SMTP server.	X	
Touch Panel Menu Display - FTP	Specifies whether or not the FTP icon should be displayed on the touch panel menu.		X
Touch Panel Menu Display - FTP shortcuts	Specifies whether or not the FTP shortcuts icon should be displayed on the touch panel menu.		X
Touch Panel Menu Display - USB Drive	Specifies whether or not the USB Drive icon should be displayed on the touch panel menu.		X
USB Buffer	Disables all activity via the USB device ports.		X
Use Backup Password	Enables access to the Security Menu via the Backup Password	X	

1.9.2 Authentication Data

All the items described in the following table are D.CONF.

Table 8 - Authentication Data

Item	Description
Backup Password	The Backup Password mechanism allows an administrator to access the Security Menu via a web browser session, regardless of the access controls configured for it.

Item	Description
Internal Account Usernames and Passwords	Internal Accounts are used in conjunction with the Internal Account authentication and authorization mechanism. The username and password for each defined account are used with Internal Account authentication.

1.9.3 Security Attributes

All the items described in the following table are D.CONF.

Table 9 - Security Attributes

Item	Description
Group Memberships	The set of group memberships associated with the current session as the result of successful I&A.
Username	The username specified during a successful I&A interaction.

1.9.4 User Data

All the items described in the following table have both a D.DOC and D.FUNC component.

Table 10 - User Data

Item	Description
Copy Job	Data input to the TOE via the scanner and destined for the printer.
Held Faxes	Data received via the fax interface and held until released by an authorized administrator.
Held Jobs	Data received via the network interface that is destined for the printer and held until released at the touch panel by the submitter.
Incoming Fax Job	Data received via the fax interface and destined for the printer.
Network Print Job	Data received via the network interface and destined for the printer. All network print jobs are held until released.
Scanned Job to be Emailed	Data input to the TOE via the scanner and destined for the SMTP server specified by an authorized administrator.
Scanned Job to be Faxed	Data input to the TOE via the scanner and queued for transmission as a fax via the phone line.

1.10 Evaluated Configuration

The following configuration options apply to the evaluated configuration of the TOE:

1. No optional network interfaces are installed on the MFPs.
2. No optional parallel or serial interfaces are installed on the MFPs. These are for legacy connections to specific IT systems only.
3. All USB ports on the MFPs that perform document processing functions are disabled via configuration. In the operational environments in which the Common Criteria evaluated configuration is of interest, the users typically require that all USB ports are disabled. If Smart Card authentication is used, a card reader is physically connected to a specific USB port during TOE installation; in the evaluated configuration this USB port is limited

- in functionality to acting as the interface to the card reader. A reader is shipped with the MFP. If Smart card authentication is not used, the card reader may be left unconnected.
4. Operational management functions are performed via browser sessions to the embedded web server or via the management menus available through the touch panel.
 5. Access controls are configured for all TSF data so that only authorized administrators are permitted to manage those parameters.
 6. All network communication is required to use IPsec with ESP to protect the confidentiality and integrity of the information exchanged, including management sessions that exchange D.CONF and D.PROT. Certificates presented by remote IT systems are validated.
 7. Because all network traffic is required to use IPsec with ESP, syslog records sent to a remote IT system also are protected by IPsec with ESP. This is beyond IEEE Std. 2600.1™-2009 requirements for transmission of audit records.
 8. Support for AppleTalk is disabled since it does not provide confidentiality and integrity protection.
 9. I&A may use Internal Accounts and/or LDAP+GSSAPI on a per-user basis. The Backup Password mechanism may be enabled at the discretion of the administrators. Smart Card authentication may be used for touch panel users. No other I&A mechanisms are included in the evaluation because they provide significantly lower strength than the supported mechanisms.
 10. LDAP+GSSAPI and Smart Card authentication require integration with an external LDAP server such as Active Directory. This communication uses default certificates stored in NVRAM; the LDAP server must provide a valid certificate to the TOE. Binds to LDAP servers for LDAP+GSSAPI use device credentials (not anonymous bind) so that the information retrieved from Active Directory can be restricted to a specific MFP. Binds to LDAP servers for Smart Card authentication use user credentials from the card (not anonymous bind) so that the information retrieved from Active Directory can be restricted to a specific user.
 11. Internal Accounts require User ID and password (rather than just User ID).
 12. Audit event records are transmitted to a remote IT system as they are generated using the syslog protocol.
 13. User data sent by the MFP in email messages is sent as an attachment (not as a web link).
 14. No Java applications are loaded into the MFP by Administrators. These applications are referred to as eSF applications in end user documentation. The following eSF applications are installed by Lexmark before the TOE is shipped and must be enabled: “eSF Security Manager” (Lexmark models only) or “Application Access Manager” (Dell models only); “Smart Card Authentication”; and “Secure Held Print Jobs” (Lexmark models only) or “Secure Print Jobs Release” (Dell models only). Note that the “Secure Held Print Jobs” and “Secure Print Jobs Release” applications differ in name only; the same is true for the “eSF Security Manager” or “Application Access Manager”.

15. The following eSF applications are installed by Lexmark before the TOE is shipped and must be enabled if smart card authentication is used: “Smart Card Authentication Client”, “PIV Smart Card Driver (if PIV cards are used)”, “CAC Smart Card Driver (if CAC cards are used)”, and “Background and Idle Screen”.
16. All other eSF applications installed by Lexmark before the TOE is shipped must be disabled.
17. No option card for downloadable emulators is installed in the TOE.
18. Incoming faxes are always held until released by an authorized administrator.
19. Credentials (device or user) for authentication to the SMTP server are optional.
20. Fax forwarding is disabled to limit the destinations for incoming faxes to the local printer only.
21. NPAP, PJP and Postscript have the ability to modify system settings. The capabilities specific to modifying system settings via these protocols are disabled.
22. All administrators must be authorized for all of the document processing functions (print, copy, scan, fax).
23. All network print jobs are held until released via the touch panel. Every network print job must include a PJP SET USERNAME statement to identify the userid of the owner of the print job. Held print jobs may only be released by an authenticated user with the same userid as specified in the print job.
24. All incoming fax jobs are held until released via the touch panel. Held print jobs may only be released by an authenticated user with the U.ADMINISTRATOR role.
25. Administrators are directed (through operational guidance) to specify passwords adhering to the following composition rules for Internal Accounts and the Backup Password:
 - A minimum of 8 characters
 - At least one lower case letter, one upper case letter, and one non-alphabetic character
 - No dictionary words or permutations of the user name
26. Simple Network Management Protocol (SNMP) support is disabled.
27. Internet Printing Protocol (IPP) support is disabled.
28. All unnecessary network ports are disabled.

The following table defines the combinations of possible input sources and destinations that are included in the evaluated configuration. In the table, the following meanings are used:

- “May Be Disabled Or Restricted” indicates that the functionality is included in the evaluation but may be disabled or restricted to an authorized set of users at the discretion of an administrator
- “Disabled” indicates the functionality exists within the TOE but is always disabled by an administrator for the evaluated configuration

- “n/a” indicates the functionality does not exist in the TOE

Table 11 - Source-Destination Combinations

Source Destination	Print Protocols (via the Network Interface)	Scanner	Incoming Fax
Printer	May Be Disabled Or Restricted	May Be Disabled Or Restricted	May Be Disabled Or Restricted
Outgoing Fax	Disabled	May Be Disabled Or Restricted	Disabled
Email (via the Network Interface)	n/a	May Be Disabled Or Restricted	Disabled
FTP (via the Network Interface)	n/a	Disabled	Disabled

2. Conformance Claims

2.1 Common Criteria Conformance

Common Criteria version: Version 3.1 Revision 4

Common Criteria conformance: Part 2 extended and Part 3 conformant

2.2 Protection Profile Conformance

PP Identification: 2600.1, Protection Profile for Hardcopy Devices, Operational Environment A, version 1.0, dated January 2009

PP Conformance: “2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A,” “2600.1-PRT, SFR Package for Hardcopy Device Print Functions, Operational Environment A,” “2600.1-SCN, SFR Package for Hardcopy Device Scan Functions, Operational Environment A,” “2600.1-CPY, SFR Package for Hardcopy Device Copy Functions, Operational Environment A,” “2600.1-FAX, SFR Package for Hardcopy Device Fax Functions, Operational Environment A,” and “2600.1-SMI, SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational Environment A”

This Security Target claims demonstrable conformance to the Security Problem Definition (APE_SPD), Security Objectives (APE_OBJ), Extended Components Definitions (APE_ECD), and the Common Security Functional Requirements (APE_REQ) of the referenced PP.

This TOE performs the functions F.PRT, F.SCN, F.CPY, F.FAX, and F.SMI as defined in the referenced PP and claims demonstrable conformance to the augmented SFR packages defined for each of these functions.

Rationale for PP conformance is provided in chapter 8.

2.3 Security Requirement Package Conformance

Security assurance requirement package conformance: EAL3 augmented by ALC_FLR.2

Security functional requirement package conformance: The SFR packages itemized below from the referenced PP with augmentations.

1. Common Security Functional Requirements
2. 2600.1-PRT, SFR Package for Hardcopy Device Print Functions, Operational Environment A
3. 2600.1-SCN, SFR Package for Hardcopy Device Scan Functions, Operational Environment A
4. 2600.1-CPY, SFR Package for Hardcopy Device Copy Functions, Operational Environment A
5. 2600.1-FAX, SFR Package for Hardcopy Device Fax Functions, Operational Environment A
6. 2600.1-SMI, SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational Environment A

3. Security Problem Definition

3.1 Introduction

This chapter defines the nature and scope of the security needs to be addressed by the TOE. Specifically this chapter identifies:

- A) assumptions about the environment,
- B) threats to the assets and
- C) organisational security policies.

This chapter identifies assumptions as *A.assumption*, threats as *T.threat* and policies as *P.policy*.

This chapter addresses threats posed by four categories of threat agents:

- Persons who are not permitted to use the TOE who may attempt to use the TOE.
- Persons who are authorized to use the TOE who may attempt to use TOE functions for which they are not authorized.
- Persons who are authorized to use the TOE who may attempt to access data in ways for which they are not authorized.
- Persons who unintentionally cause a software malfunction that may expose the TOE to unanticipated threats.

The threats and policies defined in this chapter address the threats posed by these threat agents.

3.2 Assumptions

The specific conditions listed in the following subsections are assumed to exist in the TOE environment. These assumptions include both practical realities in the development of the TOE security requirements and the essential environmental conditions on the use of the TOE.

Table 12 - Assumptions

A.Type	Description
A.ACCESS.MANAGED	The TOE is located in a restricted or monitored environment that provides protection from unmanaged access to the physical components and data interfaces of the TOE.
A.ADMIN.TRAINING	Administrators are aware of the security policies and procedures of their organization, are trained and competent to follow the manufacturer's guidance and documentation, and correctly configure and operate the TOE in accordance with those policies and procedures.
A.ADMIN.TRUST	Administrators do not use their privileged access rights for malicious purposes.
A.IPSEC	IPSec with ESP is used between the TOE and all remote IT systems with which it communicates over the network using IPv4 and/or IPv6.
A.USER.TRAINING	TOE Users are aware of the security policies and procedures of their organization, and are trained and competent to follow those policies and procedures.

3.3 Threats

The threats identified in the following subsections are addressed by the TOE and the Operational Environment.

Table 13 - Threats

T.Type	TOE Threats
T.CONF.ALT	TSF Confidential Data may be altered by unauthorized persons
T.CONF.DIS	TSF Confidential Data may be disclosed to unauthorized persons
T.DOC.ALT	User Document Data may be altered by unauthorized persons
T.DOC.DIS	User Document Data may be disclosed to unauthorized persons
T.FUNC.ALT	User Function Data may be altered by unauthorized persons
T.PROT.ALT	TSF Protected Data may be altered by unauthorized persons

3.4 Organisational Security Policies

This section describes the Organizational Security Policies (OSPs) that apply to the TOE. OSPs are used to provide a basis for security objectives that are commonly desired by TOE Owners in this operational environment but for which it is not practical to universally define the assets being protected or the threats to those assets.

Table 14 - Organizational Security Policies for the TOE

Name	Definition
P.AUDIT.LOGGING	To preserve operational accountability and security, records that provide an audit trail of TOE use and security-relevant events will be created, maintained, and protected from unauthorized disclosure or alteration, and will be reviewed by authorized personnel
P.INTERFACE.MANAGEMENT	To prevent unauthorized use of the external interfaces of the TOE, operation of those interfaces will be controlled by the TOE and its IT environment.
P.SOFTWARE.VERIFICATION	To detect corruption of the executable code in the TSF, procedures will exist to self-verify executable code in the TSF.
P.USER.AUTHORIZATION	To preserve operational accountability and security, Users will be authorized to use the TOE only as permitted by the TOE Owner

4. Security Objectives

This section identifies the security objectives of the TOE and the TOE's Operational Environment. The security objectives identify the responsibilities of the TOE and the TOE's Operational Environment in meeting the security needs. Objectives of the TOE are identified as *O.objective*. Objectives that apply to the operational environment are designated as *OE.objective*.

4.1 Security Objectives for the TOE

The TOE must satisfy the following objectives.

Table 15 - Security Objectives for the TOE

O.Type	Security Objective
O.AUDIT.LOGGED	The TOE shall create and maintain a log of TOE use and security-relevant events and prevent its unauthorized disclosure or alteration.
O.CONF.NO_ALT	The TOE shall protect TSF Confidential Data from unauthorized alteration.
O.CONF.NO_DIS	The TOE shall protect TSF Confidential Data from unauthorized disclosure.
O.DOC.NO_ALT	The TOE shall protect User Document Data from unauthorized alteration.
O.DOC.NO_DIS	The TOE shall protect User Document Data from unauthorized disclosure.
O.FUNC.NO_ALT	The TOE shall protect User Function Data from unauthorized alteration.
O.INTERFACE.MANAGED	The TOE shall manage the operation of external interfaces in accordance with security policies.
O.I&A	The TOE shall provide functionality to identify and authenticate users whose accounts are defined internal to the TOE.
O.MANAGE	The TOE will provide all the functions and facilities necessary to support the administrators in their management of the security of the TOE, and restrict these functions and facilities from unauthorized use.
O.PROT.NO_ALT	The TOE shall protect TSF Protected Data from unauthorized alteration.
O.SOFTWARE.VERIFIED	The TOE shall provide procedures to self-verify executable code in the TSF.
O.TIME_STAMP	The TOE will provide reliable time stamps for accountability purposes when internal clocks are configured by an administrator.
O.USER.AUTHORIZED	The TOE shall require identification and authentication of Users, and shall ensure that Users are authorized in accordance with security policies before allowing them to use the TOE.

4.2 Security Objectives for the Operational Environment

The TOE's operational environment must satisfy the following objectives.

Table 16 - Security Objectives of the Operational Environment

OE.Type	Operational Environment Security Objective
OE.ADMIN.TRAINED	The TOE Owner shall ensure that TOE Administrators are aware of the security policies and procedures of their organization; have the training, competence, and time to follow the manufacturer's guidance and documentation; and correctly configure and operate the TOE in accordance with those policies and procedures.
OE.ADMIN.TRUSTED	The TOE Owner shall establish trust that TOE Administrators will not use their privileged access rights for malicious purposes.
OE.AUDIT.REVIEWED	The TOE Owner shall ensure that audit logs are reviewed at appropriate intervals for security violations or unusual patterns of activity.

Lexmark Multi-Function Printers without Hard Drives Security Target

OE.Type	Operational Environment Security Objective
OE.AUDIT_ACCESS.AUTHORIZED	If audit records generated by the TOE are exported from the TOE to another trusted IT product, the TOE Owner shall ensure that those records can be accessed in order to detect potential security violations, and only by authorized persons.
OE.AUDIT_STORAGE.PROTECTED	If audit records are exported from the TOE to another trusted IT product, the TOE Owner shall ensure that those records are protected from unauthorized access, deletion and modifications.
OE.I&A	The operational environment shall provide functionality to identify and authenticate users whose accounts are defined external to the TOE.
OE.INTERFACE.MANAGED	The IT environment shall provide protection from unmanaged access to TOE external interfaces.
OE.IPSEC	All remote IT system with which the TOE communicates over the network using IPv4 and/or IPv6 shall support IPsec with ESP.
OE.PHYSICAL.MANAGED	The TOE shall be placed in a secure or monitored area that provides protection from unmanaged physical access to the TOE.
OE.TIME_STAMP	The Operational Environment will provide reliable time stamps for accountability purposes when NTP is configured by an administrator.
OE.USER.AUTHORIZED	The TOE Owner shall grant permission to Users to be authorized to use the TOE according to the security policies and procedures of their organization.
OE.USER.TRAINED	The TOE Owner shall ensure that Users are aware of the security policies and procedures of their organization and have the training and competence to follow those policies and procedures.

5. Extended Components Definition

5.1 Extended Security Functional Components


5.1.1 FPT_FDI_EXP Restricted forwarding of data to external interfaces

Family behaviour:

This family defines requirements for the TSF to restrict direct forwarding of information from one external interface to another external interface.

Many products receive information on specific external interfaces and are intended to transform and process this information before it is transmitted on another external interface. However, some products may provide the capability for attackers to misuse external interfaces to violate the security of the TOE or devices that are connected to the TOE's external interfaces. Therefore, direct forwarding of unprocessed data between different external interfaces is forbidden unless explicitly allowed by an authorized administrative role. The family FPT_FDI_EXP has been defined to specify this kind of functionality.

Component leveling:



FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces provides for the functionality to require TSF controlled processing of data received over defined external interfaces before these data are sent out on another external interface. Direct forwarding of data from one external interface to another one requires explicit allowance by an authorized administrative role.

Management: FPT_FDI_EXP.1

The following actions could be considered for the management functions in FMT:

- a) Definition of the role(s) that are allowed to perform the management activities
- b) Management of the conditions under which direct forwarding can be allowed by an administrative role
- c) Revocation of such an allowance

Audit: FPT_FDI_EXP.1

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

There are no auditable events foreseen.

Rationale:

Quite often, a TOE is supposed to perform specific checks and process data received on one external interface before such (processed) data are allowed to be transferred to another external interface. Examples are firewall systems but also other systems that require a specific work flow for the incoming data before it can be transferred. Direct forwarding of such data (i.e., without processing the data first) between different external interfaces is therefore a function that—if allowed at all—can only be allowed by an authorized role.

It has been viewed as useful to have this functionality as a single component that allows specifying the property to disallow direct forwarding and require that only an authorized role can allow this. Since this is a function that is quite common for a number of products, it has been viewed as useful to define an extended component.

The Common Criteria defines attribute-based control of user data flow in its FDP class. However, in this Protection Profile, the authors needed to express the control of both user data and TSF data flow using administrative control instead of attribute-based control. It was found that using FDP_IFF and FDP_IFC for this purpose resulted in SFRs that were either too implementation-specific for a Protection Profile or too unwieldy for refinement in a Security Target. Therefore, the authors decided to define an extended component to address this functionality.

This extended component protects both user data and TSF data, and it could therefore be placed in either the FDP or the FPT class. Since its purpose is to protect the TOE from misuse, the authors believed that it was most appropriate to place it in the FPT class. It did not fit well in any of the existing families in either class, and this led the authors to define a new family with just one member.

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces

Hierarchical to: **No other components**

Dependencies: **FMT_SMF.1 Specification of Management Functions**
FMT_SMR.1 Security roles

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on [assignment: *list of external interfaces*] from being forwarded without further processing by the TSF to [assignment: *list of external interfaces*].

5.2 Extended Security Assurance Components

No extended security assurance requirements are defined.

6. Security Requirements

This section contains the functional requirements that are provided by the TOE.

The CC defines operations on security requirements. The font conventions listed below state the conventions used in this ST to identify the operations.

Assignment: indicated in italics

Selection: indicated in underlined text

Assignments within selections: indicated in italics and underlined text

SFR operation completed or partially completed in the PP: Bold

Refinement: indicated with bold text

Iterations of security functional requirements may be included. If so, iterations are specified at the component level and all elements of the component are repeated. Iterations are identified by letters in parentheses following the component or element (e.g., FAU_ARP.1(A)).

6.1 TOE Security Functional Requirements

The functional requirements are described in detail in the following subsections. Additionally, these requirements are derived verbatim from Part 2 of the *Common Criteria for Information Technology Security Evaluation* with the exception of completed operations.

6.1.1 Security Audit (FAU)

6.1.1.1 FAU_GEN.1 Audit Data Generation

FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:

- a) Start-up and shutdown of the audit functions;
- b) All auditable events for the not specified level of audit; and
- c) **All Auditable Events as each is defined for its Audit Level (if one is specified) for the Relevant SFR in Table 17; the additional auditable events specified in Table 17.**

FAU_GEN.1.2 The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity, and the outcome (success or failure) of the event; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, **for each Relevant SFR listed in Table 17: (1) information as defined by its Audit Level (if one is specified), and (2) all Additional Information (if any is required; the internal event number, ISO 8601 time of the event occurrence, severity, and process.**

Table 17 - Audit data requirements

Auditable event	Relevant SFR	Audit level	Additional Information
SECURE AUDIT TURNED ON/OFF	FAU_GEN.1	n/a	Setting (ON or OFF)

Lexmark Multi-Function Printers without Hard Drives Security Target

Auditable event	Relevant SFR	Audit level	Additional Information
Job Started (Network print job with PJJ SET USERNAME statement)	FDP_ACF.1	Not specified	Userid specified in the PJJ SET USERNAME statement, Job identifier
Job Started (Network print job without PJJ SET USERNAME statement)	FDP_ACF.1	Not specified	Userid displayed as "Unknown", Job identifier
Job Completed	FDP_ACF.1	Not specified	Job identifier
Job Canceled (By user or via release expiration period)	FDP_ACF.1	Not specified	Job identifier
Authorization Failure	FDP_ACF.1	Not specified	Building block type and name
Successful Authorization	FDP_ACF.1	Not specified	Building block type and name
Authentication Failure	FIA_UAU.1, FIA_UID.1	Basic	Building block type and name, attempted user identity
Successful Authentication	FIA_UAU.1, FIA_UID.1	Basic	Building block type and name
Authorization Failure	FMT_MTD.1	Not specified	Building block type and name
Successful Authorization	FMT_MTD.1	Not specified	Building block type and name
Setting change	FMT_MTD.1	Basic	Parameter identifier and new value
Authentication/Authorization Setting CREATION (Success)	FMT_MTD.1	Basic	Building block type and name
Authentication/Authorization Setting DELETION (Success)	FMT_MTD.1	Basic	Building block type and name
Authorization Setting MODIFICATION (Success)	FMT_MTD.1	Basic	Building block type and name
Use of the management functions	FMT_SMF.1	Minimum	None
Modifications to the group of users that are part of a role	FMT_SMR.1	Minimum	None
Time changed	FPT_STM.1	Minimum	None
User logged out due to timeout	FTA_SSL.3	Minimum	None
Failure of the trusted channel	FTP_ITC.1	Minimum	None

Application Note: The audit for "Use of the management functions" is addressed by the "Setting change" and "Authentication/Authorization Setting" audits. It is included in the audit table above for conformance with the P2600 PP.

Application Note: The audit for "Modifications to the group of users that are part of a role" is addressed by the "Authentication/Authorization Setting" audits. It is included in the audit table above for conformance with the P2600 PP.

6.1.1.2 FAU_GEN.2 User Identity Association

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

6.1.2 Cryptographic Support (FCS)

6.1.2.1 FCS_CKM.1 Cryptographic Key Generation

FCS_CKM.1.1 The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm *RSA* and specified cryptographic key sizes *2048 bits* that meet the following: *ANSI X9.31 (CAVP cert. #1233)*.

6.1.2.2 FCS_CKM.4 Cryptographic Key Destruction

FCS_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method *zeroization* that meets the following: *FIPS 140-2 (Vendor Affirmed)*.

6.1.2.3 FCS_COP.1 Cryptographic Operation

FCS_COP.1.1 The TSF shall perform *the operations listed in the table below* in accordance with a specified cryptographic algorithm *multiple algorithms described below* and cryptographic key sizes *as described below* that meet the following: *multiple standards as described below*.

Table 18 - Cryptographic Operations

Algorithm	Operations	Key/Hash Size in Bits	Standards
Triple-DES (EDE in CBC mode) (CAVP cert. #1488 & 1489)	Encryption, decryption	168	SP800-67 SP800-38A FIPS 46-3
AES (CBC mode) (CAVP cert. #2379 & 2380)		128	FIPS 197 SP800-38A
SHA (CAVP cert. #2049 & 2050)	Hashing	160, 256, 512	FIPS 180-3
RSASSA-PKCS1-v1_5 (CAVP cert. #1233)	Digital signatures	2048	PKCS#1 v2.1
Diffie-Hellman (CAVP cert. #70)	IKEv1 KDF	Group 2 (1024), Group 14 (2048), Group 15 (3072), Group 16 (4096), Group 17 (6144), Group 18 (8192)	SP800-135
DRBG (CAVP cert. #312)	Random number generation	n/a	SP 800-90A

Application Note: At the time CAVP cert. #70 was obtained, algorithm validation was not available for Groups 15, 16, 17 and 18. Those groups are vendor affirmed.

6.1.3 User Data Protection (FDP)

6.1.3.1 FDP_ACC.1 Subset Access Control

FDP_ACC.1.1(A) The TSF shall enforce the *Common Access Control SFP* on

- Subjects: Users (U.USER)*

2. *Objects: Copy Job, Incoming Fax Job, Network Print Job, Scanned Job to be Emailed, Scanned Job to be Faxed*
3. *Operations: Create, View, Modify, Release, Delete*

Application Note: “Release” refers to releasing held faxes or held jobs to be printed (at which time they can be read). “View” refers the ability to see that the job exists (D.FUNC), not to view the user data inside the job. No functionality exists to view the user data inside a job other than printing the document. “Modify” refers to the ability to change job parameters (e.g. number of copies).

FDP_ACC.1.1(B) The TSF shall enforce the *TOE Function Access Control SFP* on

1. *Subjects: Users (U.USER)*
2. *Objects: TOE Functions - F.PRT, F.SCN, F.CPY, F.FAX, F.SMI*
3. *Operations: Invoke*

6.1.3.2 FDP_ACF.1 Security Attribute Based Access Control

FDP_ACF.1.1(A) The TSF shall enforce the *Common Access Control SFP* to objects based on the following:

1. *Subjects: Users (U.USER) – Username, Group memberships*
2. *Objects: Copy Job, Incoming Fax Job, Network Print Job, Scanned Job to be Emailed, Scanned Job to be Faxed - owner*

FDP_ACF.1.2(A) The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: *the rules specified in the following table.*

Table 19 - Common Access Control SFP Rules

Operation Object	Create	View	Modify	Release	Delete
Copy Job	Allowed if the user is a member of an authorized group of the security template configured for the Copy Function access control. The job owner is the authenticated user of the touch panel.	n/a	n/a	n/a	n/a
Incoming Fax Job	Allowed if the Fax Function access control is not “disabled”, and if the “Enable Fax Receive” or “Enable Analog Receive” parameter is “On”. Note that all incoming faxes are held in the evaluated configuration. Incoming faxes are owned by any user that is a member of	n/a	n/a	Allowed if the user is a member of an authorized group of the security template configured for the Release Held Faxes access control	n/a

Operation Object	Create	View	Modify	Release	Delete
	an authorized group of the security template configured for the Release Held Faxes access control.				
Network Print Job	Allowed if the submitted job includes a userid in a SET USERNAME PJI statement and the user is a member of an authorized group for the Secure Held Print Jobs access control. Note that all incoming network print jobs are held in the evaluated configuration. The job owner is the userid specified in the PJI SET USERNAME statement.	Allowed for jobs owned by the user if the user is a member of an authorized group of the security template configured for the Secure Held Print Jobs access control	n/a	Allowed for jobs owned by the user if the user is a member of an authorized group of the security template configured for the Secure Held Print Jobs access control	Allowed for jobs owned by the user if the user is a member of an authorized group of the security template configured for the Secure Held Print Jobs access control
Scanned Job to be Emailed	Allowed if the user is a member of an authorized group of the security template configured for the E-mail Function access control. The job owner is the authenticated user of the touch panel.	n/a	n/a	n/a	n/a
Scanned Job to be Faxed	Allowed if the user is a member of an authorized group of the security template configured for the Fax Function access control; the "Enable Fax Scans" parameter is On; and the "Fax Mode" parameter is "Analog Fax". The job owner is the authenticated user of the touch panel.	n/a	n/a	n/a	n/a

FDP_ACF.1.3(A) The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: *no rules that explicitly authorise access.*

FDP_ACF.1.4(A) The TSF shall explicitly deny access of subjects to objects based on the following rules: *if a listed access control is "Disabled" access is denied.*

FDP_ACF.1.1(B) The TSF shall enforce the *TOE Function Access Control SFP* to objects based on the following:

1. *Subjects: Users (U.USER) – Group memberships*
2. *Objects: TOE Functions (F.PRT, F.SCN, F.CPY, F.FAX, F.SMI) - None*

FDP_ACF.1.2(B) The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: **the user is explicitly authorized by U.ADMINISTRATOR to use a function.**

FDP_ACF.1.3(B) The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: *no rules that explicitly authorise access.*

FDP_ACF.1.4(B) The TSF shall explicitly deny access of subjects to objects based on the following rules: *if a listed access control is “Disabled” access is denied.*

6.1.3.3 FDP_RIP.1 Subset Residual Information Protection

FDP_RIP.1.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the deallocation of the resource from the following objects: **D.DOC.**

6.1.4 Identification and Authentication (FIA)

6.1.4.1 FIA_AFL.1 Authentication Failure Handling

FIA_AFL.1.1 The TSF shall detect when an administrator configurable positive integer within the range of 1 to 10 unsuccessful authentication attempts occur related to *accounts within the administratively configured failure time frame.*

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been met, the TSF shall *disable the account for the administratively configured lockout time.*

6.1.4.2 FIA_ATD.1 User Attribute Definition

FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users:

1. *Username*
2. *Password*
3. *Associated groups*
4. *User permissions, as specified by associated groups and security template configurations*
5. *Number of consecutive authentication failures*
6. *Time of the earliest authentication failure (since the last successful login if any have occurred)*
7. *Account lock status*

6.1.4.3 FIA_UAU.1 Timing of Authentication

FIA_UAU.1.1 The TSF shall allow *submission of network print jobs, incoming faxes (if enabled), and usage of the touch panel and browser sessions with the Embedded Web Server to access menus that have been configured for “no security”* on behalf of the user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

Application Note: The TOE only performs the authentication for users using Internal Accounts or the Backup Password. When I&A uses LDAP+GSSAPI or Smart Card, authentication is under the control of the LDAP server (and the Smart Card) in the operational environment. For all mechanisms, the TOE restricts access to other functionality until authentication is successful.

6.1.4.4 FIA_UAU.7 Protected Authentication Feedback

FIA_UAU.7.1 The TSF shall provide only *asterisks (“*”) or dots (“•”)* to the user while the authentication is in progress.

6.1.4.5 FIA_UID.1 Timing of Identification

FIA_UID.1.1 The TSF shall allow *incoming faxes (if enabled) and usage of the touch panel and browser sessions with the Embedded Web Server to access menus that have been configured for “no security”* on behalf of the user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

Application Note: The TOE only performs the identification for users using Internal Accounts or the Backup Password. When I&A uses LDAP+GSSAPI or Smart Card, identification is under the control of the LDAP server (and the Smart Card) in the operational environment. For all mechanisms, the TOE restricts access to other functionality until identification is successful.

6.1.4.6 FIA_USB.1 User-Subject Binding

FIA_USB.1.1 The TSF shall associate the following user security attributes with subjects acting on behalf of that user:

1. *Username*
2. *Password*
3. *Associated groups (for Internal Accounts only)*
4. *User permissions*
5. *Building block name used during authentication*

FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on the behalf of users:

1. *The username and password are the values supplied by the user.*
2. *The associated groups are the values configured for the user account.*
3. *User permissions are determined by the security templates that include groups in the authorization building blocks that are associated groups of the user.*
4. *The building block name is specified in the security template of the item with access control restrictions that required I&A.*

FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes associated with subjects acting on the behalf of users: *the security attributes do not change during a session.*

6.1.5 Security Management (FMT)

6.1.5.1 FMT_MSA.1 Management of Security Attributes

FMT_MSA.1.1 The TSF shall enforce the *Common Access Control SFP and TOE Function Access Control SFP* to restrict the ability to query, modify, delete, create the security attributes *Username, associated groups and user permissions to administrators authorized for access to the Security Menu*.

6.1.5.2 FMT_MSA.3 Static Attribute Initialisation

FMT_MSA.3.1 The TSF shall enforce the *Common Access Control SFP and TOE Function Access Control SFP* to provide restrictive default values for security attributes that are used to enforce the SFP.

FMT_MSA.3.2 The TSF shall allow the *no role* to specify alternative initial values to override the default values when an object or information is created.

6.1.5.3 FMT_MTD.1 Management of TSF Data

FMT_MTD.1.1 The TSF shall restrict the ability to query, modify, delete, create the *data identified in the following table* to **the authorized identified roles except U.NORMAL**.

Application Note: The user permission for each TSF data item to determine “authorized identified roles” is identified in the following table.

Table 20 - TSF Data

Item	Authorization Menu Item	Operations
Access Control Authorizations	Security Menu at the Device, Security Menu Remotely	Query, Modify
Active Directory Configuration	Security Menu at the Device, Security Menu Remotely	Create
Analog Fax - Cancel Faxes	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Analog Fax - Driver to fax	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Analog Fax - Enable Fax Receive	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Analog Fax - Enable Manual Fax	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Analog Fax - Fax Forwarding	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Analog Fax - Holding Faxes	Settings Menu at the Device, Settings Menu Remotely	Query, Modify, Delete, Create
Backup Password	Security Menu at the Device, Security Menu Remotely	Modify, Delete, Create
Date and Time Parameters	Security Menu at the Device, Security Menu Remotely	Query, Modify
E-mail images sent As	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Enable Audit	Security Menu at the Device, Security Menu Remotely	Query, Modify
Enable Fax Scans	Settings Menu at the Device, Settings Menu Remotely	Query, Modify

Item	Authorization Menu Item	Operations
Enable FTP/TFTP	Network/Ports Menu at the Device, Network/Ports Menu Remotely	Query, Modify
Enable HTTP Server	Network/Ports Menu at the Device, Network/Ports Menu Remotely	Query, Modify
Enable Remote Syslog	Security Menu at the Device, Security Menu Remotely	Query, Modify
Fax Mode	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Fax Server - Enable Analog Receive	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Held Print Job Expiration Timer	Security Menu at the Device, Security Menu Remotely	Query, Modify
Internal Account Building Blocks	Security Menu at the Device, Security Menu Remotely	Query, Modify, Delete, Create
Internal Account Groups	Security Menu at the Device, Security Menu Remotely	Query, Modify, Delete, Create
Internal Account Usernames and Passwords	Security Menu at the Device, Security Menu Remotely	Query, Modify, Delete, Create
Internal Accounts Required User Credentials	Security Menu at the Device, Security Menu Remotely	Query, Modify
Job Waiting	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
LDAP Certificate Verification	Security Menu at the Device, Security Menu Remotely	Query, Modify
LDAP+GSSAPI – Certificate	Security Menu at the Device, Security Menu Remotely	Query, Modify
LDAP+GSSAPI – MFP Credentials	Security Menu at the Device, Security Menu Remotely	Query, Modify
LDAP+GSSAPI Building Blocks	Security Menu at the Device, Security Menu Remotely	Query, Modify, Delete, Create
Login Restrictions	Security Menu at the Device, Security Menu Remotely	Query, Modify
Network Port	Network/Ports Menu at the Device, Network/Ports Menu Remotely	Query, Modify
Remote Syslog Parameters	Security Menu at the Device, Security Menu Remotely	Query, Modify
Security Reset Jumper	Security Menu at the Device, Security Menu Remotely	Query, Modify
Security Templates	Security Menu at the Device, Security Menu Remotely	Query, Modify, Delete, Create
Simple Kerberos Setup	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Smart Card Authentication Client Building Block	Security Menu at the Device, Security Menu Remotely	Query, Modify
SMTP Setup Settings	Network/Ports Menu at the Device, Network/Ports Menu Remotely	Query, Modify
SMTP Setup Settings - User-Initiated E-mail	Network/Ports Menu at the Device, Network/Ports Menu Remotely	Query, Modify
Touch Panel Menu Display – FTP	Settings Menu at the Device, Settings Menu Remotely	Query, Modify

Item	Authorization Menu Item	Operations
Touch Panel Menu Display - FTP shortcuts	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
Touch Panel Menu Display - USB Drive	Settings Menu at the Device, Settings Menu Remotely	Query, Modify
USB Buffer	Network/Ports Menu Remotely	Query, Modify
Use Backup Password	Security Menu at the Device, Security Menu Remotely	Query, Modify

6.1.5.4 FMT_SMF.1 Specification of Management Functions

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions:

1. *User management*
2. *Access control management*
3. *Time management*

6.1.5.5 FMT_SMR.1 Security Roles

FMT_SMR.1.1 The TSF shall maintain the roles *defined by the security-relevant permissions in the following table that can be configured in an operational TOE for users via building blocks in security templates for the specific permissions.*

Table 21 - FMT_SMR.1 Detail

Item	Description	Administrators Only?
Copy Function	Control's a user's access to the Copy functionality	No
E-mail Function	Control's a user's access to the Email functionality (scan to email)	No
Fax Function	Control's a user's ability to perform a scan to fax job When "Disabled", all analog faxing (scan send, receive, and driver send) and the fax server are disabled. The fax icon is removed and the device does not answer incoming calls nor print driver faxes. However, the panel menus still display fax-related settings as though fax were enabled. When protected by a security template, the values of the "Enable Fax Scan", "Driver to Fax", and "Enable Fax Receive" settings in the "Fax Settings Menu" determine the behavior of Fax Receive and Driver Fax. Fax Scan sending is enabled if the user provides valid credentials.	No
Network/Ports Menu (and submenus)	Controls access to the Network/ Ports Menu via the Administration Menus	Yes
Release Held Faxes	Controls access to the Held Faxes button and the Release Held Faxes button on the Home screen	Yes
Reports Menu (and submenus)	Controls access to the Reports Menu via the Administration Menus. This includes information about user jobs, which can't be disclosed to non-administrators.	Yes

Item	Description	Administrators Only?
Secure Held Print Jobs	In the evaluated configuration, controls which users are permitted to access the Held Jobs menu.	No
Security Menu (and submenus)	Controls access to the Security Menu via the Administration Menus	Yes
Settings Menu (and submenus)	Controls access to the Settings Menu via the Administration Menus	Yes

Application Note: If any permission identified as “Administrators Only” in the table above is associated with a user account, then that user account is implicitly an Administrator (U.ADMINISTRATOR). If no permission identified as “Administrators Only” in the table above is associated with a user account but any permission not identified as “Administrator Only” is, then that user account is implicitly a Normal User (U.NORMAL). The role “Nobody” applies to a defined user that has no permissions identified in the table above.

FMT_SMR.1.2 The TSF shall be able to associate users with roles, **except for the role “Nobody” to which no user shall be associated.**

Refinement Rationale: The SFR is reproduced with the refinement included in the P2600 Protection Profile.

6.1.6 Protection of the TSF (FPT)

6.1.6.1 FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on **any external Interface** from being forwarded without further processing by the TSF to **any Shared-medium Interface**.

Application Note: For this TOE, the network interface is the only shared-medium interface.

6.1.6.2 FPT_STM.1 Reliable Time Stamps

FPT_STM.1.1 The TSF shall be able to provide reliable time-stamps.

Application Note: This SFR only applies when the TOE is configured to use internal timestamps. If the TOE is configured to obtain timestamps from an external NTP server, this functionality is provided by that external NTP server in the operational environment.

6.1.6.3 FPT_TST.1 TSF Testing

FPT_TST.1.1 The TSF shall run a suite of self tests during initial start-up to demonstrate the correct operation of the hardware components of the TSF.

FPT_TST.1.2 The TSF shall provide authorised users with the capability to verify the integrity of the security templates and building blocks.

FPT_TST.1.3 The TSF shall provide authorised users with the capability to verify the integrity of **stored TSF executable code**.

6.1.7 TOE Access (FTA)

6.1.7.1 FTA_SSL.3 TSF-Initiated Termination

FTA_SSL.3.1 The TSF shall terminate an interactive session after a *period of time configured by an authorized administrator for touch panel and web browser sessions*.

6.1.8 Trusted Path/Channels (FTP)

6.1.8.1 FTP_ITC.1 Inter-TSF Trusted Channel

FTP_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP_ITC.1.2 The TSF shall permit **the TSF, another trusted IT product** to initiate communication via the trusted channel.

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for **communication of D.DOC, D.FUNC, D.PROT, and D.CONF over any Shared-medium Interface.**

Application Note: For this TOE, the network interface is the only shared-medium interface. The TSF requires all IP datagrams entering or leaving the box to use IPSec with ESP (other than the ISAKMP/IKE datagrams used to set up the security associations). If an incoming IP datagram does not satisfy this rule, the TSF attempts to establish a security association with the remote IT system that originated the datagram.

6.2 TOE Security Assurance Requirements

The TOE meets the assurance requirements for EAL3 augmented by ALC_FLR.2. These requirements are summarized in the following table.

Table 22 - EAL3+ Assurance Requirements

Assurance Class	Component ID	Component Title
Development	ADV_ARC.1	Security architecture description
	ADV_FSP.3	Functional specification with complete summary
	ADV_TDS.2	Architectural design
Guidance Documents	AGD_OPE.1	Operational user guidance
	AGD_PRE.1	Preparative procedures
Life-Cycle Support	ALC_CMC.3	Authorisation controls
	ALC_CMS.3	Implementation representation CM coverage
	ALC_DEL.1	Delivery procedures
	ALC_DVS.1	Identification of security measures
	ALC_FLR.2	Flaw reporting procedures
	ALC_LCD.1	Developer defined life-cycle model
Tests	ATE_COV.2	Analysis of coverage
	ATE_DPT.1	Testing: basic design
	ATE_FUN.1	Functional testing
	ATE_IND.2	Independent testing - sample
Vulnerability Assessment	AVA_VAN.2	Vulnerability analysis

6.3 CC Component Hierarchies and Dependencies

This section of the ST demonstrates that the identified SFRs include the appropriate hierarchy and dependencies. The following table lists the TOE SFRs and the SFRs each are hierarchical to, dependent upon and any necessary rationale.

Table 23 - TOE SFR Dependency Rationale

SFR	Hierarchical To	Dependency	Rationale
FAU_GEN.1	No other components.	FPT_STM.1	Satisfied
FAU_GEN.2	No other components.	FAU_GEN.1, FIA_UID.1	Satisfied Satisfied
FCS_CKM.1	No other components.	[FCS_CKM.2 or FCS_COP.1], FCS_CKM.4	Satisfied Satisfied
FCS_CKM.4	No other components.	[FDP_ITC.1 or FDP_ITC.2, or FCS_CKM.1]	Satisfied
FCS_COP.1	No other components.	[FDP_ITC.1 or FDP_ITC.2, or FCS_CKM.1], FCS_CKM.4	Satisfied Satisfied
FDP_ACC.1	No other components.	FDP_ACF.1	Satisfied
FDP_ACF.1	No other components.	FDP_ACC.1, FMT_MSA.3	Satisfied Satisfied
FDP_RIP.1	No other components.	None	n/a
FIA_AFL.1	No other components.	FIA_UAU.1	Satisfied
FIA_ATD.1	No other components.	None	n/a
FIA_UAU.1	No other components.	FIA_UID.1	Satisfied
FIA_UAU.7	No other components.	FIA_UAU.1	Satisfied
FIA_UID.1	No other components.	None	n/a
FIA_USB.1	No other components.	FIA_ATD.1	Satisfied
FMT_MSA.1	No other components.	[FDP_ACC.1 or FDP_IFC.1], FMT_SMF.1 FMT_SMR.1	Satisfied Satisfied Satisfied
FMT_MSA.3	No other components.	FMT_MSA.1, FMT_SMR.1	Satisfied Satisfied
FMT_MTD.1	No other components.	FMT_SMF.1, FMT_SMR.1	Satisfied Satisfied
FMT_SMF.1	No other components.	None	n/a
FMT_SMR.1	No other components.	FIA_UID.1	Satisfied
FPT_FDI_EXP.1	No other components.	FMT_SMF.1, FMT_SMR.1	Satisfied Satisfied
FPT_STM.1	No other components.	None	n/a
FPT_TST.1	No other components.	None	n/a
FTA_SSL.3	No other components.	None	n/a
FTP_ITC.1	No other components.	None	n/a

7. TOE Summary Specification

7.1 Security Functions

7.1.1 Audit Generation

The TOE generates audit event records for security-relevant events. A severity level is associated with each type of auditable event; only events at or below the severity level configured by an administrator are generated.

Each record format follows the syslog format defined in the Berkeley Software Distribution (BSD) Syslog Protocol (RFC 3164). The TOE supplies the PRI, HEADER, MSG/TAG, and MSG/CONTENT fields for all messages. The CONTENT portion may contain the following fields (in order, separated by commas):

- Event Number
- ISO 8601 time ([YYYY-MM-DD]T[hh:mm:ss])
- Severity
- Process (same as TAG)
- Remote IPv4 address
- Remote IPv6 address
- Remote Hostname
- Remote Port
- Local Port
- Authentication/Authorization method
- Username
- Setting ID
- Setting's new value
- Event name
- Event data

The time field is supplied by the TOE if internal time is configured by an administrator or by an NTP server if external time is configured.

Fields in the CONTENT section that are not relevant for specific events are blank. The remote IPv4 address, remote IPv6 address, remote hostname, remote port, and local port fields are always blank for events resulting from actions at the MFP (e.g. usage of the touch panel). The events that cause audit records to be generated are specified in section 6.1.1.1 .

As audit event records are generated, they are forwarded to the remote syslog IT system configured by an administrator.

7.1.2 Identification and Authentication

Users are required to successfully complete the I&A process before they are permitted to access any restricted functionality. The set of restricted user functionality is under the control of the administrators, with the exception of submission of network print jobs which is always allowed. Users are permitted to access any TOE functionality that has a corresponding access control (see section 7.1.3 below) configured for “no security”.

The I&A process is controlled by security templates that are associated with functions and menus. Each security template specifies two building blocks – one for authentication and the second for authorization. The security template also includes a list of groups that are authorized to perform the function or access the menu that the security template is associated with.

When I&A is necessary, the TOE examines the authentication building block in the security template to determine what authentication mechanism should be used. The general purpose mechanisms supported in the evaluated configuration are Smart Card authentication, Internal Accounts and LDAP+GSSAPI.

For Smart Card authentication, no functions at the touch panel are allowed until I&A successfully completes. The touch panel displays a message directing the user to insert a card into the attached reader. Once a card is inserted, the user is prompted for a PIN. When the PIN is entered, only asterisks (“*”) or dots (“•”) are displayed. Once the PIN is collected (indicated by the user touching the Next button), the TOE passes the PIN to the card for validation. If it is not valid, a message is displayed on the touch panel and the user is asked to re-enter the PIN. After the card-configured number of consecutive invalid PINs, the card will lock itself until unlocked by a card administrator.

Upon successful card validation, the TOE forwards the certificate from the card to the configured Kerberos Key Distribution Center (Windows Domain Controller) for validation. If the certificate validation is not successful, an error message is displayed on the touch panel until the current card is removed from the reader. If the certificate validation is successful, the TOE binds the username, account name, email address (all obtained from the LDAP server), and name of the building block used for authentication to the user session for future use. An audit record for the successful authentication is generated.

For Internal Accounts and LDAP+GSSAPI, the TOE collects a username and password via the touch panel or via the browser session. When the password is entered, only asterisks (“*”) are displayed. Once the username and password are collected, the next step in the process depends on the I&A mechanism being used.

For Internal Accounts, the TOE performs the validation of the username and password against the set of configured Internal Accounts.

For LDAP+GSSAPI, the TOE forwards the username and password to the configured LDAP server for validation (using the configured machine credentials) and waits for the response. If no response is received, the validation is considered to have failed.

For Internal Accounts and LDAP+GSSAPI, if the validation fails because of an invalid password (for a valid username), the count of failed authentication attempts is incremented for that building block and account combination. If the threshold for failed attempts within a time period is reached, then the account is marked as being locked for the configured amount of time to mitigate against brute force password attacks. This information is tracked in memory and is not

maintained across a restart of the TOE. Note that for LDAP+GSSAPI validations, the server may also be enforcing limits on authentication failures. These mechanisms operate independently and are not required to be comparably configured.

In the case of failed validations, an error message is displayed via the touch panel or browser session, and then the display returns to the previous screen for further user action. An audit record for the failed authentication attempt is generated.

If validation is successful, the TOE binds the username, password, account name, email address, group memberships (for Internal Accounts only) and name of the building block used for authentication to the user session for future use (only the username and group memberships are security attributes). An audit record for the successful authentication is generated.

The user session is considered to be active until the user explicitly logs off, removes the card or the administrator-configured inactivity timer for sessions expires. If the inactivity timer expires, an audit record is generated.

7.1.2.1 Backup Password

The Backup Password mechanism allows an administrator to access the Security Menu regardless of the access controls configured for it. When a user attempts to access the Security Menu, the authentication prompt displays a selection that enables a user to authenticate with the Backup Password instead of the method that normally secures this menu. This function may be necessary under unusual circumstances, such as when communication with the LDAP server is not operational.

If the correct Backup Password is supplied, the administrator is considered to be successfully authenticated and authorized for access to the Security Menu (only). A “Successful Authentication” audit record is generated. If an incorrect Backup Password is supplied, an error message is displayed, an audit record is generated, and then the display is returned to the previous screen.

If an invalid password is supplied, the count of failed authentication attempts for the Backup Password is incremented. If the threshold for failed attempts within a time period is reached, then the Backup Password is marked as being locked for the configured amount of time to mitigate against brute force password attacks. This information is tracked in memory and is not maintained across a restart of the TOE.

The Backup Password mechanism may be disabled by an authorized administrator.

7.1.2.2 Active Directory

If Active Directory parameters are supplied and Join is selected, the parameter values are used to join the Active Directory Domain. If successful, machine credentials are generated and the LDAP+GSSAPI Building Block parameters are automatically updated with the Domain and machine information.

Once the Domain has been joined, subsequent I&A attempts may use the LDAP+GSSAPI Building Block to validate user credentials using the newly-created machine credentials as described above. The credentials specified for Active Directory by an authorized administrator are not saved.

7.1.3 Access Control

Access control validates the user access request against the authorizations configured by administrators for specific functions. On a per-item basis, authorization may be configured as “disabled” (no access), “no security” (open to all users), or restricted (via security templates) (some items do not support all three options). Authorization may be configured for the following items:

Table 24 - Access Control Items

Item	Description	Comment
Address Book	Controls access to the Search Address Book button that appears as part of the E-mail, FTP, and Fax functions that are available from the panel’s Home screen	Any authorization option may be configured
Allow Flash Drive Access	Controls whether USB interfaces may be used for print and scan operations	Must be disabled in the evaluated configuration
App [x]	Controls the execution of eSF and LDD profiles that specify using one of these slots	Access must be restricted to authorized users in the evaluated configuration
Apps Configuration	Controls access to the configuration of any installed applications	Access must be restricted to authorized administrators in the evaluated configuration
Cancel Jobs at the device	Controls access to the functionality to cancel jobs via the touch panel.	Access must be restricted to authorized users in the evaluated configuration
Change Language	Controls access to the Change Language button on the Home screen (when displayed); this button is NOT displayed by default but a user can activate it via the “General Settings Menu”	Any authorization option may be configured
Color Dropout	Controls a user’s ability to activate the Color Dropout functionality as part of a job; if protected and the user fails to authenticate, then the device DOES NOT use the color dropout functionality in the job	Any authorization option may be configured
Configuration File Import/Export	Controls the ability to import and export settings and security configuration files	Access must be disabled or restricted to authorized administrators in the evaluated configuration
Configuration Menu (and submenus)	Controls access to the Configuration Menu via the front panel	Must be disabled in the evaluated configuration
Copy Color Printing	Controls a user’s ability to copy content in color	Any authorization option may be configured
Copy Function	Control’s a user’s access to the Copy functionality	Access must be disabled or restricted to authorized users in the evaluated configuration
Create Bookmarks at the device	Controls access to the Delete Bookmark, Create Bookmark, and Create Folder buttons via the touch panel from both the bookmark list screen and from the individual bookmark screen; unless disabled, all users (regardless of their credentials) can search and print bookmarks	Must be disabled in the evaluated configuration

Lexmark Multi-Function Printers without Hard Drives Security Target

Item	Description	Comment
Create Bookmarks Remotely	Controls access to the Delete Bookmark, Create Bookmark, and Create Folder buttons via the web from both the bookmark list screen and from the individual bookmark screen; unless disabled, all users (regardless of their credentials) can search and print bookmarks	Must be disabled in the evaluated configuration
Create Profiles	Controls the ability to create scan profiles from remote systems.	Must be disabled in the evaluated configuration
E-mail Function	Control's a user's access to the Email functionality (scan to email)	Access must be disabled or restricted to authorized users in the evaluated configuration
Solutions Configuration	Controls access to the Embedded Solutions link (and all sublinks) via the Web page	Access must be disabled or restricted to authorized users in the evaluated configuration
Fax Function	<p>Control's a user's ability to perform a scan to fax job</p> <p>When "Disabled", all analog faxing (scan send, receive, and driver send) and the fax server are disabled. The fax icon is removed and the device does not answer incoming calls nor print driver faxes. However, the panel menus still display fax-related settings as though fax were enabled.</p> <p>When protected by a security template, the values of the "Enable Fax Scan", "Driver to Fax", and "Enable Fax Receive" settings in the "Fax Settings Menu" determine the behavior of Fax Receive and Driver Fax. Fax Scan sending is enabled if the user provides valid credentials.</p>	Access must be disabled or restricted to authorized users in the evaluated configuration
Firmware Updates	Controls a user's ability to update the device's firmware code via the network	Must be disabled in the evaluated configuration
FTP Function	Controls a user's ability to access the FTP button on the Home Screen (when displayed); the FTP button is hidden by default and does not display unless a user activates it via the Home Screen Customization menu in the "General Settings Menu"	Must be disabled in the evaluated configuration
Held Jobs Access	Controls access to the Held jobs menu if the "Secure Held Print Jobs" (Lexmark models only) or "Secure Print Jobs Release" (Dell models only) eSF application is not installed	Must be disabled in the evaluated configuration
Manage Shortcuts at the device	Controls access to the Manage Shortcuts Menu via the Administration Menus	Access may be configured as restricted or no security, but not disabled

Lexmark Multi-Function Printers without Hard Drives Security Target

Item	Description	Comment
Manage Shortcuts Remotely	Controls access to the Manage Shortcuts Menu via the web	Access may be configured as restricted or no security, but not disabled
Network/Ports Menu at the device (and submenus)	Controls access to the Network/ Ports Menu via the Administration Menus	Access must be restricted to authorized administrators in the evaluated configuration
Network/Ports Menu Remotely	Controls access to the Network/ Ports Menu via the web	Access must be restricted to authorized administrators in the evaluated configuration
New Apps	Controls access to configuration parameters for apps subsequently added to the device.	Access must be restricted to authorized administrators in the evaluated configuration
Option Card Configuration at the device	Controls a user’s ability to access the “Option Card Menu” that displays menu nodes associated with installed DLEs	Access must be restricted to authorized administrators in the evaluated configuration
Option Card Configuration Remotely	Controls a user’s ability to access the “Option Card Menu” via the web	Access must be restricted to authorized administrators in the evaluated configuration
Paper Menu at the device (and submenus)	Controls access to the Paper Menu via the Administration Menus	Any authorization option may be configured
Paper Menu Remotely	Controls access to the Paper Menu via the web	Any authorization option may be configured
PJL Device Setting Changes	When “Disabled”, prohibits any changes to system settings via PJL operators	Must be disabled in the evaluated configuration
Release Held Faxes	Controls access to the Held Faxes button and the Release Held Faxes button on the Home screen	Access must be restricted to authorized administrators in the evaluated configuration
Remote Management	Controls whether or not management functions may be invoked from remote IT systems	Must be disabled in the evaluated configuration
Reports Menu at the device (and submenus)	Controls access to the Reports Menu via the Administration Menus. This includes information about user jobs, which can’t be disclosed to non-administrators.	Access must be restricted to authorized administrators in the evaluated configuration
Reports Menu Remotely	Controls access to the Reports Menu via the web	Access must be restricted to authorized administrators in the evaluated configuration
Secure Held Print Jobs	Controls access to the Held Jobs menu if the “Secure Held Print Jobs” (Lexmark models only) or “Secure Print Jobs Release” (Dell models only) eSF application is installed	Access must be restricted to authorized users in the evaluated configuration
Security Menus at the device (and submenus)	Controls access to the Security Menu via the Administration Menus	Access must be restricted to authorized administrators in the evaluated configuration
Security Menu Remotely	Controls access to the Security Menu via the web	Access must be restricted to authorized administrators in the evaluated configuration
Settings Menu at the device (and submenus)	Controls access to the Settings Menu via the Administration Menus	Access must be restricted to authorized administrators in the evaluated configuration

Item	Description	Comment
Settings Menu Remotely	Controls access to the Settings Menu via the web	Access must be restricted to authorized administrators in the evaluated configuration
Use Profiles	Controls a user's ability to execute any profile	Access must be configured as no security
Web Import/Export Settings	Protects the Import/Export link in the Settings section of the AIO's Web page and all links beneath the Import/Export link	Must be disabled in the evaluated configuration

Authorization is restricted by associating a security template with an item. The security template assigned to each item may be the same or different as the security template(s) assigned to other items. Each security template points to an authentication building block as well as an authorization building block; the two building blocks may be the same or different.

When the item is a menu, access is also restricted to all submenus (a menu that is normally reached by navigating through the listed item). This is necessary for instances where a shortcut could bypass the listed menu. If a shortcut is used to access a sub-menu, the access control check for the applicable menu item is still performed (as if normal menu traversal was being performed).

When a function is restricted by a security template, the access control function first determines if the user has already authenticated against the building block contained in the security template. If the user authenticated previously (during the current session), the name of the building block used during that authentication process was cached and can be compared to the name of the building block for this security template. If they match, the authentication step is skipped. Otherwise, if an authentication for a different building block was successfully performed during the current session, the username and password cached from that interaction is re-used for this authentication process against the authentication building block for this security template. If no authentication has already been done for this session, the I&A function is performed before access control continues.

Further access control processing is dependent on the type of authorization building block contained in the security template.

7.1.3.1 Internal Account Building Blocks

The set of groups configured for the Internal Account (and bound to the session during the I&A function) is compared to the set of groups included in the security template. If there are any common groups in those sets, the access control check is satisfied and the user is granted access to the requested function.

7.1.3.2 LDAP+GSSAPI and Smart Card Authentication Client Building Blocks

For each group specified in the authorization building block, the LDAP server is queried to determine if the user is a member of the group. If the user is a member of any of those groups, the access control check is satisfied and the user is granted access to the requested function.

7.1.3.3 Common Processing

The information in this section applies to all types of building blocks.

If the access control check fails for an operation, a message is displayed then the display is returned to the previous screen.

An audit record is generated with the result of the access control check.

7.1.3.4 Function Access Control

The following table summarizes the access controls and configuration parameters used by the TOE to control user access to the MFP functions provided by the TOE. Additional details for each function are provided in subsequent sections.

Table 25 - TOE Function Access Control SFP Rules

Object	Access Control Rules	Configuration Parameter Rules
F.PRT	<p>Network print jobs can always be submitted. The job is held until released by a user who is a member of an authorized group for the Secure Held Print Jobs access control and has the same userid as was specified in the SET USERNAME PJI statement. Network print jobs without a PJI SET USERNAME statement are automatically deleted after the expiry period for held jobs.</p> <p>Allowed for incoming faxes if the Fax Function access control is not “disabled”.</p>	<p>Allowed</p> <p>Allowed if the “Enable Fax Receive” or “Enable Analog Receive” parameter is “On”.</p>
F.SCN	<p>Allowed for fax if the user is a member of an authorized group of the security template configured for the Fax Function access control</p> <p>Allowed for copying if the user is a member of an authorized group of the security template configured for the Copy Function access control</p> <p>Allowed for emailing if the user is a member of an authorized group of the security template configured for the Email Function access control</p>	<p>Allowed if the “Enable Fax Scans” parameter is On and the “Fax Mode” parameter is “Analog Fax”</p> <p>Allowed</p> <p>Allowed</p>
F.CPY	<p>Allowed if the user is a member of an authorized group of the security template configured for the Copy Function access control</p> <p>In addition, color copying is allowed if the Copy Color Printing access control is “No security” or if the user is a member of an authorized group</p>	<p>Allowed</p> <p>Allowed</p>
F.FAX	<p>Incoming faxes are not subject to access control. All incoming faxes are held until released by a user who is a member of an authorized group of the security template configured for the Release Held Faxes access control</p>	<p>Allowed if the “Enable Fax Receive” or “Enable Analog Receive” parameter is “On”.</p>

Object	Access Control Rules	Configuration Parameter Rules
	Allowed for outgoing fax if the Fax Function access control is “No security” or if the user is a member of an authorized group	Allowed
F.SMI	Allowed provided the individual function access control allowed the function	Allowed

7.1.3.4.1 Printing

Submission of print jobs from users on the network is always permitted. Jobs that do not contain a PJI SET USERNAME statement are discarded after the configured held jobs expiry period. Submitted jobs are always held on the TOE until released or deleted by a user authorized for the appropriate access control and whose userid matches the username specified when the job was submitted. Users are able to display the queue of their pending print jobs. When a job is released, the user has the option to change the number of copies to be printed. If a held job is not released within the configured expiration time, the job is automatically deleted.

7.1.3.4.2 Scanning (to Fax or Email)

Scanning may be performed as part of a fax or email function. Only authorized users may perform scans.

The destination of the fax scan is determined by the setting of the “Fax Mode” configuration parameter. If it is configured for “Analog Fax” then the scanned data is transmitted out the phone line as a fax. If it is configured for “Fax Server” then the scanned data is forwarded to the configured email server via SMTP.

Scanning for fax is allowed if the Enable Fax Scans configuration parameter is “On” and the user is authorized for the Fax Function access control.

Scanning for email is allowed if the user is authorized for the E-mail Function access control.

7.1.3.4.3 Copying

Copying is allowed if the user is authorized for the Copy Function access control. A user may view or delete their own copy jobs queued for printing.

7.1.3.4.4 Incoming Fax

Incoming faxes are allowed if the “Enable Fax Receive” (for analog fax mode) or “Enable Fax Receive” (for fax server mode) configuration parameter is “On”.

Incoming faxes are always held in the queue (until released) in the evaluated configuration. Only users authorized for the Release Held Faxes access control may release or delete the faxes.

7.1.3.4.5 Shared-medium Interface

The TOE supports scanning to an external SMTP server via the network interface. When fax functionality is enabled and the “Fax Mode” is configured for “Fax Server” outgoing faxes are converted to a file and attached to outgoing SMTP messages. Administrators require access to the Security Menu to configure the Fax Function access control and the Settings Menu to configure the fax server parameters.

7.1.3.5 Postscript Access Control

In the evaluated configuration, the setdevparams, setsysparams and setuserparams Postscript operators are made non-operational so that the Postscript DataStream can not modify configuration settings in the TOE.

7.1.4 Management

The TOE provides the ability for authorized administrators to manage TSF data from remote IT systems via a browser session or locally via the touch panel. Authorization is granular, enabling different administrators to be granted access to different TSF data. When an administrator modifies TSF data, an audit record is generated.

The following sections describe the management capabilities provided and are organized by the administrator menu structure available via the touch panel.

7.1.4.1 Reports Menu

The Reports menu provides the ability to print (view) the settings from other menu items as well as fax job logs (F.FUNC). This information must be restricted to authorized administrators.

7.1.4.2 Network/Ports Menu

The following table describes TSF data available for management under this menu. In the description field, “(*)” indicates the default setting for an item.

Table 26 - Network/Ports Menu TSF Data

Item	Description	Comments
Network Port	Defines the parameters required for the TOE to communicate via the standard network port	Required in the evaluated configuration
Enable FTP/TFTP	Enables FTP/TFTP server on the TOE	Must be disabled in the evaluated configuration
Enable HTTP Server	Enables HTTP(S) server on the TOE	Must be enabled in the evaluated configuration
USB Buffer	Disables all activity via the USB port	Must be disabled in the evaluated configuration
SMTP Setup Settings	Define the SMTP server to be used to send email from the TOE	Required if the TOE supports scan to email or fax to email
SMTP Setup Settings - User-Initiated E-mail	None (*) Use Device SMTP Credentials Use Session User ID & Password Use Session E-mail & Password Prompt User	Any option may be configured in the evaluated configuration

7.1.4.3 Security Menu

The following table describes TSF data available for management under this menu. In the description field, “(*)” indicates the default setting for an item.

Table 27 - Security Menu TSF Data

Item	Description	Comments
Edit Backup Password - Use Backup Password	Enables access to the Security Menu via the Backup Password	Only appears if backup password exists. Enabling the backup password is optional.
Edit Backup Password - Password	Specifies the Backup Password	The TOE requires passwords to be a minimum of 8 characters, with no composition rules. Operational guidance directs administrators to use the following composition rules when specifying passwords: at least one upper case letter, one lower case letter, and one non-alphabetic character; no dictionary words or permutations of the username
Edit Building Blocks - Internal Accounts - General Settings - Required User Credentials	User ID and password (*) User ID	"User ID and password" is required in the evaluated configuration
Edit Building Blocks - Internal Accounts - General Settings - Groups	Defines the groups that may be associated with users, Internal Account building blocks, and security templates (using Internal Accounts)	Required if Internal Account building blocks are used
Edit Building Blocks - Internal Accounts – Manage Internal Accounts	Defines the account name, username, password, email address, and associated groups for each internal account	The TOE requires passwords to be a minimum of 8 characters, with no composition rules. Operational guidance directs administrators to use the following composition rules when specifying passwords: at least one upper case letter, one lower case letter, and one non-alphabetic character; no dictionary words or permutations of the username
Edit Building Blocks - Simple Kerberos Setup - KDC Address, KDC Port, and Realm	Defines how to communicate with the KDC	Required if LDAP+GSSAPI or Smart Card is being used since they use a Kerberos Building Block in order to define the parameters for communication with the KDC
Edit Building Blocks - LDAP+GSSAPI	Defines how to communicate with the LDAP/AD server and (optionally) restrict the groups and users that will match the query	Required if LDAP+GSSAPI is being used to define the LDAP server to be used
Edit Building Blocks - LDAP+GSSAPI – Certificate	default (*) Certificate	The evaluated configuration requires the default certificate if SSL/TLS is selected in the building block.
Edit Building Blocks - LDAP+GSSAPI – Device Credentials	Distinguished username and password to be used when performing LDAP queries	Required in the evaluated configuration
Edit Building Blocks – Active Directory	Defines parameters to join an Active Directory Domain. Upon joining, machine credentials are generated and an LDAP+GSSAPI Building Block is automatically generated with the parameters for the Domain	Optionally used to automatically generate an LDAP+GSSAPI Building Block.

Item	Description	Comments
Access Controls	Specifies whether access is no security, disabled, or restricted for each item (see the Access Control security function for the list of items)	Refer to the Access Control security function for requirements on access controls
Login Restrictions	<p>The “Login failures” value determines how many failed authentications (local OR remote) are allowed within the “Failure time frame” value before the offending User Name is prevented from accessing any function protected with the same building block (e.g. LDAP, Kerberos, etc.) for the duration of the “Lockout time” value.</p> <p>The value of “Panel Login Timeout” determines how long the operator panel can remain idle on the Home screen before the user is logged off automatically.</p>	Any configuration options may be configured. The lockout function is always enabled and any settings within the allowed range will result in a configuration with adequate security against brute force password attacks.
Security Reset Jumper	<p>No Effect</p> <p>No Security (*)</p> <p>Reset to Defaults</p>	<p>“No Security” preserves all of the building blocks and templates that a user has defined, but resets each access control to its factory default security level.</p> <p>“Reset to Defaults” deletes all building blocks and templates that a user has defined and resets each access control to its factory default security level.</p>
LDAP Certificate Verification	<p>Demand (*)</p> <p>Try</p> <p>Allow</p> <p>Never</p>	“Demand!” must be configured in the evaluated configuration
Enable Audit	<p>Determines if the device records events via the remote syslog</p> <p>Yes</p> <p>No (*)</p>	“Yes” must be specified in the evaluated configuration
Enable Remote Syslog	<p>Determines if the device transmits logged events to a remote server</p> <p>Yes</p> <p>No (*)</p>	“Yes” must be specified in the evaluated configuration
Remote Syslog parameters	Defines the communication to the remote syslog system	Must be configured in the evaluated configuration.
Date and Time parameters	Controls whether the time is tracked internally or from a remote NTP server	Must be configured for either local or remote operation so that the TOE can provide timestamps in audit records

Item	Description	Comments
Held Print Job Expiration Timer	Specifies the maximum amount of time a print job is held while waiting for a user to release it for printing Off 1 hour 4 hours 24 hours 1 week	Any configuration option may be configured.

When an Internal Account is defined, initially no groups are associated with it. The TOE limits the specification of group memberships to defined groups. If a group is associated with any security templates, the group may not be deleted.

7.1.4.4 Settings Menu

The following table describes TSF data available for management under this menu. In the description field, “(*)” indicates the default setting for an item.

Table 28 - General Settings Menu TSF Data

Item	Description	Comments
FTP	Display (*) Do not display	Must be set to “Do not display” in the evaluated configuration
FTP shortcuts	Display (*) Do not display	Must be set to “Do not display” in the evaluated configuration
USB Drive	Display (*) Do not display	Must be set to “Do not display” in the evaluated configuration

7.1.4.4.1 Fax Settings Menu

Analog fax mode uses a phone line connected directly to the MFP to send and/or receive faxes. In fax server mode, scanned documents are forwarded to a fax server via SMTP rather than being transmitted out the fax interface; a fax line may still be connected to process incoming faxes. The following table describes TSF data available for management under this menu. In the description field, “(*)” indicates the default setting for an item.

Table 29 - Fax Settings Menu TSF Data

Item	Description	Comments
Fax Mode	Analog Fax Server	Any configuration option may be specified
Cancel Faxes	Allow (*) Don't Allow	Any configuration option may be specified, according to local policy concerning faxes.
Enable Fax Scans	On (*) Off When “On”, user can create faxes with the device’s scanner.	Any configuration option may be specified, according to local policy concerning scan to fax usage.

Item	Description	Comments
Driver to fax	Yes (*) No When “No”, driver fax jobs are treated as PS jobs. This is the only way to disable “Driver to fax”	“No” must be specified in the evaluated configuration
Enable Fax Receive	Specifies whether incoming faxes may be received On (*) Off	Any configuration option may be specified, according to local policy concerning received faxes.
Fax Forwarding	Print (*; fax forwarding off, print all received faxes) Print and Forward Forward	”Print” must be configured in the evaluated configuration.
Holding Faxes	Defines conditions for holding incoming faxes.	In the evaluated configuration, the conditions must be configured so that all incoming faxes are held.
Enable Analog Receive	Off (*) On This parameter controls whether incoming faxes are supported when operating in fax server mode	Any configuration option may be specified, according to local policy concerning incoming faxes.

7.1.4.4.2 Email Settings Menu

The following table describes TSF data available for management under this menu. In the description field, “(*)” indicates the default setting for an item.

Table 30 - Email Settings Menu TSF Data

Item	Description	Comments
E-mail images sent as	Attachment (*) Web link	“Attachment” must be specified in the evaluated configuration

7.1.4.4.3 Print Settings/Setup Settings Menu

The following table describes TSF data available for management under this menu. In the description field, “(*)” indicates the default setting for an item.

Table 31 - Print Settings/Setup Settings Menu TSF Data

Item	Description	Comments
Job Waiting	On Off (*)	Any configuration option may be specified

7.1.4.5 Security Reset Jumper

The security reset jumper provides an alternate mechanism to manage some TSF data. The TOE contains a hardware jumper that can be used to:

- erase all security templates, building blocks, and access controls that a user has defined (i.e. the factory default configuration); OR
- force the value of each function access control to “No Security” (all security templates and building blocks are preserved but not applied to any function).

Administrators can secure the hardware containing the jumper with a Kensington lock. Or, to completely negate the effects of a jumper reset, an authorized administrator can configure the TOE to take no action based upon the jumper, effectively disabling this mechanism. Authorized administrators use the same configuration parameter to determine which of the two actions listed above is performed (if the mechanism is not disabled).

To perform a jumper reset operation, an administrator:

1. powers the device off;
2. removes the Kensington lock from the card cage;
3. removes the small plastic piece that covers a pair of the jumper’s pins;
4. replaces the plastic piece so that it covers the pins adjacent to its original position;
5. replaces and secures the Kensington lock on the card cage;
6. powers the device on.

The movement of the plastic piece from position A to position B on the jumper triggers the reset, not the specific positions. When the TOE is powered on, it labels the current position of the plastic piece as the “home” position. If, at the next power on or reset, the TOE detects that the plastic piece has moved from its previous “home” position to the “other” position, then it performs the jumper reset operation. After performing the operation, the TOE also relabels the “other” position as the “home” position.

7.1.5 Fax Separation

The Fax Separation function assures that the information on the TOE, and the information on the network to which the TOE is attached, is not exposed through the phone line that provides connectivity for the fax function. This function assures that only printable documents are accepted via incoming fax connections, and that the only thing transmitted over an outgoing fax connection (in the evaluated configuration) is a document that was scanned for faxing.

In the evaluated configuration, the USB ports capable of being used for document input are disabled and the ability to submit jobs via the network interface to be sent out the fax interface is disabled. Therefore, the only source for outgoing fax transmissions is the scanner. Control of the fax functionality is incorporated directly into the TOE’s firmware. The modem chip is in a mode that is more restrictive than Class 1 mode (the fax modem will not answer a data call), and relies on the TOE firmware for composition and transmission of fax data. The TOE firmware explicitly disallows the transmission of frames in data mode and allows for the sending and receiving of facsimile jobs only. There is no mechanism by which telnet, FTP, or other network protocols can be used over the analog fax line.

The fax modem is on a separate card from the network adapter to provide separation between the interfaces and is only capable of sending and receiving fax data. The modem and the network adapter are incapable of communicating directly with one another. The modem is designed only

for fax communications, thus preventing any type of remote configuration or management of the TOE over the fax line.

7.1.6 D.DOC Wiping

The TOE also overwrites RAM with a fixed pattern upon deallocation of any buffer used to hold user data.

7.1.7 Secure Communications

IPSec with ESP is required for all network datagram exchanges with remote IT systems. IPSec provide confidentiality, integrity and authentication of the endpoints. Supported encryption options for ESP are TDES and AES. SHA is supported for HMACs.

ISAKMP and IKE are used to establish the Security Association (SA) and session keys for the IPSec exchanges. Diffie-Hellman is used for IKEv1 Key Derivation Function, using Oakley Groups 2, 14, 15, 16, 17 or 18. This session key is stored in RAM. During the ISAKMP exchange, the TOE requires the remote IT system to provide a certificate and the RSA signature for it is validated.

If an incoming IP datagram does not use IPSec with ESP, the datagram is discarded.

If external accounts are defined, LDAP+GSSAPI is used for the exchanges with the LDAP server. Kerberos v5 with AES encryption is supported for exchanges with the LDAP server.

All session keys are stored in dynamic RAM. The TOE zeroizes the session keys by overwriting once with zeros when the sessions are terminated.

7.1.8 Self Test

During initial start-up, the TOE performs self tests on the hardware. The integrity of the security templates and building blocks is verified by ensuring that all the security templates specified in access controls exist and that all building blocks referenced by security templates exist. The integrity of the stored TSF executable code by calculating a hash of the executable code and comparing it to a saved value.

If any problems are detected with the hardware or stored TSF executable code, an appropriate error message is posted on the touch screen and operation is suspended. If a problem is detected with the integrity of the security templates or building blocks, the data is reset to the factory default, an audit log record is generated, an appropriate error message is posted on the touch screen, and further operation is suspended. In this case, a system restart will result in the system being operational with the factory default settings for the data.

7.1.9 Deviations From Allowed Cryptographic Standards

The following deviations from the Allowed Cryptographic Standards in *188 Scheme Crypto Policy* are noted:

1. Hashing: SHA-1 is supported for backward compatibility with remote systems.
2. HMAC: 160 bit keys with SHA-1 is supported for backward compatibility with remote systems.
3. Digital Signatures: RSASSA-PKCS-v1_5 with 1024 bit keys and SHA-1 is supported for backward compatibility with remote systems.

4. RSA key generation: ANSI X9.31 is used because the module was implemented prior to the publication of FIPS 186-3.

8. Protection Profile Claims

This chapter provides detailed information in reference to the Protection Profile conformance identification that appears in Chapter 2.

8.1 TOE Type Consistency

Both the PP and the TOE describe Hard Copy Devices.

8.2 Security Problem Definition Consistency

This ST claims demonstrable conformance to the referenced PP.

All of the assumptions, threats, and organizational security policies of the PP are included in the ST. One additional assumption (A.IPSEC) is included in the ST, resulting in the ST being more restrictive than the PP.

8.3 Security Objectives Consistency

This ST claims demonstrable conformance to the referenced PP.

All of the security objectives for the TOE and the operational environment (IT and non-IT) of the PP are included in the ST. The following additional security objectives are included in the ST:

1. O.I&A
2. O.MANAGE
3. O.TIME_STAMP
4. OE.I&A
5. OE.IPSEC
6. OE.TIME_STAMP

Therefore, the ST is more restrictive than the PP.

8.4 Security Functional Requirements Consistency

This ST claims demonstrable conformance to the referenced PP.

All of the SFRs from the claimed SFR packages are included in the ST with any fully or partially completed operations from the PP. Any remaining operations have been completed. The following notes apply to conformance of the SFRs in the ST.

1. The auditable events listed in the table with FAU_GEN.1 have been enumerated to match the specific events generated by the TOE. All of the events required by the PP are represented along with additional events.
2. SFRs from the FCS class have been added to the ST to address cryptographic functionality for IPsec, which are additions to the security functionality required by the PP.
3. FDP_ACC.1(a) and FDP_ACF.1(a) have been integrated with the individual instances of FDP_ACC.1 and FDP_ACF.1 from the applicable SFR packages of the PP into a single instance of FDP_ACC.1 and FDP_ACF.1 (still named Common Access Control SFP) that addresses all of the access control policies.

4. FIA_AFL.1 has been added to the ST to address to address authentication failure handling per application note 36 in the PP.
5. FIA_UAU.7 has been added to the ST to address to address protected authentication feedback per application note 36 in the PP.
6. FMT_MSA.1(a) and FMT_MSA.1(b) from the PP were combined into a single instance of FMT_MSA.1 since all the completed operations were identical.
7. FMT_MSA.3(a) and FMT_MSA.3(b) from the PP were combined into a single instance of FMT_MSA.3 since all the completed operations were identical.
8. FMT_MTD.1(a) and FMT_MTD.1(b) from the PP were combined into a single instance of FMT_MTD.1. Users (U.NORMAL) do not have any access to TSF data, and it was necessary to provide permission-level granularity of the administrator role for various TSF data access. Given these conditions, it was simpler to combine the instances of FMT_MTD.1 in the ST. In addition, Create was added as an operation in order to distinguish between creation and modification of entities.
9. For FMT_SMR.1, the TOE provides greater granularity of roles (based on individual permissions) than is required by the PP. The permission-based description has been provided in the ST, and an application note with the SFR defines the relationship between those permissions and the roles defined by the PP.
10. The instance of the FAU_GEN.1 in the SMI package has been integrated with the instance of FAU_GEN.1 in the common requirements.

8.5 Security Assurance Requirements Consistency

The ST assurance claims are identical to the assurance claims of the PP.

9. Rationale

This chapter provides the rationale for the selection of the IT security requirements, objectives, assumptions and threats. It shows that the IT security requirements are suitable to meet the security objectives, Security Requirements, and TOE security functional.

9.1 Rationale for IT Security Objectives

This section of the ST demonstrates that the identified security objectives are covering all aspects of the security needs. This includes showing that each threat, policy and assumption is addressed by a security objective.

The following table identifies for each threat, policy and assumption, the security objective(s) that address it.

Table 32 - Threats, Policies and Assumptions to Security Objectives Mapping

	O.AUDIT.LOGGED	O.CONF.NO_ALT	O.CONF.NO_DIS	O.DOC.NO_ALT	O.DOC.NO_DIS	O.FUNC.NO_ALT	O.INTERFACE.MANAGED	O.I&A	O.MANAGE	O.PROT.NO_ALT	O.SOFTWARE.VERIFIED	O.TIME_STAMP	O.USER.AUTHORIZED	OE.ADMIN.TRAINED	OE.ADMIN.TRUSTED	OE.AUDIT.REVIEWED	OE.AUDIT_ACCESS.AUTHORIZED	OE.AUDIT_STORAGE.PROTECTED	OE.I&A	OE.IPSEC	OE.INTERFACE.MANAGED	OE.PHYSICAL.MANAGED	OE.TIME_STAMP	OE.USER.AUTHORIZED	OE.USER.TRAINED
A.ACCESS.MANAGED																						X			
A.ADMIN.TRAINING														X											
A.ADMIN.TRUST															X										
A.IPSEC																				X					
A.USER.TRAINING																									X
T.CONF.ALT		X						X					X						X					X	
T.CONF.DIS			X					X					X						X					X	
T.DOC.ALT				X				X					X						X					X	
T.DOC.DIS					X			X					X						X					X	
T.FUNC.ALT						X		X					X						X					X	
T.PROT.ALT								X		X			X						X					X	
P.AUDIT.LOGGING	X											X				X	X	X					X		
P.INTERFACE.MANAGEMENT							X														X				
P.SOFTWARE.VERIFICATION											X														
P.USER.AUTHORIZATION								X	X				X						X					X	

9.1.1 Rationale Showing Threats to Security Objectives

The following table describes the rationale for the threat to security objectives mapping.

Table 33 - Threats to Security Objectives Rationale

T.TYPE	Security Objectives Rationale
T.CONF.ALT	<p>O.CONF.NO_ALT – The objective addresses the threat by requiring the TOE to protect against unauthorized alteration of TSF Confidential Data.</p> <p>O.I&A and OE.I&A – The objectives help address the threat by requiring I&A mechanisms so that appropriate authorizations may be associated with users.</p> <p>O.USER.AUTHORIZED and OE.USER.AUTHORIZED – The objectives help address the threat by requiring authorizations to be specified for users.</p>
T.CONF.DIS	<p>O.CONF.NO_DIS - The objective addresses the threat by requiring the TOE to protect against unauthorized disclosure of TSF Confidential Data.</p> <p>O.I&A and OE.I&A – The objectives help address the threat by requiring I&A mechanisms so that appropriate authorizations may be associated with users.</p> <p>O.USER.AUTHORIZED and OE.USER.AUTHORIZED – The objectives help address the threat by requiring authorizations to be specified for users.</p>
T.DOC.ALT	<p>O.DOC.NO_ALT - The objective addresses the threat by requiring the TOE to protect against unauthorized alteration of User Document Data.</p> <p>O.I&A and OE.I&A – The objectives help address the threat by requiring I&A mechanisms so that appropriate authorizations may be associated with users.</p> <p>O.USER.AUTHORIZED and OE.USER.AUTHORIZED – The objectives help address the threat by requiring authorizations to be specified for users.</p>
T.DOC.DIS	<p>O.DOC.NO_DIS - The objective addresses the threat by requiring the TOE to protect against unauthorized disclosure of User Document Data.</p> <p>O.I&A and OE.I&A – The objectives help address the threat by requiring I&A mechanisms so that appropriate authorizations may be associated with users.</p> <p>O.USER.AUTHORIZED and OE.USER.AUTHORIZED – The objectives help address the threat by requiring authorizations to be specified for users.</p>
T.FUNC.ALT	<p>O.FUNC.NO_ALT - The objective addresses the threat by requiring the TOE to protect against unauthorized alteration of User Function Data.</p> <p>O.I&A and OE.I&A – The objectives help address the threat by requiring I&A mechanisms so that appropriate authorizations may be associated with users.</p> <p>O.USER.AUTHORIZED and OE.USER.AUTHORIZED – The objectives help address the threat by requiring authorizations to be specified for users.</p>
T.PROT.ALT	<p>O.PROT.NO_ALT - The objective addresses the threat by requiring the TOE to protect against unauthorized alteration of TSF Protected Data.</p> <p>O.I&A and OE.I&A – The objectives help address the threat by requiring I&A mechanisms so that appropriate authorizations may be associated with users.</p> <p>O.USER.AUTHORIZED and OE.USER.AUTHORIZED – The objectives help address the threat by requiring authorizations to be specified for users.</p>

9.1.2 Rationale Showing Policies to Security Objectives

The following table describes the rationale for the policy to security objectives mapping.

Table 34 - Policies to Security Objectives Rationale

P.TYPE	Security Objectives Rationale
P.AUDIT.LOGGING	<p>O.AUDIT.LOGGED – The objective addresses the first part of the policy by requiring the TOE to generate audit records for TOE usage and security-relevant events, and to protect these records while they are inside the TSC.</p> <p>O.TIME_STAMP – The objective supports the policy by requiring the TOE to provide time stamps for the audit records when time is being tracked internally.</p> <p>OE.AUDIT.REVIEWED – The objective addresses the audit review portion of the policy by requiring timely review of the generated audit records.</p> <p>OE.AUDIT_ACCESS.AUTHORIZED – The objective supports the policy by requiring the operational environment to make the audit records available to authorized personnel only.</p> <p>OE.AUDIT_STORAGE.PROTECTED - The objective supports the policy by requiring the operational environment to protect the stored audit records from unauthorized access.</p> <p>OE.TIME_STAMP - The objective supports the policy by requiring the TOE to provide time stamps for the audit records when time is being supplied externally.</p>
P.INTERFACE.MANAGEMENT	<p>O.INTERFACE.MANAGED – The objective addresses the policy by requiring the TOE to enforce access to and usage of the TOE interfaces within the TSC.</p> <p>OE.INTERFACE.MANAGED – The objective addresses the policy by requiring the operational environment to control access to the TOE interfaces within the operational environment.</p>
P.SOFTWARE.VERIFICATION	<p>O.SOFTWARE.VERIFIED – The objective restates the policy.</p>
P.USER.AUTHORIZATION	<p>O.I&A and OE.I&A – The objectives help address the policy by requiring I&A mechanisms so that user authorizations may be restricted for users.</p> <p>O.MANAGE – The objective addresses the policy by requiring the TOE to provide management functions to administrators for configuration of user authorizations.</p> <p>O.USER.AUTHORIZED and OE.USER.AUTHORIZED – The objectives help address the policy by requiring authorizations to be specified for users.</p>

9.1.3 Rationale Showing Assumptions to Environment Security Objectives

The following table describes the rationale for the assumption to security objectives mapping.

Table 35 - Assumptions to Security Objectives Rationale

A.TYPE	Security Objectives Rationale
A.ACCESS.MANAGED	<p>OE.PHYSICAL.MANAGED – The objective addresses the assumption by requiring the TOE to be located in an area that restricts physical access.</p>
A.ADMIN.TRAINING	<p>OE.ADMIN.TRAINED – The objective restates the assumption.</p>
A.ADMIN.TRUST	<p>OE.ADMIN.TRUSTED – The objective addresses the assumption by requiring trust to be established in the administrators.</p>
A.IPSEC	<p>OE.IPSEC – All network systems with which the TOE communicates are required to support IPsec with ESP.</p>
A.USER.TRAINING	<p>OE.USER.TRAINED – The objective restates the assumption.</p>

9.2 Security Requirements Rationale

9.2.1 Rationale for Security Functional Requirements of the TOE Objectives

This section provides rationale for the Security Functional Requirements demonstrating that the SFRs are suitable to address the security objectives.

The following table identifies for each TOE security objective, the SFR(s) that address it.

Table 36 - SFRs to Security Objectives Mapping

	O.AUDIT.LOGGED	O.CONF.NO_ALT	O.CONF.NO_DIS	O.DOC.NO_ALT	O.DOC.NO_DIS	O.FUNC.NO_ALT	O.INTERFACE.MANAGED	O.I&A	O.MANAGE	O.PROT.NO_ALT	O.SOFTWARE.VERIFIED	O.TIME_STAMP	O.USER.AUTHORIZED
FAU_GEN.1	X												
FAU_GEN.2	X												
FCS_CKM.1		X	X	X	X	X				X			
FCS_CKM.4		X	X	X	X	X				X			
FCS_COP.1		X	X	X	X	X				X			
FDP_ACC.1(A)				X	X	X							X
FDP_ACC.1(B)				X	X								X
FDP_ACF.1(A)				X	X	X							X
FDP_ACF.1(B)				X	X								X
FDP_RIP.1					X								
FIA_AFL.1								X					
FIA_ATD.1								X					X
FIA_UAU.1							X	X					X
FIA_UAU.7								X					
FIA_UID.1	X	X	X	X	X	X	X	X		X			X
FIA_USB.1								X					X
FMT_MSA.1				X	X	X			X				X
FMT_MSA.3				X	X	X			X				X
FMT_MTD.1		X	X						X	X			
FMT_SMF.1		X	X	X	X	X			X	X			
FMT_SMR.1		X	X	X	X	X			X	X			X
FPT_FDI_EXP.1							X		X				
FPT_STM.1	X											X	
FPT_TST.1											X		
FTA_SSL.3							X		X				X
FTP_ITC.1		X	X	X	X	X				X			

The following table provides the detail of TOE security objective(s).

Table 37 - Security Objectives to SFR Rationale

Security Objective	SFR and Rationale
O.AUDIT.LOGGED	<p>FAU_GEN.1 addresses the objective by requiring the TOE to generate audit records for TOE usage and security relevant events.</p> <p>FAU_GEN.2 helps address the objective by requiring the audit records to include information associating a user with each event (if applicable).</p> <p>FIA_UID.1 supports audit policies by associating user identity with events.</p> <p>FPT_STM.1 supports audit policies by requiring time stamps associated with events.</p>
O.CONF.NO_ALT	<p>FCS_CKM.1, FCS_CKM.4 and FCS_COP.1 support the objective by requiring the TOE to provide key management and cryptographic functions to protect management interactions during network transmission.</p> <p>FIA_UID.1 supports access control and security roles by requiring user identification.</p> <p>FMT_MTD.1 specifies the rules for altering TSF Confidential Data.</p> <p>FMT_SMF.1 supports control of security attributes by requiring functions to control attributes.</p> <p>FMT_SMR.1 supports control of security attributes by requiring security roles.</p> <p>FTP_ITC.1 addresses the objective by requiring the TOE to provide trusted channels for the exchange of management traffic across the network.</p>
O.CONF.NO_DIS	<p>FCS_CKM.1, FCS_CKM.4 and FCS_COP.1 support the objective by requiring the TOE to provide key management and cryptographic functions to protect management interactions during network transmission.</p> <p>FIA_UID.1 supports access control and security roles by requiring user identification.</p> <p>FMT_MTD.1 specifies the rules for displaying TSF Confidential Data.</p> <p>FMT_SMF.1 supports control of security attributes by requiring functions to control attributes.</p> <p>FMT_SMR.1 supports control of security attributes by requiring security roles.</p> <p>FTP_ITC.1 addresses the objective by requiring the TOE to provide trusted channels for the exchange of management traffic across the network.</p>
O.DOC.NO_ALT	<p>FCS_CKM.1, FCS_CKM.4 and FCS_COP.1 support the objective by requiring the TOE to provide key management and cryptographic functions to protect the document data while transferred across the network.</p> <p>FDP_ACC.1(A) and FDP_ACC.1(B) specify the subjects, objects and operations that are controlled regarding User Document Data that must be protected for unauthorized alteration.</p> <p>FDP_ACF.1(A) and FDP_ACF.1(B) specify the security attributes and rules used to determine whether access is permitted.</p> <p>FIA_UID.1 supports access control and security roles by requiring user identification.</p> <p>FMT_MSA.1 and FMT_MSA.3 support the access control function by enforcing control of security attributes and their defaults.</p> <p>FMT_SMF.1 supports control of security attributes by requiring functions to control attributes.</p> <p>FMT_SMR.1 supports control of security attributes by requiring security roles.</p> <p>FTP_ITC.1 addresses the objective by requiring the TOE to provide trusted channels for the exchange of D.DOC across the network.</p>
O.DOC.NO_DIS	<p>FCS_CKM.1, FCS_CKM.4 and FCS_COP.1 support the objective by requiring the TOE to provide key management and cryptographic functions to protect the document data while transferred across the network.</p>

Security Objective	SFR and Rationale
	<p>FDP_ACC.1(A) and FDP_ACC.1(B) specify the subjects, objects and operations that are controlled regarding User Document Data that must be protected for unauthorized disclosure.</p> <p>FDP_ACF.1(A) and FDP_ACF.1(B) specify the security attributes and rules used to determine whether access is permitted.</p> <p>FDP_RIP.1 supports the objective by requiring the TOE to make unavailable any user document data when the RAM buffer holding the data is released.</p> <p>FIA_UID.1 supports access control and security roles by requiring user identification.</p> <p>FMT_MSA.1 and FMT_MSA.3 support the access control function by enforcing control of security attributes and their defaults.</p> <p>FMT_SMF.1 supports control of security attributes by requiring functions to control attributes.</p> <p>FMT_SMR.1 supports control of security attributes by requiring security roles.</p> <p>FTP_ITC.1 addresses the objective by requiring the TOE to provide trusted channels for the exchange of D.DOC across the network.</p>
O.FUNC.NO_ALT	<p>FCS_CKM.1, FCS_CKM.4 and FCS_COP.1 support the objective by requiring the TOE to provide key management and cryptographic functions to protect the function data while transferred across the network.</p> <p>FDP_ACC.1(A) specifies the subjects, objects and operations that are controlled regarding functions.</p> <p>FDP_ACF.1(A) specifies the security attributes and rules used to determine whether access is permitted.</p> <p>FIA_UID.1 supports access control and security roles by requiring user identification.</p> <p>FMT_MSA.1 and FMT_MSA.3 support the access control function by enforcing control of security attributes and their defaults.</p> <p>FMT_SMF.1 supports control of security attributes by requiring functions to control attributes.</p> <p>FMT_SMR.1 supports control of security attributes by requiring security roles.</p> <p>FTP_ITC.1 addresses the objective by requiring the TOE to provide trusted channels for the exchange of D.FUNC across the network.</p>
O.INTERFACE.MANAGED	<p>FIA_UAU.1 enforces management of external interfaces by requiring user authentication.</p> <p>FIA_UID.1 enforces management of external interfaces by requiring user identification.</p> <p>FPT_FDI_EXP.1 specifies that the TOE restrict the flow of information between the network and fax interfaces.</p> <p>FTA_SSL.3 enforces management of external interfaces by terminating inactive sessions.</p>
O.I&A	<p>FIA_AFL.1 supports the objective by requiring the TOE to lock accounts that experience an excessive number of failed authentication attempts, thereby providing protection from brute force password attacks.</p> <p>FIA_ATD.1 specifies the attributes associated with users, including information about failed authentication attempts.</p> <p>FIA_UAU.1 requires the TOE to provide I&A using Internal Accounts and the Backup Password.</p> <p>FIA_UAU.7 protects the confidentiality of passwords by specifying that only asterisks are echoed during password entry.</p> <p>FIA_UID.1 requires the TOE to provide I&A using Internal Accounts and the Backup Password.</p>

Security Objective	SFR and Rationale
	FIA_USB.1 specifies the attributes bound to a session upon successful completion of the I&A process.
O.MANAGE	<p>FPT_FDI_EXP.1 requires the TOE to provide management of direct forwarding from the original document handler input to the network interface.</p> <p>FMT_MSA.1 specifies the rules for management of the security attributes used in the access control decisions for user data.</p> <p>FMT_MSA.3 requires the TOE to impose restrictive default values for security attributes in all cases.</p> <p>FMT_MTD.1 specifies the rules for management of TSF data.</p> <p>FMT_SMF.1 specifies the management functions that the TOE provides and controls access to.</p> <p>FMT_SMR.1 specifies the roles (via user permissions) supported by the TOE.</p> <p>FTA_SSL.3 requires the TOE to automatically terminate idle sessions to mitigate against users taking advantage of existing sessions to gain unauthorized access.</p>
O.PROT.NO_ALT	<p>FCS_CKM.1, FCS_CKM.4 and FCS_COP.1 support the objective by requiring the TOE to provide key management and cryptographic functions to protect the management data while transferred across the network.</p> <p>FIA_UID.1 supports access control and security roles by requiring user identification.</p> <p>FMT_MTD.1 specifies the rules for displaying TSF Confidential Data.</p> <p>FMT_SMF.1 supports control of security attributes by requiring functions to control attributes.</p> <p>FMT_SMR.1 supports control of security attributes by requiring security roles.</p> <p>FTP_ITC.1 addresses the objective by requiring the TOE to provide trusted channels for the exchange of management traffic across the network.</p>
O.SOFTWARE.VERIFIED	FPT_TST.1 addresses the objective by requiring the TOE to validate the TSF data for security templates and building blocks.
O.TIME_STAMP	FPT_STM.1 requires the TOE to provide a reliable time source when time is configured to be supplied internally.
O.USER.AUTHORIZED	<p>FIA_ATD.1 supports authorization by associating security attributes with users.</p> <p>FIA_UID.1 and FIA_UAU.1 requires the TOE to successfully complete the I&A process before allowing users to perform anything other than the specified functions.</p> <p>FIA_USB.1 specifies the attributes bound to a sessions (and used in access control decisions) upon successful I&A.</p> <p>The security policies defined in FDP_ACC.1(A), FDP_ACC.1(B), FDP_ACF.1(A), FDP_ACF.1(B), FMT_MSA.1 and FMT_MSA.3 are required to be enforced by the TOE based on the security attributes bound to the subject (acting on behalf of the authenticated user).</p> <p>FMT_SMR.1 supports authorization by requiring security roles.</p> <p>FTA_SSL.3 enforces authorization by terminating inactive sessions.</p>

9.2.2 Security Assurance Requirements Rationale

The TOE stresses assurance through vendor actions that are within the bounds of current best commercial practice. The TOE provides, primarily via review of vendor-supplied evidence, independent confirmation that these actions have been competently performed.

The general level of assurance for the TOE is:

- A) Consistent with current best commercial practice for IT development and provides a product that is competitive against non-evaluated products with respect to functionality, performance, cost, and time-to-market.
- B) The TOE assurance also meets current constraints on widespread acceptance, by expressing its claims against EAL3 augmented with ALC_FLR.2 from part 3 of the Common Criteria.

9.3 TOE Summary Specification Rationale

This section demonstrates that the TOE's Security Functions completely and accurately meet the TOE SFRs.

The following tables provide a mapping between the TOE's Security Functions and the SFRs and the rationale.

Table 38 - SFRs to TOE Security Functions Mapping

	Audit Generation	I&A	Access Control	Management	Fax Separation	D.DOC Wiping	Secure Communication	Self Test
FAU_GEN.1	X							
FAU_GEN.2	X							
FCS_CKM.1							X	
FCS_CKM.4							X	
FCS_COP.1						X	X	
FDP_ACC.1(A)			X					
FDP_ACC.1(B)			X					
FDP_ACF.1(A)			X					
FDP_ACF.1(B)			X					
FDP_RIP.1						X		
FIA_AFL.1		X						
FIA_ATD.1		X						
FIA_UAU.1		X						
FIA_UAU.7		X						
FIA_UID.1		X						
FIA_USB.1		X						
FMT_MSA.1			X	X				
FMT_MSA.3				X				
FMT_MTD.1			X	X				
FMT_SMF.1				X				
FMT_SMR.1				X				
FPT_FDI_EXP.1			X	X	X			
FPT_STM.1	X							
FPT_TST.1								X
FTA_SSL.3		X						
FTP_ITC.1							X	

Table 39 - SFR to SF Rationale

SFR	SF and Rationale
FAU_GEN.1	Audit Generation addresses the SFR by specifying the audit event records that are generated and the content of the records.
FAU_GEN.2	Audit Generation addresses the SFR by specifying that the associated Username (if applicable) is included in audit event records.
FCS_CKM.1	Secure Communications requires generation of a certificate with an RSA public-private key pair.
FCS_CKM.4	Secure Communication requires zeroization of the session keys obtained by DH IKEv1 Key Derivation Function to be zeroized when the sessions terminate.
FCS_COP.1	Secure Communication requires the TOE to support TDES and AES for encryption, SHA for HMAC, RSA signatures, Diffie Hellman for IKEv1 Key Derivation Function, and a deterministic random bit generator.
FDP_ACC.1(A)	Access Control specifies the access controls placed on the user operations (objects) performed by users to access user data in the TSC.
FDP_ACC.1(B)	Access Control specifies the access controls placed on the user operations (objects) performed by users to access user data in the TSC.
FDP_ACF.1(A)	Access Control specifies the access controls placed on the user operations (objects) performed by users to access user data in the TSC.
FDP_ACF.1(B)	Access Control specifies the access controls placed on the user operations (objects) performed by users to access user data in the TSC.
FDP_RIP.1	D.DOC Wiping requires the TOE to overwrite RAM buffers upon their release that contain user data from incoming print, copy, scan and fax jobs.
FIA_AFL.1	Identification and Authentication requires the TOE to track failed login attempts for all authentication mechanisms. The limit on failed attempts that triggers an account lock is specified via the Login Restrictions TSF data.
FIA_ATD.1	Identification and Authentication requires the TOE to maintain the Username, Password, and Associated Groups security attributes for Internal Accounts and the Backup Password; and the failed authentication security attributes for all users.
FIA_UAU.1	Identification and Authentication requires the TOE to prevent access to restricted functions before the I&A process is successfully completed. Printing is never a restricted function; other functions may be restricted through access controls or enabling/disabling specific functions such as incoming faxes. The TOE is solely responsible for I&A for Internal Accounts and the Backup Password.
FIA_UAU.7	Identification and Authentication requires the TOE to echo asterisks or dots when a password is being entered for the I&A process for all mechanisms.
FIA_UID.1	Identification and Authentication requires the TOE to prevent access to restricted functions before the I&A process is successfully completed. Printing is never a restricted function; other functions may be restricted through access controls or enabling/disabling specific functions such as incoming faxes. The TOE is solely responsible for I&A for Internal Accounts and the Backup Password.
FIA_USB.1	Identification and Authentication requires the TOE to bind the Username and Password supplied during I&A with the subject upon successful I&A. The TOE also binds the list of associated groups (for Internal Accounts) and the building block name used for I&A.

SFR	SF and Rationale
FMT_MSA.1	<p>Management requires the TOE to provide the management capabilities for Usernames and Group memberships to the administrators that satisfy the access controls associated with the menus that control access to the data items.</p> <p>Access Control specifies that access be restricted and states the required configuration in the evaluated configuration.</p>
FMT_MSA.3	<p>Management requires the TOE to initially associate no group memberships with Internal Accounts.</p>
FMT_MTD.1	<p>Management requires the TOE to provide the management capabilities specified in the table to the administrators that satisfy the access controls associated with the menus that control access to the data items.</p> <p>Access Control specifies that access be restricted and states the required configuration in the evaluated configuration.</p>
FMT_SMF.1	<p>Management requires the TOE to provide capabilities to manage the specified functions.</p>
FMT_SMR.1	<p>Management requires the TOE to maintain roles via association of user permissions with users. Administrators are any users authorized access to restricted functionality, while normal users are all the other defined users.</p>
FPT_FDI_EXP.1	<p>Access Control requires the TOE to prevent data from being forwarded from the original document handler interfaces to the network interface in the evaluated configuration unless authorized by an administrator.</p> <p>Management provides an administrator with the ability to configure the TOE for operation in this manner.</p> <p>Fax Separation requires the TOE to prevent any forwarding of data between the fax interface and the network port.</p>
FPT_STM.1	<p>Audit Generation requires the TOE to provide time stamps for audit records when the TOE is configured for internal time.</p>
FPT_TST.1	<p>Self Test requires the TOE to perform tests on the hardware and validate the security templates and building blocks on each power up and reset.</p>
FTA_SSL.3	<p>Identification and Authentication states that sessions are automatically terminated by the TOE when the Home menu is not accessed within the configured timeout period.</p>
FTP_ITC.1	<p>Secure Communication requires the TOE to use a trusted channel for network communication with all remote IT systems.</p>