

STMicroelectronics

**ST33G platform ST33G1M2A1 maskset K8H0A  
version H  
with firmware revision 1.3.2,  
optional cryptographic library NESLIB 6.0.3,  
and optional library SFM 1.0.7  
Security Target for composition**

Common Criteria for IT security evaluation

SMD\_ST33G\_ST\_16\_002 Rev 01.02

October 2017

[www.st.com](http://www.st.com)



BLANK



# ST33G Platform Security Target for composition

## Common Criteria for IT security evaluation

### 1 Introduction

#### 1.1 Security Target reference

- 1 Document identification: ST33G platform ST33G1M2A1 maskset K8H0A version H, with firmware revision 1.3.2, optional cryptographic library NesLib 6.0.3, and optional library SFM 1.0.7 - SECURITY TARGET FOR COMPOSITION.
- 2 Version number: Rev 01.02, issued October 2017.
- 3 Registration: registered at ST Microelectronics under number SMD\_ST33G\_ST\_16\_002\_V01.02.

#### 1.2 Purpose

- 4 This document presents **the Security Target for composition (ST)** of the **ST33G platform ST33G1M2A1 maskset K8H0A version H** Security Integrated Circuit (IC), designed on the **ST33 platform of STMicroelectronics**, with Firmware rev 1.3.2, optional cryptographic library **NesLib** 6.0.3, and optional library **SFM** 1.0.7.
- 5 The precise reference of the Target of Evaluation (TOE) and the security IC features are given in [Section 3: TOE description](#).
- 6 A glossary of terms and abbreviations used in this document is given in [Appendix A: Glossary](#).

# Contents

<b>1</b>	<b>Introduction</b> .....	<b>3</b>
1.1	Security Target reference .....	3
1.2	Purpose .....	3
<b>2</b>	<b>Context</b> .....	<b>11</b>
<b>3</b>	<b>TOE description</b> .....	<b>12</b>
3.1	TOE identification .....	12
3.2	TOE overview .....	13
3.3	TOE life cycle .....	16
3.4	TOE environment .....	18
3.4.1	TOE Development Environment .....	18
3.4.2	TOE production environment .....	19
3.4.3	TOE operational environment .....	19
<b>4</b>	<b>Conformance claims</b> .....	<b>20</b>
4.1	Common Criteria conformance claims .....	20
4.2	PP Claims .....	20
4.2.1	PP Reference .....	20
4.2.2	PP Additions .....	20
4.2.3	PP Claims rationale .....	20
<b>5</b>	<b>Security problem definition</b> .....	<b>22</b>
5.1	Description of assets .....	22
5.2	Threats .....	24
5.3	Organisational security policies .....	25
5.4	Assumptions .....	26
5.4.1	Assumptions from the PP .....	26
<b>6</b>	<b>Security objectives</b> .....	<b>27</b>
6.1	Security objectives for the TOE .....	28
6.1.1	Objectives from the PP: .....	28
6.1.2	Additional objectives: .....	28

6.2	Security objectives for the environment	29
6.3	Security objectives rationale	29
6.3.1	TOE threat "Memory Access Violation"	31
6.3.2	TOE threat "Application code confidentiality"	31
6.3.3	TOE threat "Application data confidentiality"	31
6.3.4	TOE threat "Application code integrity"	31
6.3.5	TOE threat "Application data integrity"	32
6.3.6	Organisational security policy "Additional Specific Security Functionality"	32
6.3.7	Organisational security policy "Controlled loading of the Security IC Embedded Software"	32
6.3.8	Organisational security policy "Usage of hardware platform"	32
6.3.9	Organisational security policy "Treatment of user data"	33
<b>7</b>	<b>Security requirements</b>	<b>34</b>
7.1	Security functional requirements for the TOE	34
7.1.1	Security Functional Requirements from the Protection Profile	36
	Limited fault tolerance (FRU_FLT.2)	36
	Failure with preservation of secure state (FPT_FLS.1)	36
	Limited capabilities (FMT_LIM.1) [Test]	36
	Limited availability (FMT_LIM.2) [Test]	36
	Audit storage (FAU_SAS.1)	36
	Resistance to physical attack (FPT_PHP.3)	36
	Basic internal transfer protection (FDP_ITT.1)	37
	Basic internal TSF data transfer protection (FPT_ITT.1)	37
	Subset information flow control (FDP_IFC.1)	37
	Random number generation (FCS_RNG.1)	37
7.1.2	Additional Security Functional Requirements for the cryptographic services	38
	Cryptographic operation (FCS_COP.1)	38
	Cryptographic key generation (FCS_CKM.1)	40
7.1.3	Additional Security Functional Requirements for the memories protection	41
	Static attribute initialisation (FMT_MSA.3) [Memories]	41
	Management of security attributes (FMT_MSA.1) [Memories]	41
	Complete access control (FDP_ACC.2) [Memories]	41
	Security attribute based access control (FDP_ACF.1) [Memories]	41
	Specification of management functions (FMT_SMF.1) [Memories]	42

7.1.4	Additional Security Functional Requirements related to the Admin configuration	42
	Limited capabilities (FMT_LIM.1) [Admin]	42
	Limited availability (FMT_LIM.2) [Admin]	42
	Import of user data without security attributes (FDP_ITC.1) [Loader]	42
	Static attribute initialisation (FMT_MSA.3) [Loader]	43
	Management of security attributes (FMT_MSA.1) [Loader]	43
	Subset access control (FDP_ACC.1) [Loader]	43
	Security attribute based access control (FDP_ACF.1) [Loader]	43
	Specification of management functions (FMT_SMF.1) [Loader]	43
7.1.5	Additional Security Functional Requirements related to the Application Firewall	44
	Subset access control (FDP_ACC.1) [APPLI_FWL]	44
	Security attribute based access control (FDP_ACF.1) [APPLI_FWL]	44
	Static attribute initialisation (FMT_MSA.3) [APPLI_FWL]	44
7.2	TOE security assurance requirements	44
7.3	Refinement of the security assurance requirements	45
7.3.1	Refinement regarding functional specification (ADV_FSP)	46
7.3.2	Refinement regarding test coverage (ATE_COV)	47
7.4	Security Requirements rationale	47
7.4.1	Rationale for the Security Functional Requirements	47
7.4.2	Additional security objectives are suitably addressed	49
7.4.3	Additional security requirements are consistent	51
7.4.4	Dependencies of Security Functional Requirements	52
7.4.5	Rationale for the Assurance Requirements	55
<b>8</b>	<b>TOE summary specification</b>	<b>56</b>
8.1	Limited fault tolerance (FRU_FLT.2)	56
8.2	Failure with preservation of secure state (FPT_FLS.1)	56
8.3	Limited capabilities (FMT_LIM.1) [Test]	56
8.4	Limited capabilities (FMT_LIM.1) [Admin]	56
8.5	Limited availability (FMT_LIM.2) [Test] & [Admin]	57
8.6	Audit storage (FAU_SAS.1)	57
8.7	Resistance to physical attack (FPT_PHP.3)	57
8.8	Basic internal transfer protection (FDP_ITT.1), Basic internal TSF data transfer protection (FPT_ITT.1) & Subset information flow control (FDP_IFC.1)	57

8.9	Random number generation (FCS_RNG.1) . . . . .	57
8.10	Cryptographic operation: DES / 3DES operation (FCS_COP.1 [EDES]) .	58
8.11	Cryptographic operation: AES operation (FCS_COP.1 [AES]) . . . . .	58
8.12	Cryptographic operation: RSA operation (FCS_COP.1 [RSA]) if NesLib only . . . . .	58
8.13	Cryptographic operation: Elliptic Curves Cryptography operation (FCS_COP.1 [ECC]) if NesLib only . . . . .	59
8.14	Cryptographic operation: SHA-1 and SHA-2 operation (FCS_COP.1 [SHA]) if NesLib only . . . . .	59
8.15	Cryptographic operation: Keccak & SHA-3 operation (FCS_COP.1 [Keccak]) if NesLib only . . . . .	59
8.16	Cryptographic operation: Keccak-p operation (FCS_COP.1 [Keccak-p]) if NesLib only . . . . .	60
8.17	Cryptographic operation: Diffie-Hellman operation (FCS_COP.1 [Diffie- Hellman]) if NesLib only . . . . .	60
8.18	Cryptographic operation: DRBG operation (FCS_COP.1 [DRBG]) if NesLib only . . . . .	60
8.19	Cryptographic key generation: Prime generation (FCS_CKM.1 [Prime_generation]) if NesLib only . . . . .	61
8.20	Cryptographic key generation: RSA key generation (FCS_CKM.1 [RSA_key_generation]) if NesLib only . . . . .	61
8.21	Static attribute initialisation (FMT_MSA.3) [Memories] . . . . .	61
8.22	Management of security attributes (FMT_MSA.1) [Memories] & Specification of management functions (FMT_SMF.1) [Memories] . . . . .	61
8.23	Complete access control (FDP_ACC.2) [Memories] & Security attribute based access control (FDP_ACF.1) [Memories] . . . . .	61
8.24	Import of user data without security attributes (FDP_ITC.1) [Loader] . . .	62
8.25	Static attribute initialisation (FMT_MSA.3) [Loader] . . . . .	62
8.26	Management of security attributes (FMT_MSA.1) [Loader] & Specification of management functions (FMT_SMF.1) [Loader] . . . . .	62
8.27	Subset access control (FDP_ACC.1) [Loader] & Security attribute based access control (FDP_ACF.1) [Loader] . . . . .	62
8.28	Subset access control (FDP_ACC.1) [APPLI_FWL] & Security attribute based access control (FDP_ACF.1) [APPLI_FWL] . . . . .	62
8.29	Static attribute initialisation (FMT_MSA.3) [APPLI_FWL] . . . . .	62
<b>9</b>	<b>References . . . . .</b>	<b>63</b>

---

<b>Appendix A</b>	<b>Glossary</b> .....	<b>67</b>
A.1	Terms .....	67
A.2	Abbreviations .....	69
<b>10</b>	<b>Revision history</b> .....	<b>71</b>



## List of tables

Table 1.	TOE identification . . . . .	12
Table 2.	Derivative devices configuration possibilities . . . . .	12
Table 3.	Composite product life cycle phases . . . . .	17
Table 4.	Summary of security environment . . . . .	23
Table 5.	Summary of security objectives . . . . .	27
Table 6.	Security Objectives versus Assumptions, Threats or Policies . . . . .	30
Table 7.	Summary of functional security requirements for the TOE . . . . .	34
Table 8.	FCS_COP.1 iterations (cryptographic operations) . . . . .	38
Table 9.	FCS_CKM.1 iterations (cryptographic key generation). . . . .	40
Table 10.	TOE security assurance requirements . . . . .	45
Table 11.	Impact of EAL5 selection on BSI-PP-0035 refinements . . . . .	46
Table 12.	Security Requirements versus Security Objectives . . . . .	47
Table 13.	Dependencies of security functional requirements . . . . .	52
Table 14.	List of abbreviations . . . . .	68
Table 15.	Document revision history . . . . .	70

## List of figures

Figure 1.	ST33G Platform block diagram . . . . .	16
Figure 2.	Security IC life cycle . . . . .	18

## 2 Context

- 7 The Target of Evaluation (TOE) referred to in [Section 3: TOE description](#), is evaluated under the French IT Security Evaluation and Certification Scheme and is developed by the Secure Microcontrollers Division of STMicroelectronics (ST).
- 8 The assurance level of the performed Common Criteria (CC) IT Security Evaluation is EAL 5 augmented by ALC\_DVS.2 and AVA\_VAN.5.
- 9 The intent of this Security Target is to specify the Security Functional Requirements (SFRs) and Security Assurance Requirements (SARs) applicable to the TOE security IC, and to summarise its chosen TSF services and assurance measures.
- 10 This ST claims to be an instantiation of the "[Security IC Platform Protection Profile](#)" (PP) registered and certified under the reference [BSI-PP-0035](#) in the German IT Security Evaluation and Certification Scheme, **with the following augmentations**:
- 1 Addition #1: "Support of Cipher Schemes" from [AUG](#)
  - 1 Addition #4: "Area based Memory Access Control" from [AUG](#)
  - 1 Additions specific to this Security Target.
- The original text of this PP is typeset as [indicated here](#), its augmentations from [AUG](#) as [indicated here](#), when they are reproduced in this document.
- 11 Extensions introduced in this ST to the SFRs of the Protection Profile (PP) are **exclusively** drawn from the Common Criteria part 2 standard SFRs.
- 12 This ST makes various refinements to the above mentioned PP and [AUG](#). They are all properly identified in the text typeset as **indicated here**. The original text of the PP is repeated as scarcely as possible in this document for reading convenience. All PP identifiers have been however prefixed by their respective origin label: **BSI** for [BSI-PP-0035](#), **AUG1** for Addition #1 of [AUG](#) and **AUG4** for Addition #4 of [AUG](#).

## 3 TOE description

### 3.1 TOE identification

13 The Target of Evaluation (TOE) is the ST33G platform ST33G1M2A1 maskset K8H0A version H, with firmware rev 1.3.2, and the optional cryptographic library NesLib 6.0.3, and/or optional library SFM 1.0.7, with guidance documentation.

**Table 1. TOE identification**

IC Maskset name & major version	IC version	Master identification number <sup>(1)</sup>	Firmware revision	OST revision	Optional crypto library name & version <sup>(2)</sup>	Optional SFM library version
K8H0A <sup>(3)</sup>	H	01BCh (ST33G1M2A)	1.3.2	0022h	NesLib 6.0.3 0106000xh	1.0.7 00010007h

1. Part of the product information.
2. See the NesLib User Manual referenced in [Section 9](#).
3. This maskset K8H0A rev H corresponds to the product line K8M0.

- 14 The IC maskset name is the product hardware identification. The maskset major version is updated when the full maskset is changed (i.e. all layers of the maskset are changed at the same time). The IC version is updated for any change in hardware (i.e. part of the layers of the maskset) or in the OST. The Product name, IC version (i.e. ST33G platform version H), Firmware version and libraries versions fully identify the TOE.
- 15 Different derivative devices may be configured depending on the customer needs:
- 1 either by ST during the manufacturing or packaging process,
  - 1 or by the customer during the packaging, or composite product integration, or personalisation process.
- 16 They all share the same hardware design and the same maskset (denoted by the Master identification number). The Master identification number is unique for all product configurations.
- 17 The configuration of the derivative devices can impact the available NVM memory size, as detailed here below:

**Table 2. Derivative devices configuration possibilities**

Features	Possible values
NVM size	Selectable by 128 Kbytes granularity from 1280 Kbytes to 384 Kbytes

- 18 All combinations of different features values are possible and covered by this certification. All possible configurations can vary under a unique IC, and without impact on security.
- 19 All along the product life, the marking on the die, a set of accessible registers and a set of specific instructions allow the customer to check the product information, providing the identification elements, as listed in [Table 1: TOE identification](#), and the configuration elements as detailed in the Data Sheet and in the Firmware User Manual, referenced in [Section 9](#).

- 20 The rest of this document applies to all possible configurations of the TOE, with or without NesLib, except when a restriction is mentioned. For easier reading, the restrictions are typeset as [indicated here](#).

## 3.2 TOE overview

- 21 The TOE is a serial access Smartcard IC designed for secure mobile applications, based on the most recent generation of ARM® processors for embedded secure systems. Its SecurCore® SC300™ 32-bit RISC core is built on the Cortex™ M3 core with additional security features to help to protect against advanced forms of attacks.
- 22 The TOE offers a high-speed User Flash memory, an internally generated clock, an MPU, an internal true random number generator (TRNG) and hardware accelerators for advanced cryptographic functions.
- 23 The TOE features hardware accelerators for advanced cryptographic functions, with built-in countermeasures against side channel attacks. The AES (Advanced Encryption Standard) accelerator provides a high-performance implementation of AES-128, AES-192 and AES-256 algorithms. The 3-key triple DES accelerator (EDES+) supports efficiently the Data Encryption Standard (TDES [\[2\]](#)), enabling Cipher Block Chaining (CBC) mode, fast DES and triple DES computation. The NESCRYPT crypto-processor allows fast and secure implementation of the most popular public key cryptosystems with a high level of performance ([\[7\]](#), [\[9\]](#), [\[15\]](#),[\[16\]](#), [\[17\]](#), [\[18\]](#)).

As randomness is a key stone in many applications, the ST33G Platform features a highly reliable True Random Number Generator (TRNG), compliant with PTG.2 Class of AIS20/AIS31 [\[1\]](#) and directly accessible through dedicated registers.

This device includes the ARM® SecurCore® SC300™ memory protection unit (MPU), which enables the user to define its own region organization with specific protection and access permissions. The MPU can be used to enforce various protection models, ranging from a basic code dump prevention model up to a full application confinement model.

- 24 The TOE offers 3 communication channels to the external world: a serial communication interface fully compatible with the ISO/IEC 7816-3 standard, a single-wire protocol (SWP) interface for communication with a near-field communication (NFC) router in SIM/NFC applications, and an alternative and exclusive SPI Slave interface for communication in non-SIM applications.

- 25 In a few words, the ST33G Platform, offers a unique combination of high performances and very powerful features for high level security:
- 1 Die integrity,
  - 1 Monitoring of environmental parameters,
  - 1 Protection mechanisms against faults,
  - 1 AIS20/AIS31 class PTG.2 compliant True Random Number Generator,
  - 1 Memory protections,
  - 1 ISO 3309 CRC calculation block,
  - 1 EDES+ accelerator,
  - 1 AES accelerator,
  - 1 Library Protection Unit,
  - 1 Next Step Cryptography accelerator (NESCRYPT),
  - 1 optional cryptographic library,
  - 1 optional SFM library.
- 26 The OST ROM contains a Dedicated Software which provides full test capabilities (operating system for test, called "OST"), not accessible by the Security IC Embedded Software (ES), after TOE delivery.
- 27 The System ROM and ST NVM of the TOE contain a Dedicated Software which provides a reduced set of commands for final test (operating system for final test, called "FTOS"), not intended for the Security IC Embedded Software (ES) usage, and not available in User configuration.
- 28 The System ROM and ST NVM of the TOE contain a Dedicated Software which provides a set of protected commands for diagnosis purpose (field return analysis), reserved to STMicroelectronics., and not intended for the Security IC Embedded Software (ES) usage. This feature can be permanently deactivated by the customer.
- 29 The System ROM and ST NVM of the TOE contain a Dedicated Support Software called Secure Flash Loader, enabling to securely and efficiently download the Security IC Embedded Software into the NVM. It also allows the evaluator to load software into the TOE for test purpose. The Secure Flash Loader is not available in User configuration.
- 30 The System ROM and ST NVM of the TOE contain a Dedicated Support Software, which provides low-level functions (called Flash Drivers), enabling the Security IC Embedded Software (ES) to modify and manage the NVM contents. The Flash Drivers are available all through the product life-cycle.
- 31 The TOE optionally comprises a specific application in User NVM: this applicative Embedded Software is a cryptographic library called NesLib. NesLib is a cutting edge cryptographic library in terms of security and performance.


NesLib is embedded by the ES developer in his applicative code.

NesLib provides the most useful operations in public key algorithms and protocols, thanks to:

- 1 an asymmetric key cryptographic support module, supporting secure modular arithmetic with large integers, with specialized functions for Rivest, Shamir & Adleman Standard cryptographic algorithm (RSA [17]) and Diffie-Hellman [25],
- 1 an asymmetric key cryptographic support module that provides very efficient basic functions to build up protocols using Elliptic Curves Cryptography on prime fields  $GF(p)$

- with elliptic curves in short Weierstrass form [15], and provides support for ECDH key agreement [22] and ECDSA generation and verification [5].
- 1 a cryptographic support module that provides hash functions (SHA-1, SHA-2 [4]), SHA-3, Keccak and a toolbox for cryptography based on Keccak-p, the permutation underlying SHA-3 [23],
  - 1 a symmetric key cryptographic support module whose base algorithm is the Data Encryption Standard cryptographic algorithm (DES) [2],
  - 1 a symmetric key cryptographic support module whose base algorithm is the Advanced Encryption Standard cryptographic algorithm (AES) [6],
  - 1 support for a Deterministic Random Bit Generator [20],
  - 1 prime number generation and RSA key pairs generation [3].
- NesLib also provides basic services for memory access such as read, write, integrity checking, copy, exception management, protection against faults and random generation.
- 32 The TOE optionally comprises a specific application in User NVM: this applicative Embedded Software is a NVM management library called StoreKeeper Flash Management (SFM).  
SFM provides a specific convenient interface to the physical NVM.
- SFM is embedded by the ES developer in his applicative code.
- 33 The Security IC Embedded Software (ES) is in User NVM.
- The ES is not part of the TOE and is out of scope of the evaluation, except NesLib and SFM when they are embedded.**
- 34 The user guidance documentation, part of the TOE, consists of:
- 1 the product Data Sheet and die description,
  - 1 optionally the ST33G1M2 platform Technical Notes,
  - 1 the product family Security Guidance,
  - 1 the AIS31 user manuals,
  - 1 the Cortex M3 SC300 Technical Reference Manuals,
  - 1 the Firmware user manual,
  - 1 the Flash loader installation guide,
  - 1 optionally the NesLib user manual,
  - 1 optionally the SFM user manual..
- 35 The complete list of guidance documents is detailed in [Section 9](#).
- 36 [Figure 1](#) provides an overview of the ST33G Platform.

Figure 1. ST33G Platform block diagram

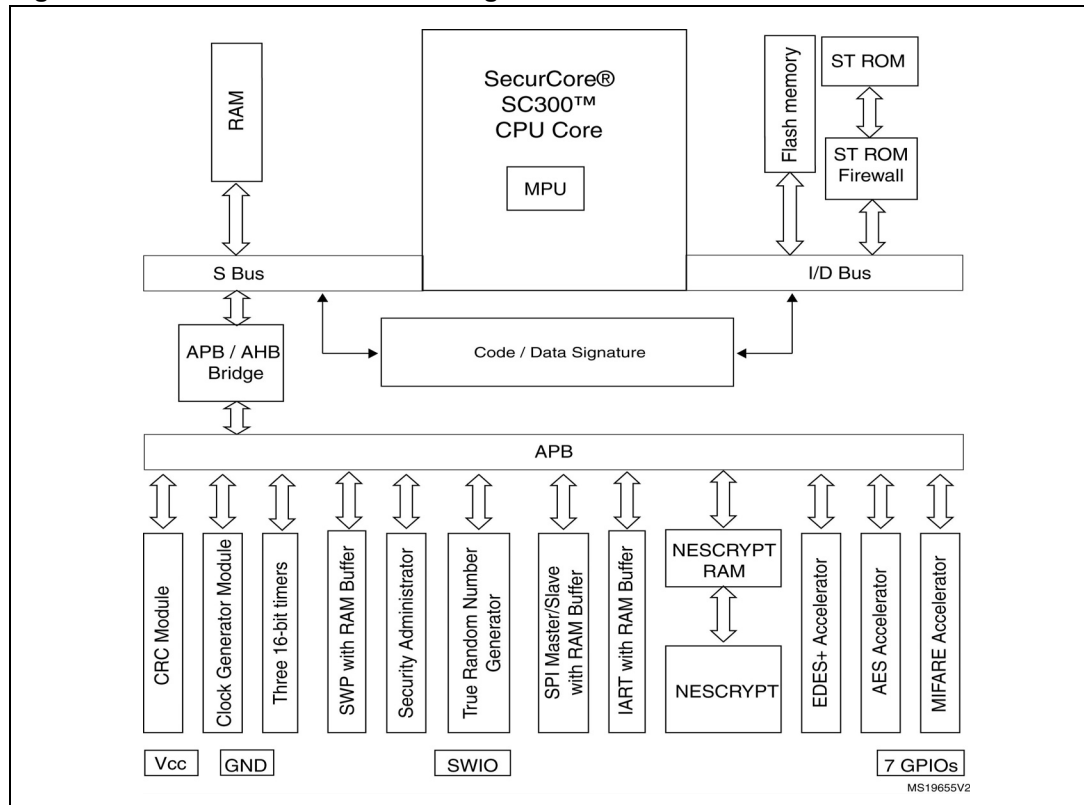

### 3.3 TOE life cycle

- 37 This Security Target is fully conform to the claimed PP. In the following, just a summary and some useful explanations are given. For complete details on the TOE life cycle, please refer to the [Security IC Platform Protection Profile \(BSI-PP-0035\)](#), section 1.2.3.
- 38 The composite product life cycle is decomposed into 7 phases. Each of these phases has the very same boundaries as those defined in the claimed protection profile.
- 39 The life cycle phases are summarized in [Table 3](#).
- 40 The limit of the evaluation corresponds to phases 2, 3 and optionally 4, including the delivery and verification procedures of phase 1, and the TOE delivery either to the IC packaging manufacturer or to the composite product integrator ; procedures corresponding to phases 1, 5, 6 and 7 are outside the scope of this evaluation.
- 41 In the following, the term "Composite product manufacturing" is uniquely used to indicate phases 1, optionally 4, 5 and 6 all together.  
This ST also uses the term "Composite product manufacturer" which includes all roles responsible of the TOE during phases 1, optionally 4, 5 and 6.
- 42 The TOE is delivered after Phase 3 in form of wafers or after Phase 4 in packaged form, depending on the customer's order.




- 43 In the following, the term "TOE delivery" is uniquely used to indicate:
- 1 after Phase 3 (or before Phase 4) if the TOE is delivered in form of wafers or sawn wafers (dice) or
  - 1 after Phase 4 (or before Phase 5) if the TOE is delivered in form of packaged products.
- 44 The TOE is only delivered in ADMIN (aka ISSUER) or USER configuration, depending on the customer's request.

**Table 3. Composite product life cycle phases**

Phase	Name	Description	Responsible party
1	IC embedded software development	security IC embedded software development specification of IC pre-personalization requirements	IC embedded software developer
2	IC development	IC design IC dedicated software development	IC developer: <b>ST</b>
3	IC manufacturing	integration and photomask fabrication IC production IC testing pre-personalisation	IC manufacturer: <b>ST</b> or <b>TSMC</b>
4	IC packaging	security IC packaging (and testing) pre-personalisation if necessary	IC packaging manufacturer: <b>ST</b> or <b>AMKOR</b> or <b>SMARTFLEX</b> or <b>STATSCHIPPAC</b> or <b>WINSTEK-STATSCHIPPAC</b>
5	Composite product integration	composite product finishing process composite product testing	Composite product manufacturer
6	Personalisation	composite product personalisation composite product testing	Personaliser
7	Operational usage	composite product usage by its issuers and consumers	End-consumer

- 45 The following figure shows the possible organization of the life cycle, adapted to the TOE which comprises programmable NVM. Thus, the Security IC Embedded Software may be loaded onto the TOE in phase 3, 4, 5 or 6, depending on customer's choice.

Figure 2. Security IC life cycle

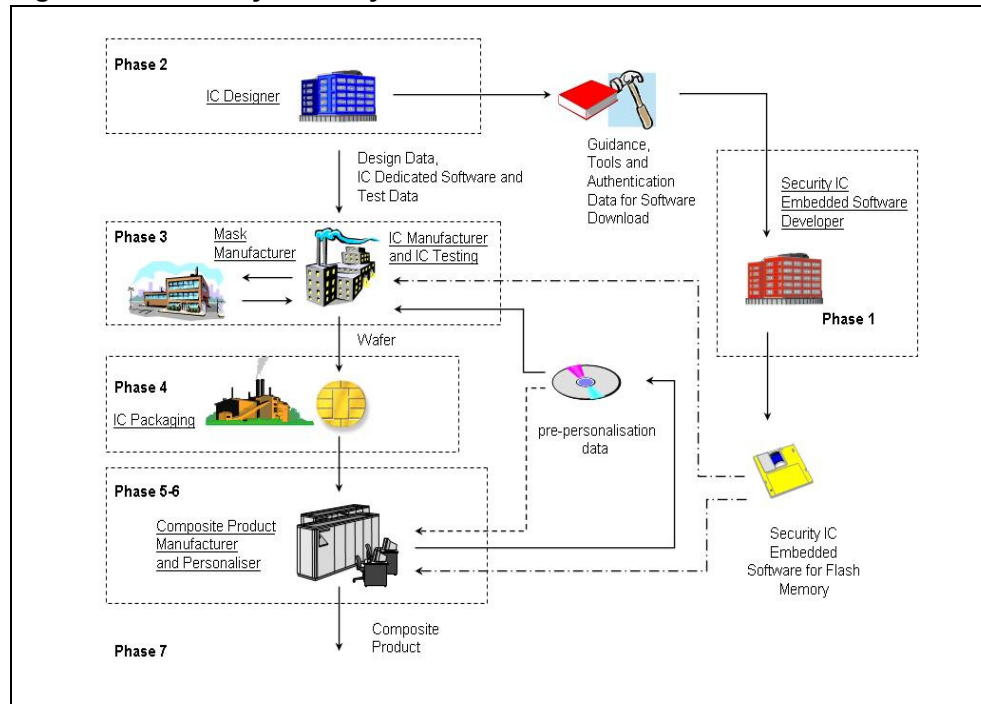

### 3.4 TOE environment

46 Considering the TOE, three types of environments are defined:

- 1 Development environment corresponding to phase 2,
- 1 Production environment corresponding to phase 3 and optionally 4,
- 1 Operational environment, including phase 1 and from phase 4 or 5 to phase 7.

#### 3.4.1 TOE Development Environment

47 To ensure security, the environment in which the development takes place is secured with controllable accesses having traceability. Furthermore, all authorised personnel involved fully understand the importance and the strict implementation of defined security procedures.

48 The development begins with the TOE's specification. All parties in contact with sensitive information are required to abide by Non-Disclosure Agreements.

49 Design and development of the IC then follows, together with the dedicated and engineering software and tools development. The engineers use secure computer systems (preventing unauthorised access) to make their developments, simulations, verifications and generation of the TOE's databases. Sensitive documents, files and tools, databases on tapes, and printed circuit layout information are stored in appropriate locked cupboards/safe. Of paramount importance also is the disposal of unwanted data (complete electronic erasures) and documents (e.g. shredding).

50 The development centres involved in the development of the TOE can be the following: **ST ROUSSET (FRANCE), ST SOPHIA (FRANCE), ST GRENOBLE (FRANCE), ST RENNES (FRANCE), ST ANG MO KIO (SINGAPORE), ST ZAVENTEM (BELGIUM).**

- 51 The IT support center involved in the development of the TOE can be **ST TUNIS (TUNISIA)**.
- 52 Reticules and photomasks are generated from the verified IC databases; the former are used in the silicon Wafer-fab processing. As reticules and photomasks are generated off-site, they are transported and worked on in a secure environment with accountability and traceability of all (good and bad) products. During the transfer of sensitive data electronically, procedures are established to ensure that the data arrive only at the destination and are not accessible at intermediate stages (e.g. stored on a buffer server where system administrators make backup copies).
- 53 The authorized sub-contractors involved in the TOE mask manufacturing can be **DNP (JAPAN)**, **DPE (ITALY)**, or **TSMC (TAIWAN)**.

### 3.4.2 TOE production environment

- 54 As high volumes of product commonly go through such environments, adequate control procedures are necessary to account for all product at all stages of production.
- 55 Production starts within the Wafer-fab; here the silicon wafers undergo the diffusion processing. Computer tracking at wafer level throughout the process is commonplace. The wafers are then taken into the test area. Testing of each TOE occurs to assure conformance with the device specification. The wafers are then delivered for assembly onto the composite products.
- 56 The authorized front-end plant involved in the manufacturing of the TOE can be **ST ROUSSET (FRANCE)** or **ST CROLLES (FRANCE)** or **TSMC (TAIWAN)**.
- 57 The authorized EWS (Electrical Wafer Sort) plant involved in the testing of the TOE can be **ST ROUSSET (FRANCE)** or **ST TOA PAYOH (SINGAPORE)**.
- 58 Wafers are then scribed and broken such as to separate the functional from the non-functional ICs. The latter is discarded in a controlled accountable manner. The good ICs are then packaged in phase 4, in a back-end plant. When testing, programming or deliveries are done offsite, ICs are transported and worked on in a secure environment with accountability and traceability of all (good and bad) products.
- 59 When the product is delivered after phase 4, the authorized back-end plants involved in the packaging of the TOE can be **ST BOUSKOURA (MOROCCO)**, **ST CALAMBA (THE PHILIPPINES)**, **ST MUAR (MALAYSIA)**, **ST SHENZHEN (CHINA)**, **ST GARDANNE (FRANCE)**, **AMKOR (THE PHILIPPINES or TAIWAN)**, **SMARTFLEX (SINGAPORE)**, **STATSCHIPPAC (SINGAPORE)**, **WINSTEK-STATSCHIPPAC (TAIWAN)**.
- 60 All back-end plants belonging to ST and listed in the above paragraph, plus **ST LOYANG (SINGAPORE)**, **ST ROUSSET (FRANCE)** and **ST ANG MO KIO (SINGAPORE)** can be involved for the logistics.

### 3.4.3 TOE operational environment

- 61 A TOE operational environment is the environment of phases 1, optionally 4, then 5 to 7.
- 62 At phases 1, 4, 5 and 6, the TOE operational environment is a controlled environment.
- 63 End-user environments (phase 7): composite products are used in a wide range of applications to assure authorised conditional access. Examples of such are Automotive and Machine to Machine (M2M). The end-user environment therefore covers a wide range of very different functions, thus making it difficult to avoid any attempt to abuse the TOE.

## 4 Conformance claims

### 4.1 Common Criteria conformance claims

64 The ST33G Platform Security Target claims to be conformant to the Common Criteria version 3.1 revision 4.

65 Furthermore it claims to be CC Part 2 ([CCMB-2012-09-002](#)) extended and CC Part 3 ([CCMB-2012-09-003](#)) conformant. The extended Security Functional Requirements are those defined in the [Security IC Platform Protection Profile \(BSI-PP-0035\)](#).

66 The assurance level for the ST33G Platform Security Target is **EAL 5** augmented by ALC\_DVS.2 and AVA\_VAN.5.

### 4.2 PP Claims

#### 4.2.1 PP Reference

67 The ST33G Platform Security Target claims strict conformance to the [Security IC Platform Protection Profile \(BSI-PP-0035\)](#), for the part of the TOE covered by this PP (Security IC), as required by this Protection Profile.

#### 4.2.2 PP Additions

68 The main refinements operated on the [BSI-PP-0035](#) are:

- 1 Addition #1: "Support of Cipher Schemes" from [AUG](#),
- 1 Addition #4: "Area based Memory Access Control" from [AUG](#),
- 1 Specific additions for the Secure Flash Loader
- 1 Specific additions for the LPU
- 1 Refinement of assurance requirements.

69 All refinements versus the PP are indicated with type setting text **as indicated here** or **here**, original text from the [BSI-PP-0035](#) being typeset **as indicated here**. Text originating in [AUG](#) is typeset **as indicated here**.

70 The security environment additions relative to the PP are summarized in [Table 4](#).

71 The additional security objectives relative to the PP are summarized in [Table 5](#).

72 A simplified presentation of the TOE Security Policy (TSP) is added.

73 The additional SFRs for the TOE relative to the PP are summarized in [Table 7](#).

74 The additional SARs relative to the PP are summarized in [Table 10](#).

#### 4.2.3 PP Claims rationale

75 The differences between this Security Target security objectives and requirements and those of [BSI-PP-0035](#), to which conformance is claimed, have been identified and justified in [Section 6](#) and in [Section 7](#). They have been recalled in the previous section.

76 In the following, the statements of the security problem definition, the security objectives, and the security requirements are consistent with those of the [BSI-PP-0035](#).

- 77 The security problem definition presented in [Section 5](#), clearly shows the additions to the security problem statement of the PP.
- 78 The security objectives rationale presented in [Section 6.3](#) clearly identifies modifications and additions made to the rationale presented in the [BSI-PP-0035](#).
- 79 The security requirements rationale presented in [Section 7.4](#) has been updated with respect to the Protection Profile.
- 80 All PP requirements have been shown to be satisfied in the extended set of requirements whose completeness, consistency and soundness have been argued in the rationale sections of the present document.

## 5 Security problem definition

81 This section describes the security aspects of the environment in which the TOE is intended to be used and addresses the description of the assets to be protected, the threats, the organisational security policies and the assumptions.

82 Note that the origin of each security aspect is clearly identified in the prefix of its label. Most of these security aspects can therefore be easily found in the [Security IC Platform Protection Profile \(BSI-PP-0035\)](#), section 3. Only those originating in *AUG*, and the one introduced in this Security Target, are detailed in the following sections.

83 A summary of all these security aspects and their respective conditions is provided in [Table 4](#).

### 5.1 Description of assets

84 The assets (related to standard functionality) to be protected are:

- 1 the User Data,
- 1 the Security IC Embedded Software, stored and in operation,
- 1 the security services provided by the TOE for the Security IC Embedded Software.

85 The user (consumer) of the TOE places value upon the assets related to high-level security concerns:

- SC1 integrity of User Data and of the Security IC Embedded Software (while being executed/processed and while being stored in the TOE's memories),
- SC2 confidentiality of User Data and of the Security IC Embedded Software (while being processed and while being stored in the TOE's memories)
- SC3 correct operation of the security services provided by the TOE for the Security IC Embedded Software.

86 According to the Protection Profile there is the following high-level security concern related to security service:

- SC4 deficiency of random numbers.

87 To be able to protect these assets the TOE shall protect its security functionality. Therefore critical information about the TOE shall be protected. Critical information includes:

- 1 logical design data, physical design data, IC Dedicated Software, and configuration data,
- 1 Initialisation Data and Pre-personalisation Data, specific development aids, test and characterisation related data, material for software development support, and photomasks.

Such information and the ability to perform manipulations assist in threatening the above assets.

88 The information and material produced and/or processed by **ST** in the TOE development and production environment (Phases 2 up to TOE delivery) can be grouped as follows:

- 1 logical design data,
- 1 physical design data,
- 1 IC Dedicated Software, Security IC Embedded Software, Initialisation Data and pre-personalisation Data,
- 1 specific development aids,
- 1 test and characterisation related data,
- 1 material for software development support, and
- 1 photomasks and products in any form

as long as they are generated, stored, or processed by **ST**.

89 Application note:  
 The TOE providing a functionality for Security IC Embedded Software secure loading into NVM, the ES is considered as User Data being stored in the TOE’s memories at this step, and the Protection Profile security concerns are extended accordingly.

**Table 4. Summary of security environment**

	Label	Title
TOE threats	BSI.T.Leak-Inherent	Inherent Information Leakage
	BSI.T.Phys-Probing	Physical Probing
	BSI.T.Malfunction	Malfunction due to Environmental Stress
	BSI.T.Phys-Manipulation	Physical Manipulation
	BSI.T.Leak-Forced	Forced Information Leakage
	BSI.T.Abuse-Func	Abuse of Functionality
	BSI.T.RND	Deficiency of Random Numbers
	AUG4.T.Mem-Access	Memory Access Violation
	T.Confid-Applic-Code	Application code confidentiality
	T.Confid-Applic-Data	Application data confidentiality
	T.Integ-Applic-Code	Application code integrity
	T.Integ-Applic-Data	Application data integrity
OSPs	BSI.P.Process-TOE	Protection during TOE Development and Production
	AUG1.P.Add-Functions	Additional Specific Security Functionality (Cipher Scheme Support)
	P.Controlled-ES-Loading	Controlled loading of the Security IC Embedded Software
	P.Plat-Appl	Usage of hardware platform
	P.Resp-Appl	Treatment of user data
Assumptions	BSI.A.Process-Sec-IC	Protection during Packaging, Finishing and Personalisation
	BSI.A.Plat-Appl	Usage of Hardware Platform
	BSI.A.Resp-Appl	Treatment of User Data

## 5.2 Threats

90 The threats are described in the [BSI-PP-0035](#), section 3.2. Only those originating in [AUG](#) are detailed in the following section.

BSI.T.Leak-Inherent	Inherent Information Leakage
BSI.T.Phys-Probing	Physical Probing
BSI.T.Malfunction	Malfunction due to Environmental Stress
BSI.T.Phys-Manipulation	Physical Manipulation
BSI.T.Leak-Forced	Forced Information Leakage
BSI.T.Abuse-Func	Abuse of Functionality
BSI.T.RND	Deficiency of Random Numbers
AUG4.T.Mem-Access	<p>Memory Access Violation:</p> <p>Parts of the <b>Security IC</b> Embedded Software may cause security violations by accidentally or deliberately accessing restricted data (which may include code). Any restrictions are defined by the security policy of the specific application context and must be implemented by the <b>Security IC</b> Embedded Software.</p> <p>Clarification: This threat does not address the proper definition and management of the security rules implemented by the Security IC Embedded Software, this being a software design and correctness issue. This threat addresses the reliability of the abstract machine targeted by the software implementation. To avert the threat, the set of access rules provided by this TOE should be undefeated if operated according to the provided guidance. The threat is not realized if the Security IC Embedded Software is designed or implemented to grant access to restricted information. It is realized if an implemented access denial is granted under unexpected conditions or if the execution machinery does not effectively control a controlled access.</p> <p>Here the attacker is expected to (i) take advantage of flaws in the design and/or the implementation of the TOE memory access rules (refer to BSI.T.Abuse-Func but for functions available after TOE delivery), (ii) introduce flaws by forcing operational conditions (refer to BSI.T.Malfunction) and/or by physical manipulation (refer to BSI.T.Phys-Manipulation). This attacker is expected to have a high level potential of attack.</p>

91 The following additional threats are related to Application protection.

T.Confid-Applic-Code	<p>Application code confidentiality:</p> <p>A sensitive application code may need to be protected against unauthorized disclosure. This relates to attacks at runtime to gain read or compare access to memory area where the sensitive application executable code is stored. The attacker executes an application to disclose code belonging to the sensitive application.</p>
T.Confid-Applic-Data	<p>Application data confidentiality:</p> <p>A sensitive application data may need to be protected against unauthorized disclosure. This relates to attacks at runtime to gain read or compare access to the sensitive application data by another application. For example, the attacker executes an application that tries to read data belonging to the sensitive application.</p>



T.Integ-Applic-Code	<p>Application code integrity:</p> <p>A sensitive application code may need to be protected against unauthorized modification. This relates to attacks at runtime to gain write access to memory area where the sensitive application executable code is stored. The attacker executes an application that tries to alter (part of) the sensitive application code.</p>
T.Integ-Applic-Data	<p>Application data integrity:</p> <p>A sensitive application data may need to be protected against unauthorized modification. This relates to attacks at runtime to gain write access to the sensitive application data by another application. The attacker executes an application that tries to alter (part of) the sensitive application data.</p>

### 5.3 Organisational security policies

- 92 The TOE provides specific security functionality that can be used by the **Security IC Embedded Software**. In the following specific security functionality is listed which is not derived from threats identified for the TOE's environment because it can only be decided in the context of the **Security IC** application, against which threats the **Security IC Embedded Software** will use the specific security functionality.
- 93 ST applies the Protection policy during TOE Development and Production ([BSI.P.Process-TOE](#)) as specified below.
- 94 **ST** applies the Additional Specific Security Functionality policy ([AUG1.P.Add-Functions](#)) as specified below.
- 95 New Organisational Security Policies (OSPs) are defined here below:
- 96 P.Controlled-ES-Loading is related to the capability provided by the TOE to load Security IC Embedded Software into the NVM after TOE delivery, in a controlled manner, during composite product manufacturing. The use of this capability is optional, and depends on the customer's production organization.
- 97 P.Plat-Appl and P.Resp-Appl are related to the ES that is part of the evaluation, and valid in case [NesLib](#) is embedded in the TOE.

<a href="#">BSI.P.Process-TOE</a>	<p>Protection during TOE Development and Production:</p> <p>An accurate identification <b>is</b> established for the TOE. This requires that each instantiation of the TOE carries this unique identification.</p>
-----------------------------------	--

AUG1.P.Add-Functions	<p>Additional Specific Security Functionality: The TOE shall provide the following specific security functionality to the <b>Security IC Embedded Software</b>:</p> <ul style="list-style-type: none"> <li>– Data Encryption Standard (DES),</li> <li>– Triple Data Encryption Standard (3DES),</li> <li>– Advanced Encryption Standard (AES),</li> <li>– Rivest-Shamir-Adleman (RSA): when NesLib is embedded only,</li> <li>– <b>Elliptic Curves Cryptography on GF(p)</b>: when NesLib is embedded only,</li> <li>– <b>Secure Hashing (SHA-1, SHA-224, SHA-256, SHA-384, SHA-512)</b>: when NesLib is embedded only,</li> <li>– <b>Keccak</b>: when NesLib is embedded only,</li> <li>– <b>Keccak-p</b>: when NesLib is embedded only,</li> <li>– <b>Diffie-Hellman</b>: when NesLib is embedded only,</li> <li>– <b>Deterministic Random Bit Generator</b>: when NesLib is embedded only,</li> <li>– <b>Prime Number Generation</b>: when NesLib is embedded only.</li> </ul> <p>Note that DES and triple DES with two keys are no longer recommended as encryption functions in the context of smart card applications. Hence, Security IC Embedded Software may need to use triple DES with three keys to achieve a suitable strength.</p> <p>Note that SHA-1 is no longer recommended as a cryptographic function. Hence, Security IC Embedded Software may need to use another SHA to achieve a suitable strength.</p>
P.Controlled-ES-Loading	<p>Controlled loading of the Security IC Embedded Software:</p> <p>The TOE shall provide the capability to import the Security IC Embedded Software into the NVM, in a controlled manner, either before TOE delivery, under ST authority, either after TOE delivery, under the composite product manufacturer authority. This capability is not available in User configuration.</p>
P.Plat-Appl	<p>Usage of hardware platform:</p> <p>The Security IC Embedded Software, part of the TOE, uses the TOE hardware platform according to the assumption A.Plat-Appl defined in <a href="#">BSI-PP-0035</a>.</p>
P.Resp-Appl	<p>Treatment of user data:</p> <p>The Security IC Embedded Software, part of the TOE, treats user data according to the assumption A.Resp-Appl defined in <a href="#">BSI-PP-0035</a>.</p>

## 5.4 Assumptions

### 5.4.1 Assumptions from the PP

98 The assumptions are described in the [BSI-PP-0035](#), section 3.4.

BSI.A.Process-Sec-IC	Protection during Packaging, Finishing and Personalisation
BSI.A.Plat-Appl	Usage of Hardware Platform
BSI.A.Resp-Appl	Treatment of User Data

## 6 Security objectives

- 99 The security objectives of the TOE cover principally the following aspects:
- 1 integrity and confidentiality of assets,
  - 1 protection of the TOE and associated documentation during development and production phases,
  - 1 provide random numbers,
  - 1 provide cryptographic support and access control functionality.

100 A summary of all security objectives is provided in [Table 5](#).

101 Note that the origin of each objective is clearly identified in the prefix of its label. Most of these security aspects can therefore be easily found in the protection profile. Only those originating in [AUG](#), and the ones introduced in this Security Target, are detailed in the following sections.

**Table 5. Summary of security objectives**

	Label	Title
TOE	BSI.O.Leak-Inherent	Protection against Inherent Information Leakage
	BSI.O.Phys-Probing	Protection against Physical Probing
	BSI.O.Malfunction	Protection against Malfunctions
	BSI.O.Phys-Manipulation	Protection against Physical Manipulation
	BSI.O.Leak-Forced	Protection against Forced Information Leakage
	BSI.O.Abuse-Func	Protection against Abuse of Functionality
	BSI.O.Identification	TOE Identification
	BSI.O.RND	Random Numbers
	AUG1.O.Add-Functions	Additional Specific Security Functionality
	AUG4.O.Mem-Access	<b>Dynamic</b> Area based Memory Access Control
	O.Controlled-ES-Loading	Controlled loading of the Security IC Embedded Software
	O.Plat-Appl	Usage of hardware platform
	O.Resp-Appl	Treatment of user data
O.Firewall	Application firewall	
Environments	BSI.OE.Plat-Appl	Usage of Hardware Platform
	BSI.OE.Resp-Appl	Treatment of User Data
	BSI.OE.Process-Sec-IC	Protection during composite product manufacturing

## 6.1 Security objectives for the TOE

### 6.1.1 Objectives from the PP:

BSI.O.Leak-Inherent	Protection against Inherent Information Leakage
BSI.O.Phys-Probing	Protection against Physical Probing
BSI.O.Malfunction	Protection against Malfunctions
BSI.O.Phys-Manipulation	Protection against Physical Manipulation
BSI.O.Leak-Forced	Protection against Forced Information Leakage
BSI.O.Abuse-Func	Protection against Abuse of Functionality
BSI.O.Identification	TOE Identification
BSI.O.RND	Random Numbers

### 6.1.2 Additional objectives:

AUG1.O.Add-Functions	<p>Additional Specific Security Functionality: The TOE must provide the following specific security functionality to the <b>Security IC</b> Embedded Software:</p> <ul style="list-style-type: none"> <li>– Data Encryption Standard (DES),</li> <li>– Triple Data Encryption Standard (3DES),</li> <li>– Advanced Encryption Standard (AES),</li> <li>– Rivest-Shamir-Adleman (RSA): when NesLib is embedded only,</li> <li>– <b>Elliptic Curves Cryptography on GF(p)</b>: when NesLib is embedded only,</li> <li>– <b>Secure Hashing (SHA-1, SHA-224, SHA-256, SHA-384, SHA-512)</b>: when NesLib is embedded only,</li> <li>– <b>Keccak</b>: when NesLib is embedded only,</li> <li>– <b>Keccak-p</b>: when NesLib is embedded only,</li> <li>– <b>Diffie-Hellman</b>: when NesLib is embedded only,</li> <li>– <b>Deterministic Random Bit Generator</b>: when NesLib is embedded only,</li> <li>– <b>Prime Number Generation</b>: when NesLib is embedded only.</li> </ul> <p>Note that DES and triple DES with two keys are no longer recommended as encryption functions in the context of smart card applications. Hence, Security IC Embedded Software may need to use triple DES with three keys to achieve a suitable strength.</p> <p>Note that SHA-1 is no longer recommended as a cryptographic function. Hence, Security IC Embedded Software may need to use another SHA to achieve a suitable strength.</p>
AUG4.O.Mem-Access	<p><b>Dynamic</b> Area based Memory Access Control: The TOE must provide the <b>Security IC</b> Embedded Software with the capability to define <b>dynamic memory segmentation and protection</b>. The TOE must then enforce <b>the defined access restrictions</b> so that access of software to memory areas is controlled as required, for example, in a multi-application environment.</p>

O.Controlled-ES-Loading	<p>Controlled loading of the Security IC Embedded Software: The TOE must provide the capability to load the Security IC Embedded Software into the NVM, either before TOE delivery, under ST authority, either after TOE delivery, under the composite product manufacturer authority. The TOE must restrict the access to these features. The TOE must provide control means to check the integrity of the loaded user data. This capability is not available in User configuration.</p>
O.Plat-Appl	<p>Usage of hardware platform: To ensure that the TOE is used in a secure manner the Security IC Embedded Software, part of the TOE, shall be designed so that the requirements from the following documents are met: (i) hardware data sheet for the TOE, (ii) data sheet of the IC dedicated software of the TOE, (iii) TOE application notes, other guidance documents, and (iii) findings of the TOE evaluation reports relevant for the Security IC Embedded Software.</p>
O.Resp-Appl	<p>Treatment of user data: Security relevant User Data (especially cryptographic keys) are treated by the Security IC Embedded Software as required by the security needs of the specific application context. For example the Security IC Embedded Software will not disclose security relevant user data to unauthorised users or processes when communicating with a terminal.</p>
O.Firewall	<p>Application firewall: The TOE shall ensure isolation of data and code between a Protected Application and the other applications. An application shall not read, write, compare any piece of data or code belonging to the Protected Application.</p>

## 6.2 Security objectives for the environment

102 Security Objectives for the Security IC Embedded Software development environment (phase 1):

[BSI.OE.Plat-Appl](#)      [Usage of Hardware Platform](#)  
[BSI.OE.Resp-Appl](#)      [Treatment of User Data](#)

103 Security Objectives for the operational Environment (phase 4 up to 6):

[BSI.OE.Process-Sec-IC](#)   [Protection during composite product manufacturing](#)

## 6.3 Security objectives rationale

104 The main line of this rationale is that the inclusion of all the security objectives of the [BSI-PP-0035](#) protection profile, together with those in [AUG](#), and those introduced in this ST, guarantees that all the security environment aspects identified in [Section 5](#) are addressed by the security objectives stated in this chapter.

- 105 Thus, it is necessary to show that:
- 1 security environment aspects from [AUG](#), and from this ST, are addressed by security objectives stated in this chapter,
  - 1 security objectives from [AUG](#), and from this ST, are suitable (i.e. they address security environment aspects),
  - 1 security objectives from [AUG](#), and from this ST, are consistent with the other security objectives stated in this chapter (i.e. no contradictions).
- 106 The selected augmentations from [AUG](#) introduce the following security environment aspects:
- 1 TOE threat "[Memory Access Violation, \(AUG4.T.Mem-Access\)](#)",
  - 1 organisational security policy "[Additional Specific Security Functionality, \(AUG1.P.Add-Functions\)](#)".
- 107 The augmentations made in this ST introduce the following security environment aspects:
- 1 TOE threats "[Application code confidentiality, \(T.Confid-Applic-Code\)](#)", "[Application data confidentiality, \(T.Confid-Applic-Data\)](#)", "[Application code integrity, \(T.Integ-Applic-Code\)](#)", and "[Application data integrity, \(T.Integ-Applic-Data\)](#)".
  - 1 organisational security policies "[Controlled loading of the Security IC Embedded Software, \(P.Controlled-ES-Loading\)](#)", "[Usage of hardware platform, \(P.Plat-App\)](#)", and "[Treatment of user data, \(P.Resp-App\)](#)".
- 108 The justification of the additional policies, and additional threats provided in the next subsections shows that they do not contradict to the rationale already given in the protection profile BSI-PP-0035 for the assumptions, policy and threats defined there.

**Table 6. Security Objectives versus Assumptions, Threats or Policies**

Assumption, Threat or Organisational Security Policy	Security Objective	Notes
<a href="#">BSI.A.Plat-App</a>	<a href="#">BSI.OE.Plat-App</a>	Phase 1
<a href="#">BSI.A.Resp-App</a>	<a href="#">BSI.OE.Resp-App</a>	Phase 1
<a href="#">BSI.P.Process-TOE</a>	<a href="#">BSI.O.Identification</a>	Phase 2-3
<a href="#">BSI.A.Process-Sec-IC</a>	<a href="#">BSI.OE.Process-Sec-IC</a>	Phase 4-6
<a href="#">P.Controlled-ES-Loading</a>	<a href="#">O.Controlled-ES-Loading</a>	Phase 4-6
<a href="#">AUG1.P.Add-Functions</a>	<a href="#">AUG1.O.Add-Functions</a>	
<a href="#">P.Plat-App</a>	<a href="#">O.Plat-App</a>	
<a href="#">P.Resp-App</a>	<a href="#">O.Resp-App</a>	
<a href="#">BSI.T.Leak-Inherent</a>	<a href="#">BSI.O.Leak-Inherent</a>	
<a href="#">BSI.T.Phys-Probing</a>	<a href="#">BSI.O.Phys-Probing</a>	
<a href="#">BSI.T.Malfunction</a>	<a href="#">BSI.O.Malfunction</a>	
<a href="#">BSI.T.Phys-Manipulation</a>	<a href="#">BSI.O.Phys-Manipulation</a>	
<a href="#">BSI.T.Leak-Forced</a>	<a href="#">BSI.O.Leak-Forced</a>	
<a href="#">BSI.T.Abuse-Func</a>	<a href="#">BSI.O.Abuse-Func</a>	
<a href="#">BSI.T.RND</a>	<a href="#">BSI.O.RND</a>	
<a href="#">AUG4.T.Mem-Access</a>	<a href="#">AUG4.O.Mem-Access</a>	

Table 6. Security Objectives versus Assumptions, Threats or Policies (continued)

Assumption, Threat or Organisational Security Policy	Security Objective	Notes
<a href="#">T.Confid-Applic-Code</a>	<a href="#">O.Firewall</a>	
<a href="#">T.Confid-Applic-Data</a>	<a href="#">O.Firewall</a>	
<a href="#">T.Integ-Applic-Code</a>	<a href="#">O.Firewall</a>	
<a href="#">T.Integ-Applic-Data</a>	<a href="#">O.Firewall</a>	

### 6.3.1 TOE threat "Memory Access Violation"

109 The justification related to the threat "Memory Access Violation, ([AUG4.T.Mem-Access](#))" is as follows:

110 According to [AUG4.O.Mem-Access](#) the TOE must enforce the **dynamic memory segmentation and protection** so that access of software to memory areas is controlled. Any restrictions are to be defined by the **Security IC** Embedded Software. Thereby security violations caused by accidental or deliberate access to restricted data (which may include code) can be prevented (refer to [AUG4.T.Mem-Access](#)). The threat [AUG4.T.Mem-Access](#) is therefore removed if the objective is met.

111 The added objective for the TOE [AUG4.O.Mem-Access](#) does not introduce any contradiction in the security objectives for the TOE.

### 6.3.2 TOE threat "Application code confidentiality"

112 The justification related to the threat "Application code confidentiality, ([T.Confid-Applic-Code](#))" is as follows:

113 Since [O.Firewall](#) requires that the TOE ensures isolation of code between the Protected Application and the other applications, the code of the Protected Application is protected against unauthorised disclosure, therefore [T.Confid-Applic-Code](#) is covered by [O.Firewall](#).

114 The added objective for the TOE [O.Firewall](#) does not introduce any contradiction in the security objectives for the TOE.

### 6.3.3 TOE threat "Application data confidentiality"

115 The justification related to the threat "Application data confidentiality, ([T.Confid-Applic-Data](#))" is as follows:

116 Since [O.Firewall](#) requires that the TOE ensures isolation of data between the Protected Application and the other applications, the data of the Protected Application is protected against unauthorised disclosure, therefore [T.Confid-Applic-Data](#) is covered by [O.Firewall](#).

### 6.3.4 TOE threat "Application code integrity"

117 The justification related to the threat "Application code integrity, ([T.Integ-Applic-Code](#))" is as follows:

118 The threat is related to the alteration of the code of the Protected Application by an attacker. [O.Firewall](#) requires that the TOE ensures isolation of code between the Protected Application and the other applications, thus protecting the code of the Protected Application against unauthorised modification. Therefore the threat is covered by [O.Firewall](#).

### 6.3.5 TOE threat "Application data integrity"

119 The justification related to the threat "Application data integrity, (*T.Integ-Applic-Data*)" is as follows:

120 The threat is related to the alteration of the data of the Protected Application by an attacker. Since *O.Firewall* requires that the TOE ensures complete isolation of data between the Protected Application and the other applications, the data of the Protected Application is protected against unauthorised modification, therefore *T.Integ-Applic-Data* is covered by *O.Firewall*.

### 6.3.6 Organisational security policy "Additional Specific Security Functionality"

121 The justification related to the organisational security policy "Additional Specific Security Functionality, (*AUG1.P.Add-Functions*)" is as follows:

122 Since *AUG1.O.Add-Functions* requires the TOE to implement exactly the same specific security functionality as required by *AUG1.P.Add-Functions*, **and in the very same conditions**, the organisational security policy is covered by the objective.

123 Nevertheless the security objectives *BSI.O.Leak-Inherent*, *BSI.O.Phys-Probing*, *BSI.O.Malfunction*, *BSI.O.Phys-Manipulation* and *BSI.O.Leak-Forced* define how to implement the specific security functionality required by *AUG1.P.Add-Functions*. (Note that these objectives support that the specific security functionality is provided in a secure way as expected from *AUG1.P.Add-Functions*.) Especially *BSI.O.Leak-Inherent* and *BSI.O.Leak-Forced* refer to the protection of confidential data (User Data or TSF data) in general. User Data are also processed by the specific security functionality required by *AUG1.P.Add-Functions*.

124 The added objective for the TOE *AUG1.O.Add-Functions* does not introduce any contradiction in the security objectives for the TOE.

### 6.3.7 Organisational security policy "Controlled loading of the Security IC Embedded Software"

125 The justification related to the organisational security policy "Controlled loading of the Security IC Embedded Software, (*P.Controlled-ES-Loading*)" is as follows:

126 Since *O.Controlled-ES-Loading* requires the TOE to implement exactly the same specific security functionality as required by *P.Controlled-ES-Loading*, and in the very same conditions, the organisational security policy is covered by the objective.

127 The added objective for the TOE *O.Controlled-ES-Loading* does not introduce any contradiction in the security objectives.

### 6.3.8 Organisational security policy "Usage of hardware platform"

128 The justification related to the organisational security policy "Usage of hardware platform, (*P.Plat-AppI*)" is as follows:

129 The policy states that the Security IC Embedded Software included in the TOE, uses the TOE hardware according to the respective PP assumption *BSI.A.Plat-AppI*. *O.Plat-AppI* has the same objective as *BSI.OE.Plat-AppI* defined in the PP. Thus, the objective *O.Plat-AppI* covers the policy *P.Plat-AppI*.



130 The added objective for the TOE *O.Plat-AppI* does not introduce any contradiction in the security objectives.

### 6.3.9 Organisational security policy "Treatment of user data"

131 The justification related to the organisational security policy "Treatment of user data, (*P.Resp-AppI*)" is as follows:

132 In analogy to *P.Plat-AppI*, the policy *P.Resp-AppI* is covered in the same way by the objective *O.Resp-AppI*.

133 The added objective for the TOE *O.Resp-AppI* does not introduce any contradiction in the security objectives.

## 7 Security requirements

134 This chapter on security requirements contains a section on security functional requirements (SFRs) for the TOE ([Section 7.1](#)), a section on security assurance requirements (SARs) for the TOE ([Section 7.2](#)), a section on the refinements of these SARs ([Section 7.3](#)) as required by the "[BSI-PP-0035](#)" Protection Profile. This chapter includes a section with the security requirements rationale ([Section 7.4](#)).

### 7.1 Security functional requirements for the TOE

135 Security Functional Requirements (SFRs) from the "[BSI-PP-0035](#)" Protection Profile (PP) are drawn from [CCMB-2012-09-002](#), except the following SFRs, that are **extensions** to [CCMB-2012-09-002](#):

- 1 **FCS\_RNG** Generation of random numbers,
- 1 **FMT\_LIM** Limited capabilities and availability,
- 1 **FAU\_SAS** Audit data storage.

The reader can find their certified definitions in the text of the "[BSI-PP-0035](#)" Protection Profile.

136 All extensions to the SFRs of the "[BSI-PP-0035](#)" Protection Profiles (PPs) are **exclusively** drawn from [CCMB-2012-09-002](#).

137 All iterations, assignments, selections, or refinements on SFRs have been performed according to section C.4 of [CCMB-2012-09-001](#). They are easily identified in the following text as they appear **as indicated here**. Note that in order to improve readability, iterations are sometimes expressed within tables.

138 The selected security functional requirements for the TOE, their respective origin and type are summarized in [Table 7](#).

**Table 7. Summary of functional security requirements for the TOE**

Label	Title	Addressing	Origin	Type
FRU_FLT.2	Limited fault tolerance	Malfunction	<a href="#">BSI-PP-0035</a>	<a href="#">CCMB-2012-09-002</a>
FPT_FLS.1	Failure with preservation of secure state			
FMT_LIM.1 [Test]	Limited capabilities	Abuse of TEST functionality	<a href="#">BSI-PP-0035</a>	Extended
FMT_LIM.2 [Test]	Limited availability			
FMT_LIM.1 [Admin]	Limited capabilities	Abuse of ADMIN functionality	Security Target Operated	
FMT_LIM.2 [Admin]	Limited availability			
FAU_SAS.1	Audit storage	Lack of TOE identification	<a href="#">BSI-PP-0035</a> Operated	

Table 7. Summary of functional security requirements for the TOE (continued)

Label	Title	Addressing	Origin	Type
FPT_PHP.3	Resistance to physical attack	Physical manipulation & probing		CCMB-2012-09-002
FDP_ITT.1	Basic internal transfer protection	Leakage	BSI-PP-0035	
FPT_ITT.1	Basic internal TSF data transfer protection			
FDP_IFC.1	Subset information flow control			
FCS_RNG.1	Random number generation	Weak cryptographic quality of random numbers	BSI-PP-0035 Operated	Extended
FCS_COP.1	Cryptographic operation	Cipher scheme support	AUG #1 Operated	CCMB-2012-09-002
FCS_CKM.1 (if NesLib is embedded only)	Cryptographic key generation		Security Target Operated	
FDP_ACC.2 [Memories]	Complete access control	Memory access violation	Security Target Operated	
FDP_ACF.1 [Memories]	Security attribute based access control		AUG #4 Operated	
FMT_MSA.3 [Memories]	Static attribute initialisation	Correct operation		
FMT_MSA.1 [Memories]	Management of security attribute			
FMT_SMF.1 [Memories]	Specification of management functions			
FDP_ITC.1 [Loader]	Import of user data without security attributes	User data loading access violation	Security Target Operated	
FDP_ACC.1 [Loader]	Subset access control			
FDP_ACF.1 [Loader]	Security attribute based access control			
FMT_MSA.3 [Loader]	Static attribute initialisation	Correct operation		
FMT_MSA.1 [Loader]	Management of security attribute			
FMT_SMF.1 [Loader]	Specification of management functions	Abuse of ADMIN functionality		
FDP_ACC.1 [APPLI_FWL]	Subset access control	Protected Application intrinsic confidentiality and integrity	Security Target Operated	
FDP_ACF.1 [APPLI_FWL]	Security attribute based access control			
FMT_MSA.3 [APPLI_FWL]	Static attribute initialisation			

## 7.1.1 Security Functional Requirements from the Protection Profile

### Limited fault tolerance (FRU\_FLT.2)

- 139 The TSF shall ensure the operation of all the TOE's capabilities when the following failures occur: **exposure to operating conditions which are not detected according to the requirement Failure with preservation of secure state (FPT\_FLS.1).**

### Failure with preservation of secure state (FPT\_FLS.1)

- 140 The TSF shall preserve a secure state when the following types of failures occur: **exposure to operating conditions which may not be tolerated according to the requirement Limited fault tolerance (FRU\_FLT.2) and where therefore a malfunction could occur.**

- 141 Refinement:

The term "failure" above also covers "circumstances". The TOE prevents failures for the "circumstances" defined above.

Regarding application note 15 of [BSI-PP-0035](#), the TOE provides information on the operating conditions monitored during Security IC Embedded Software execution and after a warm reset. No audit requirement is however selected in this Security Target.

### Limited capabilities (FMT\_LIM.1) [Test]

- 142 The TSF shall be designed and implemented in a manner that limits their capabilities so that in conjunction with "Limited availability (FMT\_LIM.2)" the following policy is enforced: Limited capability and availability Policy [Test].

### Limited availability (FMT\_LIM.2) [Test]

- 143 The TSF shall be designed and implemented in a manner that limits their availability so that in conjunction with "Limited capabilities (FMT\_LIM.1)" the following policy is enforced: Limited capability and availability Policy [Test].

- 144 *SFP\_1: Limited capability and availability Policy [Test]*

*Deploying Test Features after TOE Delivery does not allow User Data to be disclosed or manipulated, TSF data to be disclosed or manipulated, software to be reconstructed and no substantial information about construction of TSF to be gathered which may enable other attacks.*

### Audit storage (FAU\_SAS.1)

- 145 The TSF shall provide **the test process before TOE Delivery** with the capability to store the **Initialisation Data and/or Pre-personalisation Data and/or supplements of the Security IC Embedded Software** in the **NVM**.

### Resistance to physical attack (FPT\_PHP.3)

- 146 The TSF shall resist **physical manipulation and physical probing**, to the **TSF** by responding automatically such that the SFRs are always enforced.

- 147 Refinement:

The TSF will implement appropriate mechanisms to continuously counter physical manipulation and physical probing. Due to the nature of these attacks (especially

manipulation) the TSF can by no means detect attacks on all of its elements. Therefore, permanent protection against these attacks is required ensuring that security functional requirements are enforced. Hence, “automatic response” means here (i) assuming that there might be an attack at any time and (ii) countermeasures are provided at any time.

### Basic internal transfer protection (FDP\_ITT.1)

148 The TSF shall enforce the **Data Processing Policy** to prevent the **disclosure** of user data when it is transmitted between physically-separated parts of the TOE.

### Basic internal TSF data transfer protection (FPT\_ITT.1)

149 The TSF shall protect TSF data from **disclosure** when it is transmitted between separate parts of the TOE.

150 Refinement:

The different memories, the CPU and other functional units of the TOE (e.g. a cryptographic co-processor) are seen as separated parts of the TOE.

This requirement is equivalent to FDP\_ITT.1 above but refers to TSF data instead of User Data. Therefore, it should be understood as to refer to the same **Data Processing Policy** defined under FDP\_IFC.1 below.

### Subset information flow control (FDP\_IFC.1)

151 The TSF shall enforce the **Data Processing Policy** on **all confidential data when they are processed or transferred by the TSF or by the Security IC Embedded Software**.

152 *SFP\_2: Data Processing Policy*

*User Data and TSF data shall not be accessible from the TOE except when the Security IC Embedded Software decides to communicate the User Data via an external interface. The protection shall be applied to confidential data only but without the distinction of attributes controlled by the Security IC Embedded Software.*

### Random number generation (FCS\_RNG.1)

153 The TSF shall provide a **physical** random number generator that implements:

- / **A total failure test detects a total failure of entropy source immediately when the RNG has started. When a total failure is detected, no random numbers will be output.**
- / **If a total failure of the entropy source occurs while the RNG is being operated, the RNG prevents the output of any internal random number that depends on some raw random numbers that have been generated after the total failure of the entropy source.**
- / **The online test shall detect non-tolerable statistical defects of the raw random number sequence (i) immediately when the RNG has started, and (ii) while the RNG is being operated. The TSF must not output any random numbers before the power-up online test has finished successfully or when a defect has been detected.**
- / **The online test procedure shall be effective to detect non-tolerable weaknesses of the random numbers soon.**
- / **The online test procedure checks the quality of the raw random number sequence. It is triggered externally. The online test is suitable for detecting non-**

*tolerable statistical defects of the statistical properties of the raw random numbers within an acceptable period of time.*

- 154 The TSF shall provide **octets of bits** that meet
  - / **Test procedure A does not distinguish the internal random numbers from output sequences of an ideal RNG.**
  - / **The average Shannon entropy per internal random bit exceeds 0.997.**

**7.1.2 Additional Security Functional Requirements for the cryptographic services.**

- 155 The following SFRs are extensions to "BSI-PP-0035" Protection Profile (PP), related to the cryptographic services.

**Cryptographic operation (FCS\_COP.1)**

- 156 The TSF shall perform **the operations in Table 8** in accordance with a specified cryptographic algorithm **in Table 8** and cryptographic key sizes **of Table 8** that meet the **standards in Table 8. The list of operations depends on the presence of NesLib or crypto accelerators, as indicated in Table 8 (Restrict).**

**Table 8. FCS\_COP.1 iterations (cryptographic operations)**

Restrict	Iteration label	[assignment: list of cryptographic operations]	[assignment: cryptographic algorithm]	[assignment: cryptographic key sizes]	[assignment: list of standards]
	EDES	* encryption * decryption - in Cipher Block Chaining (CBC) mode - in Electronic Code Book (ECB) mode	Data Encryption Standard (DES)  Triple Data Encryption Standard (3DES)	56 bits  168 bits	<a href="#">NIST SP 800-67</a> <a href="#">NIST SP 800-38A</a>
	AES	* encryption (cipher) * decryption (inverse cipher) * key expansion * randomize * message authentication Code computation (CMAC)	Advanced Encryption Standard	128, 192 and 256 bits	<a href="#">FIPS PUB 197</a>
If NesLib	RSA	* RSA public key operation * RSA private key operation without the Chinese Remainder Theorem * RSA private key operation with the Chinese Remainder Theorem * EMSA PSS and PKCS1 signature scheme coding	Rivest, Shamir & Adleman's	up to 4096 bits	<a href="#">PKCS #1 V2.1</a>

Table 8. FCS\_COP.1 iterations (cryptographic operations) (continued)

Restrict	Iteration label	[assignment: list of cryptographic operations]	[assignment: cryptographic algorithm]	[assignment: cryptographic key sizes]	[assignment: list of standards]
If NesLib	ECC in Weierstrass curves	<ul style="list-style-type: none"> <li>* private scalar multiplication</li> <li>* prepare Jacobian</li> <li>* public scalar multiplication</li> <li>* point validity check</li> <li>* convert Jacobian to affine coordinates</li> <li>* general point addition</li> <li>* point expansion</li> <li>* point compression</li> <li>* Diffie-Hellman (ECDH) key agreement computation</li> <li>* digital signature algorithm (ECDSA) generation and verification</li> </ul>	Elliptic Curves Cryptography on GF(p) on curves in Weierstrass form	up to 640 bits	<p><a href="#">IEEE 1363-2000, chapter 7</a></p> <p><a href="#">IEEE 1363a-2004</a></p> <p><a href="#">NIST SP 800-56A</a></p> <p><a href="#">FIPS 186-4</a></p> <p><a href="#">ANSI X9.62 section 7</a></p>
If NesLib	SHA	<ul style="list-style-type: none"> <li>* SHA-1</li> <li>* SHA-224</li> <li>* SHA-256</li> <li>* SHA-384</li> <li>* SHA-512</li> <li>* Protected SHA-1</li> <li>* Protected SHA-256</li> <li>* HMAC using any of the above functions</li> </ul>	Secure Hash Algorithm (SHA-1 and SHA-2)	<p>assignment pointless because algorithm has no key</p> <p>up to 256 bits</p>	<p><a href="#">FIPS PUB 180-2</a></p> <p><a href="#">FIPS PUB 198-1</a></p>
If NesLib	Keccak and SHA-3	<ul style="list-style-type: none"> <li>* SHAKE128,</li> <li>* SHAKE256,</li> <li>* SHA3-224,</li> <li>* SHA3-256,</li> <li>* SHA3-384,</li> <li>* SHA3-512,</li> <li>* Keccak[r,1600-r],</li> <li>* protected SHAKE128,</li> <li>* protected SHAKE256,</li> <li>* protected SHA3-224,</li> <li>* protected SHA3-256,</li> <li>* protected SHA3-384,</li> <li>* protected SHA3-512,</li> <li>* protected Keccak[r,1600-r]</li> </ul>	Keccak	no key for plain functions, variable key length up to security level for protected functions (security level is last number in function names and 1600-c for Keccak)	<a href="#">FIPS PUB 202</a>

**Table 8. FCS\_COP.1 iterations (cryptographic operations) (continued)**

Restrict	Iteration label	[assignment: list of cryptographic operations]	[assignment: cryptographic algorithm]	[assignment: cryptographic key sizes]	[assignment: list of standards]
If NesLib	Keccak-p	* Keccak-p[1600, n_r=24], * Keccak-p[1600, n_r=12], * protected Keccak-p[1600,n_r=24], * protected Keccak-p[1600, n_r =12]	Keccak-p	no key for plain functions, any key length up to 256 bits for protected functions	<i>FIPS PUB 202</i>
If NesLib	Diffie-Hellman	* Diffie-Hellman	Diffie-Hellman key establishment	up to 4096 bits	<i>ANSI X9.42</i>
If NesLib	DRBG	* SHA-1 * SHA-224 * SHA-256 * SHA-384 * SHA-512	Hash-DRBG	none	<i>NIST SP 800-90</i> <i>FIPS PUB 180-2</i>
		AES	CTR-DRBG	128, 192 and 256 bits	<i>NIST SP 800-90</i> <i>FIPS PUB 197</i>

157 Note that DES and triple DES with two keys are no longer recommended as encryption functions in the context of smart card applications. Hence, Security IC Embedded Software may need to use triple DES with three keys to achieve a suitable strength.

158 Note that SHA-1 is no longer recommended as a cryptographic function. Hence, Security IC Embedded Software may need to use another SHA to achieve a suitable strength.

**Cryptographic key generation (FCS\_CKM.1)**

159 *If NesLib is embedded only*, the TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm, *in Table 9*, and specified cryptographic key sizes *of Table 9* that meet the following *standards in Table 9*.

**Table 9. FCS\_CKM.1 iterations (cryptographic key generation)**

Iteration label	[assignment: cryptographic key generation algorithm]	[assignment: cryptographic key sizes]	[assignment: list of standards]
Prime generation	prime generation and RSA prime generation algorithm, optionally protected against side channel attacks, and/or optionally with conditions	up to 2048 bits	<i>FIPS PUB 140-2</i> <i>FIPS 186-4</i>
RSA key generation	RSA key pair generation algorithms, optionally protected against side channel attacks, and/or optionally with conditions	up to 4096 bits	<i>FIPS PUB 140-2</i> <i>ISO/IEC 9796-2</i> <i>PKCS #1 V2.1</i>



### 7.1.3 Additional Security Functional Requirements for the memories protection.

160 The following SFRs are extensions to "BSI-PP-0035" Protection Profile (PP), related to the memories protection.

#### Static attribute initialisation (FMT\_MSA.3) [Memories]

161 The TSF shall enforce the **Dynamic Memory Access Control Policy** to provide **minimally protective**<sup>(a)</sup> default values for security attributes that are used to enforce the SFP.

162 The TSF shall allow **none** to specify alternative initial values to override the default values when an object or information is created.

Application note:

The security attributes are the set of access rights currently defined. They are dynamically attached to the subjects and objects locations, i.e. each logical address.

#### Management of security attributes (FMT\_MSA.1) [Memories]

163 The TSF shall enforce the **Dynamic Memory Access Control Policy** to restrict the ability to **modify** the security attributes **current set of access rights** to **software running in privileged mode**.

#### Complete access control (FDP\_ACC.2) [Memories]

164 The TSF shall enforce the **Dynamic Memory Access Control Policy** on **all subjects (software), all objects (data including code stored in memories)** and all operations among subjects and objects covered by the SFP.

165 The TSF shall ensure that all operations between any subject controlled by the TSF and any object controlled by the TSF are covered by an access control SFP.

#### Security attribute based access control (FDP\_ACF.1) [Memories]

166 The TSF shall enforce the **Dynamic Memory Access Control Policy** to objects based on the following: **software mode, the object location, the operation to be performed, and the current set of access rights**.

167 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: **the operation is allowed if and only if the software mode, the object location and the operation matches an entry in the current set of access rights**.

168 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: **none**.

169 The TSF shall explicitly deny access of subjects to objects based on the following additional rules: **in Admin or User configuration, any access (read, write, execute) to the OST ROM is denied, and in User configuration, any write access to the ST NVM is denied**.

Note: *It should be noted that this level of policy detail is not needed at the application level. The composite Security Target writer should describe the ES access control and information flow control policies instead. Within the ES High Level Design description, the chosen setting of*

---

a. See the Datasheet referenced in [Section 9](#) for actual values.

*IC security attributes would be shown to implement the described policies relying on the IC SFP presented here.*

170 The following SFP **Dynamic Memory Access Control Policy** is defined for the requirement "Security attribute based access control (FDP\_ACF.1)":

171 *SFP\_3: Dynamic Memory Access Control Policy*

172 *The TSF must control read, write, execute accesses of software to data, based on the software mode and on the current set of access rights.*

### Specification of management functions (FMT\_SMF.1) [Memories]

173 The TSF will be able to perform the following management functions: **modification of the current set of access rights security attributes by software running in privileged mode, supporting the Dynamic Memory Access Control Policy.**

#### 7.1.4 Additional Security Functional Requirements related to the Admin configuration

174 The following SFRs are extensions to "BSI-PP-0035" Protection Profile (PP), related to the possible availability of final test and loading capabilities in phases 4 to 6 of the TOE life-cycle.

#### Limited capabilities (FMT\_LIM.1) [Admin]

175 The TSF shall be designed and implemented in a manner that limits their capabilities so that in conjunction with "Limited availability (FMT\_LIM.2)" the following policy is enforced: **Limited capability and availability Policy [Admin].**

#### Limited availability (FMT\_LIM.2) [Admin]

176 The TSF shall be designed and implemented in a manner that limits their availability so that in conjunction with "Limited capabilities (FMT\_LIM.1)" the following policy is enforced: **Limited capability and availability Policy [Admin].**

177 *SFP\_4: Limited capability and availability Policy [Admin]*

178 *Deploying Loading or Final Test Artifacts after TOE Delivery to final user (phase 7 / USER configuration) does not allow User Data to be disclosed or manipulated, TSF data to be disclosed or manipulated, stored software to be reconstructed or altered, and no substantial information about construction of TSF to be gathered which may enable other attacks.*

#### Import of user data without security attributes (FDP\_ITC.1) [Loader]

179 The TSF shall enforce the **Loading Access Control Policy** when importing user data, controlled under the SFP, from outside of the TOE.

180 The TSF shall ignore any security attributes associated with the User data when imported from outside of the TOE.

- 181 The TSF shall enforce the following rules when importing user data controlled under the SFP from outside of the TOE:
- / ***the integrity of the loaded user data is checked at the end of each loading session,***
  - / ***the loaded user data is received encrypted, internally decrypted, then stored into the NVM.***

### Static attribute initialisation (FMT\_MSA.3) [Loader]

- 182 The TSF shall enforce the ***Loading Access Control Policy*** to provide ***restrictive*** default values for security attributes that are used to enforce the SFP.
- 183 The TSF shall allow ***none*** to specify alternative initial values to override the default values when an object or information is created.

### Management of security attributes (FMT\_MSA.1) [Loader]

- 184 The TSF shall enforce the ***Loading Access Control Policy*** to restrict the ability to ***modify*** the security attributes ***password*** to ***the Standard Loader***.

### Subset access control (FDP\_ACC.1) [Loader]

- 185 The TSF shall enforce the ***Loading Access Control Policy*** on ***the execution of the Standard Loader instructions and/or the Advanced Loader instructions***.

### Security attribute based access control (FDP\_ACF.1) [Loader]

- 186 The TSF shall enforce the ***Loading Access Control Policy*** to objects based on the following: ***an external process may execute the Standard Loader instructions and/or the Advanced Loader instructions, depending on the presentation of valid passwords***.
- 187 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: ***the Standard Loader instructions and/or Advanced Loader instructions can be executed only if valid passwords have been presented***.
- 188 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: ***none***.
- 189 The TSF shall explicitly deny access of subjects to objects based on the following additional rules: ***none***.
- 190 The following SFP ***Loading Access Control Policy*** is defined for the requirement "Security attribute based access control (FDP\_ACF.1)":
- 191 ***SFP\_5: Loading Access Control Policy***
- 192 ***According to a password control, the TSF grants execution of the instructions of the Standard Loader, Advanced Loader or none***.

### Specification of management functions (FMT\_SMF.1) [Loader]

- 193 The TSF will be able to perform the following management functions: ***modification of the Standard Loader behaviour, by the Advanced Loader, under the Loading Access Control Policy***.

### 7.1.5 Additional Security Functional Requirements related to the Application Firewall

194 The following SFRs are extensions to "BSI-PP-0035" Protection Profile (PP), related to the protections by the Application Firewall.

#### Subset access control (FDP\_ACC.1) [APPLI\_FWL]

195 The TSF shall enforce the *Protected Application Firewall Access Control Policy* on the *Protected Application code and data*.

#### Security attribute based access control (FDP\_ACF.1) [APPLI\_FWL]

196 The TSF shall enforce the *Protected Application Firewall Access Control Policy* to objects based on the following: *Protected Application code and data*.

197 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: *Another application cannot read, write, compare any piece of data or code belonging to the Protected Application*.

198 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: *None*.

199 The TSF shall explicitly deny access of subjects to objects based on the following additional rules:

- 1 *Another application cannot read, write, compare any piece of data or code belonging to the Protected Application*.

200 The following SFP *Protected Application Firewall Access Control Policy* is defined for the requirement "Security attribute based access control (FDP\_ACF.1) [APPLI\_FWL]":

201 *SFP\_6: Protected Application Firewall Access Control Policy*

202 *Another application cannot read, write, compare any piece of data or code belonging to the Protected Application*.

#### Static attribute initialisation (FMT\_MSA.3) [APPLI\_FWL]

203 The TSF shall enforce the *Protected Application Firewall Access Control Policy* to provide *restrictive* default values for security attributes that are used to enforce the SFP.

204 The TSF shall allow *no subject* to specify alternative initial values to override the default values when an object or information is created.

## 7.2 TOE security assurance requirements

205 Security Assurance Requirements for the TOE for the evaluation of the TOE are those taken from the Evaluation Assurance Level 5 (EAL5) and augmented by taking the following components:

- 1 ALC\_DVS.2 and AVA\_VAN.5.

206 Regarding application note 21 of BSI-PP-0035, the continuously increasing maturity level of evaluations of Security ICs justifies the selection of a higher-level assurance package.

207 The set of security assurance requirements (SARs) is presented in Table 10, indicating the origin of the requirement.

**Table 10. TOE security assurance requirements**

Label	Title	Origin
ADV_ARC.1	Security architecture description	EAL5/ <a href="#">BSI-PP-0035</a>
ADV_FSP.5	Complete semi-formal functional specification with additional error information	EAL5
ADV_IMP.1	Implementation representation of the TSF	EAL5/ <a href="#">BSI-PP-0035</a>
ADV_INT.2	Well-structured internals	EAL5
ADV_TDS.4	Semiformal modular design	EAL5
AGD_OPE.1	Operational user guidance	EAL5/ <a href="#">BSI-PP-0035</a>
AGD_PRE.1	Preparative procedures	EAL5/ <a href="#">BSI-PP-0035</a>
ALC_CMC.4	Production support, acceptance procedures and automation	EAL5/ <a href="#">BSI-PP-0035</a>
ALC_CMS.5	Development tools CM coverage	EAL5
ALC_DEL.1	Delivery procedures	EAL5/ <a href="#">BSI-PP-0035</a>
ALC_DVS.2	Sufficiency of security measures	<a href="#">BSI-PP-0035</a>
ALC_LCD.1	Developer defined life-cycle model	EAL5/ <a href="#">BSI-PP-0035</a>
ALC_TAT.2	Compliance with implementation standards	EAL5
ASE_CCL.1	Conformance claims	EAL5/ <a href="#">BSI-PP-0035</a>
ASE_ECD.1	Extended components definition	EAL5/ <a href="#">BSI-PP-0035</a>
ASE_INT.1	ST introduction	EAL5/ <a href="#">BSI-PP-0035</a>
ASE_OBJ.2	Security objectives	EAL5/ <a href="#">BSI-PP-0035</a>
ASE_REQ.2	Derived security requirements	EAL5/ <a href="#">BSI-PP-0035</a>
ASE_SPD.1	Security problem definition	EAL5/ <a href="#">BSI-PP-0035</a>
ASE_TSS.1	TOE summary specification	EAL5/ <a href="#">BSI-PP-0035</a>
ATE_COV.2	Analysis of coverage	EAL5/ <a href="#">BSI-PP-0035</a>
ATE_DPT.3	Testing: modular design	EAL5
ATE_FUN.1	Functional testing	EAL5/ <a href="#">BSI-PP-0035</a>
ATE_IND.2	Independent testing - sample	EAL5/ <a href="#">BSI-PP-0035</a>
AVA_VAN.5	Advanced methodical vulnerability analysis	<a href="#">BSI-PP-0035</a>

### 7.3 Refinement of the security assurance requirements

- 208 As [BSI-PP-0035](#) defines refinements for selected SARs, these refinements are also claimed in this Security Target.
- 209 The main customizing is that the IC Dedicated Software is an operational part of the TOE after delivery, although it is not available to the user.
- 210 Regarding application note 22 of [BSI-PP-0035](#), the refinements for all the assurance families have been reviewed for the hierarchically higher-level assurance components selected in this Security Target.

- 211 The text of the impacted refinements of *BSI-PP-0035* is reproduced in the next sections.
- 212 For reader's ease, an impact summary is provided in *Table 11*.

**Table 11. Impact of EAL5 selection on *BSI-PP-0035* refinements**

Assurance Family	<i>BSI-PP-0035</i> Level	ST Level	Impact on refinement
ADO_DEL	1	1	None
ALC_DVS	2	2	None
ALC_CMS	4	5	None, refinement is still valid
ALC_CMC	4	4	None
ADV_ARC	1	1	None
ADV_FSP	4	5	Presentation style changes, IC Dedicated Software is included
ADV_IMP	1	1	None
ATE_COV	2	2	IC Dedicated Software is included
AGD_OPE	1	1	None
AGD_PRE	1	1	None
AVA_VAN	5	5	None

**7.3.1 Refinement regarding functional specification (ADV\_FSP)**

- 213 ~~Although the IC Dedicated Test Software is a part of the TOE, the test functions of the IC Dedicated Test Software are not described in the Functional Specification because the IC Dedicated Test Software is considered as a test tool delivered with the TOE but not providing security functions for the operational phase of the TOE. **The IC Dedicated Software provides security functionalities as soon as the TOE becomes operational (boot software). These are properly identified in the delivered documentation.**~~
- 214 ~~The Functional Specification **refers to datasheet to** trace security features that do not provide any external interface but that contribute to fulfil the SFRs e.g. like physical protection. Thereby they are part of the complete instantiation of the SFRs.~~
- 215 ~~The Functional Specification **refers to design specifications to detail the** mechanisms against physical attacks **described** in a more general way only, but detailed enough to be able to support Test Coverage Analysis also for those mechanisms where inspection of the layout is of relevance or tests beside the TSFI may be needed.~~
- 216 ~~The Functional Specification **refers to data sheet to** specify operating conditions of the TOE. These conditions include but are not limited to the frequency of the clock, the power supply, and the temperature.~~
- 217 ~~All functions and mechanisms which control access to the functions provided by the IC Dedicated Test Software (refer to the security functional requirement (FMT\_LIM.2)) **are part of the** Functional Specification. Details will be given in the document for ADV\_ARC, ~~refer to Section 6.2.1.5.~~ In addition, all these functions and mechanisms **are** subsequently ~~be~~ refined according to all relevant requirements of the Common Criteria assurance class ADV because these functions and mechanisms are active after TOE Delivery and need to be part of the assurance aspects Tests (class ATE) and Vulnerability Assessment (class AVA). Therefore, all necessary information **is** provided to allow tests and vulnerability assessment.~~

218 Since the selected higher-level assurance component requires a security functional specification presented in a “semi-formal style” (ADV\_FSP.5.2C) the changes affect the style of description, the *BSI-PP-0035* refinements can be applied with changes covering the IC Dedicated Test Software and are valid for ADV\_FSP.5.

### 7.3.2 Refinement regarding test coverage (ATE\_COV)

219 The TOE *is* tested under different operating conditions within the specified ranges. These conditions include but are not limited to the frequency of the clock, the power supply, and the temperature. This means that “Fault tolerance (FRU\_FLT.2)” *is* proven for the complete TSF. The tests ~~must~~ also cover functions which may be affected by “ageing” (such as EEPROM writing).

220 The existence and effectiveness of measures against physical attacks (as specified by the functional requirement FPT\_PHP.3) cannot be tested in a straightforward way. Instead **STMicroelectronics provides** evidence that the TOE actually has the particular physical characteristics (especially layout design principles). This *is* done by checking the layout (implementation or actual) in an appropriate way. The required evidence pertains to the existence of mechanisms against physical attacks (unless being obvious).

221 ~~The IC-Dedicated Test Software is seen as a “test tool” being delivered as part of the TOE. However, the Test Features do not provide security functionality. Therefore, Test Features need not to be covered by the Test Coverage Analysis but all functions and mechanisms which limit the capability of the functions (cf. FMT\_LIM.1) and control access to the functions (cf. FMT\_LIM.2) provided by the IC-Dedicated Test Software must be part of the Test Coverage Analysis. The IC Dedicated Software provides security functionalities as soon as the TOE becomes operational (boot software). These are part of the Test Coverage Analysis.~~

## 7.4 Security Requirements rationale

### 7.4.1 Rationale for the Security Functional Requirements

222 Just as for the security objectives rationale of *Section 6.3*, the main line of this rationale is that the inclusion of all the security requirements of the *BSI-PP-0035* protection profile, together with those in *AUG*, and with those introduced in this Security Target, guarantees that all the security objectives identified in *Section 6* are suitably addressed by the security requirements stated in this chapter, and that the latter together form an internally consistent whole.

Table 12. Security Requirements versus Security Objectives

Security Objective	TOE Security Functional and Assurance Requirements
BSI.O.Leak-Inherent	FDP_ITT.1 Basic internal transfer protection FPT_ITT.1 Basic internal TSF data transfer protection FDP_IFC.1 Subset information flow control
BSI.O.Phys-Probing	FPT_PHP.3 Resistance to physical attack
BSI.O.Malfunction	FRU_FLT.2 Limited fault tolerance FPT_FLS.1 Failure with preservation of secure state
BSI.O.Phys-Manipulation	FPT_PHP.3 Resistance to physical attack

**Table 12. Security Requirements versus Security Objectives (continued)**

Security Objective	TOE Security Functional and Assurance Requirements
BSI.O.Leak-Forced	All requirements listed for BSI.O.Leak-Inherent FDP_ITT.1, FPT_ITT.1, FDP_IFC.1 plus those listed for BSI.O.Malfunction and BSI.O.Phys-Manipulation FRU_FLT.2, FPT_FLS.1, FPT_PHP.3
BSI.O.Abuse-Func	FMT_LIM.1 [Test] Limited capabilities FMT_LIM.2 [Test] Limited availability FMT_LIM.1 [Admin] Limited capabilities FMT_LIM.2 [Admin] Limited availability plus those for BSI.O.Leak-Inherent, BSI.O.Phys-Probing, BSI.O.Malfunction, BSI.O.Phys-Manipulation, BSI.O.Leak-Forced FDP_ITT.1, FPT_ITT.1, FDP_IFC.1, FPT_PHP.3, FRU_FLT.2, FPT_FLS.1
BSI.O.Identification	FAU_SAS.1 Audit storage
BSI.O.RND	FCS_RNG.1 Random number generation plus those for BSI.O.Leak-Inherent, BSI.O.Phys-Probing, BSI.O.Malfunction, BSI.O.Phys-Manipulation, BSI.O.Leak-Forced FDP_ITT.1, FPT_ITT.1, FDP_IFC.1, FPT_PHP.3, FRU_FLT.2, FPT_FLS.1
BSI.OE.Plat-Appl	Not applicable
BSI.OE.Resp-Appl	Not applicable
BSI.OE.Process-Sec-IC	Not applicable
AUG1.O.Add-Functions	FCS_COP.1 Cryptographic operation FCS_CKM.1 Cryptographic key generation
AUG4.O.Mem-Access	FDP_ACC.2 [Memories] Complete access control FDP_ACF.1 [Memories] Security attribute based access control FMT_MSA.3 [Memories] Static attribute initialisation FMT_MSA.1 [Memories] Management of security attribute FMT_SMF.1 [Memories] Specification of management functions
O.Controlled-ES-Loading	FDP_ITC.1 [Loader] Import of user data without security attributes FDP_ACC.1 [Loader] Subset access control FDP_ACF.1 [Loader] Security attribute based access control FMT_MSA.3 [Loader] Static attribute initialisation FMT_MSA.1 [Loader] Management of security attribute FMT_SMF.1 [Loader] Specification of management functions
O.Plat-Appl	All SFRs from the PP



**Table 12. Security Requirements versus Security Objectives (continued)**

Security Objective	TOE Security Functional and Assurance Requirements
O.Resp-Appl	All SFRs defined additionally in the ST
O.Firewall	FDP_ACC.1 [APPLI_FWL] Subset access control FDP_ACF.1 [APPLI_FWL] Security attribute based access control FMT_MSA.3 [APPLI_FWL] Static attribute initialisation

- 223 As origins of security objectives have been carefully kept in their labelling, and origins of security requirements have been carefully identified in [Table 7](#) and [Table 10](#), it can be verified that the justifications provided by the [BSI-PP-0035](#) protection profile and [AUG](#) can just be carried forward to their union.
- 224 From [Table 5](#), it is straightforward to identify two additional security objectives for the TOE ([AUG1.O.Add-Functions](#) and [AUG4.O.Mem-Access](#)) tracing back to [AUG](#), and four additional objectives ([O.Controlled-ES-Loading](#), [O.Plat-Appl](#), [O.Resp-Appl](#), and [O.Firewall](#)) introduced in this Security Target. This rationale must show that security requirements suitably address them.
- 225 Furthermore, a more careful observation of the requirements listed in [Table 7](#) and [Table 10](#) shows that:
- 1 there are security requirements introduced from [AUG](#) ([FCS\\_COP.1](#), [FDP\\_ACC.2 \[Memories\]](#), [FDP\\_ACF.1 \[Memories\]](#), [FMT\\_MSA.3 \[Memories\]](#) and [FMT\\_MSA.1 \[Memories\]](#)),
  - 1 there are additional security requirements introduced by this Security Target ([FCS\\_CKM.1](#), [FMT\\_LIM.1 \[Admin\]](#), [FMT\\_LIM.2 \[Admin\]](#), [FDP\\_ITC.1 \[Loader\]](#), [FDP\\_ACC.1 \[Loader\]](#), [FDP\\_ACF.1 \[Loader\]](#), [FMT\\_MSA.3 \[Loader\]](#), [FMT\\_MSA.1 \[Loader\]](#), [FMT\\_SMF.1 \[Loader\]](#), [FMT\\_SMF.1 \[Memories\]](#), [FDP\\_ACC.1 \[APPLI\\_FWL\]](#), [FDP\\_ACF.1 \[APPLI\\_FWL\]](#) and [FMT\\_MSA.3 \[APPLI\\_FWL\]](#), and various assurance requirements of EAL5).
- 226 Though it remains to show that:
- 1 security objectives from this Security Target and from [AUG](#) are addressed by security requirements stated in this chapter,
  - 1 additional security requirements from this Security Target and from [AUG](#) are mutually supportive with the security requirements from the [BSI-PP-0035](#) protection profile, and they do not introduce internal contradictions,
  - 1 all dependencies are still satisfied.
- 227 The justification that the additional security objectives are suitably addressed, that the additional security requirements are mutually supportive and that, together with those already in [BSI-PP-0035](#), they form an internally consistent whole, is provided in the next subsections.

## 7.4.2 Additional security objectives are suitably addressed

### Security objective “Dynamic Area based Memory Access Control ([AUG4.O.Mem-Access](#))”

- 228 The justification related to the security objective “*Dynamic* Area based Memory Access Control ([AUG4.O.Mem-Access](#))” is as follows:

229 The security functional requirements "*Complete access control (FDP\_ACC.2) [Memories]*" and "*Security attribute based access control (FDP\_ACF.1) [Memories]*", with the related Security Function Policy (SFP) "**Dynamic Memory Access Control Policy**" exactly require to implement a **Dynamic** area based memory access control as demanded by *AUG4.O.Mem-Access*. Therefore, *FDP\_ACC.2 [Memories]* and *FDP\_ACF.1 [Memories]* with **their** SFP **are** suitable to meet the security objective.

230 The security functional requirement "*Static attribute initialisation (FMT\_MSA.3) [Memories]*" requires that the TOE provides default values for security attributes. The ability to update the security attributes is restricted to privileged subject(s) **as further detailed in the security functional requirement "Management of security attributes (FMT\_MSA.1) [Memories]"**. These management functions ensure that the required access control can be realised using the functions provided by the TOE.

#### **Security objective "Additional Specific Security Functionality (*AUG1.O.Add-Functions*)"**

231 The justification related to the security objective "Additional Specific Security Functionality (*AUG1.O.Add-Functions*)" is as follows:

232 The security functional requirements "*Cryptographic operation (FCS\_COP.1)*" and "*Cryptographic key generation (FCS\_CKM.1)*" exactly require those functions to be implemented that are demanded by *AUG1.O.Add-Functions*. Therefore, *FCS\_COP.1* is suitable to meet the security objective, **together with** *FCS\_CKM.1*.

#### **Security objective "Controlled loading of the Security IC Embedded Software (*O.Controlled-ES-Loading*)"**

233 The justification related to the security objective "Controlled loading of the Security IC Embedded Software (*O.Controlled-ES-Loading*)" is as follows:

234 The security functional requirements "*Import of user data without security attributes (FDP\_ITC.1) [Loader]*", "*Subset access control (FDP\_ACC.1) [Loader]*" and "*Security attribute based access control (FDP\_ACF.1) [Loader]*", with the related Security Function Policy (SFP) "Loading Access Control Policy" exactly require to implement a controlled loading of the Security IC Embedded Software as demanded by *O.Controlled-ES-Loading*. Therefore, *FDP\_ITC.1 [Loader]*, *FDP\_ACC.1 [Loader]* and *FDP\_ACF.1 [Loader]* with their SFP are suitable to meet the security objective.

235 The security functional requirement "*Static attribute initialisation (FMT\_MSA.3) [Loader]*" requires that the TOE provides default values for security attributes. The ability to update the security attributes is restricted to privileged subject(s) as further detailed in the security functional requirement "*Management of security attributes (FMT\_MSA.1) [Loader]*". The security functional requirement "*Specification of management functions (FMT\_SMF.1) [Loader]*" provides additional controlled facility for adapting the loader behaviour to the user's needs. These management functions ensure that the required access control, associated to the loading feature, can be realised using the functions provided by the TOE.

#### **Security objective "Usage of hardware platform (*O.Plat-App*)"**

236 The justification related to the security objective "Usage of hardware platform (*O.Plat-App*)" is as follows:

237 The objective was translated from an environment objective in the PP into a TOE objective in this ST. Its goal is to ensure that the hardware platform is used in a secure manner, which is based on the insight that hardware and software have to supplement each other in order

to build a secure whole. The ST claims conformance to the PP and the PP SFRs do cover the PP TOE objectives. The PP uses the environment objective OE.Plat-Appl to ensure appropriate software support for its SFRs, but since the TOE does now consist of hardware and software, the PP SFRs do also apply to the Security IC Embedded Software included in the TOE, and thereby all PP SFRs fulfil the objective O.Plat-Appl. In other words: the software support required by the hardware-focused PP is now included in this combined hardware-software TOE and both hardware and software fulfil the PP SFRs.

#### **Security objective “Treatment of user data (O.Resp-Appl)”**

238 The justification related to the security objective “Treatment of user data (O.Resp-Appl)” is as follows:

239 The objective was translated from an environment objective in the PP into a TOE objective in this ST. The objective is that “Security relevant User Data (especially cryptographic keys) are treated by the Security IC Embedded Software as required by the security needs of the specific application context.” The application context is defined by the security environment described in this ST. The additional SFRs defined in this ST do address the additional TOE objectives of the ST based on the ST security environment, therefore O.Resp-Appl is fulfilled by the additional ST SFRs.

#### **Security objective “Application firewall (O.Firewall)”**

240 The justification related to the security objective “Application firewall (O.Firewall)” is as follows:

241 The security functional requirements "Subset access control (FDP\_ACC.1) [APPLI\_FWL]" and "Security attribute based access control (FDP\_ACF.1) [APPLI\_FWL]", supported by "Static attribute initialisation (FMT\_MSA.3) [APPLI\_FWL]", require that no application can read, write, compare any piece of data or code belonging to a Protected Application. This meets the objective O.Firewall.

### **7.4.3 Additional security requirements are consistent**

#### **"Cryptographic operation (FCS\_COP.1) & key generation (FCS\_CKM.1)"**

242 These security requirements have already been argued in *Section : Security objective “Additional Specific Security Functionality (AUG1.O.Add-Functions)”* above.

#### **"Static attribute initialisation (FMT\_MSA.3 [Memories]), Management of security attributes (FMT\_MSA.1 [Memories]), Complete access control (FDP\_ACC.2 [Memories]), Security attribute based access control (FDP\_ACF.1 [Memories])"**

243 These security requirements have already been argued in *Section : Security objective “Dynamic Area based Memory Access Control (AUG4.O.Mem-Access)”* above.

**"Import of user data without security attribute ([FDP\\_ITC.1 \[Loader\]](#)),  
 Static attribute initialisation ([FMT\\_MSA.3 \[Loader\]](#)),  
 Management of security attributes ([FMT\\_MSA.1 \[Loader\]](#)),  
 Subset access control ([FDP\\_ACC.1 \[Loader\]](#)),  
 Security attribute based access control ([FDP\\_ACF.1 \[Loader\]](#)),  
 Specification of management function ([FMT\\_SMF.1 \[Loader\]](#))"**

244 These security requirements have already been argued in [Section : Security objective "Controlled loading of the Security IC Embedded Software \(O.Controlled-ES-Loading\)"](#) above.

**"Subset access control ([FDP\\_ACC.1 \[APPLI\\_FWL\]](#)),  
 Security attribute based access control ([FDP\\_ACF.1 \[APPLI\\_FWL\]](#)),  
 Static attribute initialisation ([FMT\\_MSA.3 \[APPLI\\_FWL\]](#)),**

245 These security requirements have already been argued in [Section : Security objective "Application firewall \(O.Firewall\)"](#) above.

#### 7.4.4 Dependencies of Security Functional Requirements

246 All dependencies of Security Functional Requirements have been fulfilled in this Security Target except :

- 1 those justified in the [BSI-PP-0035](#) protection profile security requirements rationale,
- 1 those justified in [AUG](#) security requirements rationale (except on [FMT\\_MSA.2](#), see discussion below),
- 1 the dependency of [FCS\\_COP.1](#) and [FCS\\_CKM.1](#) on [FCS\\_CKM.4](#) (see discussion below),
- 1 the dependency of [FMT\\_MSA.1 \[Loader\]](#) and [FMT\\_MSA.3 \[Loader\]](#) on [FMT\\_SMR.1](#) (see discussion below),
- 1 the dependency of [FMT\\_MSA.3 \[APPLI\\_FWL\]](#) on [FMT\\_MSA.1](#) and [FMT\\_SMR.1](#) (see discussion below).

247 Details are provided in [Table 13](#) below.

**Table 13. Dependencies of security functional requirements**

Label	Dependencies	Fulfilled by security requirements in this Security Target	Dependency already in <a href="#">BSI-PP-0035</a> or in <a href="#">AUG</a>
FRU_FLT.2	FPT_FLS.1	Yes	Yes, <a href="#">BSI-PP-0035</a>
FPT_FLS.1	None	No dependency	Yes, <a href="#">BSI-PP-0035</a>
FMT_LIM.1 [Test]	FMT_LIM.2 [Test]	Yes	Yes, <a href="#">BSI-PP-0035</a>
FMT_LIM.2 [Test]	FMT_LIM.1 [Test]	Yes	Yes, <a href="#">BSI-PP-0035</a>
FMT_LIM.1 [Admin]	FMT_LIM.2 [Admin]	Yes	Yes, <a href="#">BSI-PP-0035</a>
FMT_LIM.2 [Admin]	FMT_LIM.1 [Admin]	Yes	Yes, <a href="#">BSI-PP-0035</a>
FAU_SAS.1	None	No dependency	Yes, <a href="#">BSI-PP-0035</a>
FPT_PHP.3	None	No dependency	Yes, <a href="#">BSI-PP-0035</a>

**Table 13. Dependencies of security functional requirements (continued)**

Label	Dependencies	Fulfilled by security requirements in this Security Target	Dependency already in <i>BSI-PP-0035</i> or in <i>AUG</i>
FDP_ITT.1	FDP_ACC.1 or FDP_IFC.1	Yes	Yes, <i>BSI-PP-0035</i>
FPT_ITT.1	None	No dependency	Yes, <i>BSI-PP-0035</i>
FDP_IFC.1	FDP_IFF.1	No, see <i>BSI-PP-0035</i>	Yes, <i>BSI-PP-0035</i>
FCS_RNG.1	None	No dependency	Yes, <i>BSI-PP-0035</i>
FCS_COP.1	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	Yes, by FDP_ITC.1 and FCS_CKM.1, see discussion below	Yes, <i>AUG #1</i>
	FCS_CKM.4	No, see discussion below	
FCS_CKM.1	[FDP_CKM.2 or FCS_COP.1]	Yes, by FCS_COP.1	
	FCS_CKM.4	No, see discussion below	
FDP_ACC.2 [Memories]	FDP_ACF.1 [Memories]	Yes	No, <i>CCMB-2012-09-002</i>
FDP_ACF.1 [Memories]	FDP_ACC.1 [Memories]	Yes, by FDP_ACC.2 [Memories]	Yes, <i>AUG #4</i>
	FMT_MSA.3 [Memories]	Yes	
FMT_MSA.3 [Memories]	FMT_MSA.1 [Memories]	Yes	Yes, <i>AUG #4</i>
	FMT_SMR.1 [Memories]	No, see <i>AUG #4</i>	
FMT_MSA.1 [Memories]	[FDP_ACC.1 [Memories] or FDP_IFC.1]	Yes, by FDP_ACC.2 [Memories] and FDP_IFC.1	Yes, <i>AUG #4</i>
	FMT_SMF.1 [Memories]	Yes	No, <i>CCMB-2012-09-002</i>
	FMT_SMR.1 [Memories]	No, see <i>AUG #4</i>	Yes, <i>AUG #4</i>
FMT_SMF.1 [Memories]	None	No dependency	No, <i>CCMB-2012-09-002</i>
FMT_ITC.1 [Loader]	[FDP_ACC.1 [Loader] or FDP_IFC.1]	Yes	No, <i>CCMB-2012-09-002</i>
	FMT_MSA.3 [Loader]	Yes	
FDP_ACC.1 [Loader]	FDP_ACF.1 [Loader]	Yes	No, <i>CCMB-2012-09-002</i>
FDP_ACF.1 [Loader]	FDP_ACC.1 [Loader]	Yes	No, <i>CCMB-2012-09-002</i>
	FMT_MSA.3 [Loader]	Yes	

Table 13. Dependencies of security functional requirements (continued)

Label	Dependencies	Fulfilled by security requirements in this Security Target	Dependency already in <i>BSI-PP-0035</i> or in <i>AUG</i>
FMT_MSA.3 [Loader]	FMT_MSA.1 [Loader]	Yes	<i>No, CCMB-2012-09-002</i>
	FMT_SMR.1 [Loader]	No, see discussion below	
FMT_MSA.1 [Loader]	[FDP_ACC.1 [Loader] or FDP_IFC.1]	Yes	<i>No, CCMB-2012-09-002</i>
	FDP_SMF.1 [Loader]	Yes	
	FDP_SMR.1 [Loader]	No, see discussion below	
FDP_SMF.1 [Loader]	None	No dependency	<i>No, CCMB-2012-09-002</i>
FDP_ACC.1 [APPLI_FWL]	FDP_ACF.1 [APPLI_FWL]	Yes	<i>No, CCMB-2012-09-002</i>
FDP_ACF.1 [APPLI_FWL]	FDP_ACC.1 [APPLI_FWL]	Yes	<i>No, CCMB-2012-09-002</i>
	FMT_MSA.3 [APPLI_FWL]	Yes	
FMT_MSA.3 [APPLI_FWL]	FMT_MSA.1	No, see discussion below	<i>No, CCMB-2012-09-002</i>
	FMT_SMR.1	No, see discussion below	

- 248 Part 2 of the Common Criteria defines the dependency of "[Cryptographic operation \(FCS\\_COP.1\)](#)" on "Import of user data without security attributes (FDP\_ITC.1)" or "Import of user data with security attributes (FDP\_ITC.2)" or "Cryptographic key generation (FCS\_CKM.1)". In this particular TOE, both "[Cryptographic key generation \(FCS\\_CKM.1\)](#)" and "[Import of user data without security attributes \(FDP\\_ITC.1\) \[Loader\]](#)" may be used for the purpose of creating cryptographic keys, but also, the ES has all possibilities to implement its own creation function, in conformance with its security policy.
- 249 Part 2 of the Common Criteria defines the dependency of "[Cryptographic operation \(FCS\\_COP.1\)](#)" and "[Cryptographic key generation \(FCS\\_CKM.1\)](#)" on "Cryptographic key destruction (FCS\_CKM.4)". In this particular TOE, there is no specific function for the destruction of the keys. The ES has all possibilities to implement its own destruction function, in conformance with its security policy. Therefore, FCS\_CKM.4 is not defined in this ST.
- 250 Part 2 of the Common Criteria defines the dependency of "[Management of security attributes \(FMT\\_MSA.1\) \[Loader\]](#)" and "[Static attribute initialisation \(FMT\\_MSA.3\) \[Loader\]](#)" on "Security roles (FMT\_SMR.1) [Loader]". This dependency is considered to be satisfied, because the access control defined for the loader is not role-based but enforced for each subject. Therefore, there is no need to identify roles in form of a Security Functional Requirement "FMT\_SMR.1".
- 251 Part 2 of the Common Criteria defines the dependency of "[Static attribute initialisation \(FMT\\_MSA.3\) \[APPLI\\_FWL\]](#)" on "Management of security attributes (FMT\_MSA.1)" and "Security roles (FMT\_SMR.1)". For this particular instantiation of the access control attributes aimed at protecting a Protected Application code and data from unauthorised accesses, the security attributes are only static, initialized at product start. Therefore, there

is no need to identify management capabilities and associated roles in form of Security Functional Requirements "FMT\_MSA.1" and "FMT\_SMR.1".

#### 7.4.5 Rationale for the Assurance Requirements

##### Security assurance requirements added to reach EAL5 ([Table 10](#))

- 252 Regarding application note 21 of [BSI-PP-0035](#), this Security Target chooses EAL5 because developers and users require a high level of independently assured security in a planned development and require a rigorous development approach without incurring unreasonable costs attributable to specialist security engineering techniques.
- 253 EAL5 represents a meaningful increase in assurance from EAL4 by requiring semiformal design descriptions, a more structured (and hence analyzable) architecture, and improved mechanisms and/or procedures that provide confidence that the TOE will not be tampered during development.
- 254 The assurance components in an evaluation assurance level (EAL) are chosen in a way that they build a mutually supportive and complete set of components. The requirements chosen for augmentation do not add any dependencies, which are not already fulfilled for the corresponding requirements contained in EAL5. Therefore, these components add additional assurance to EAL5, but the mutual support of the requirements and the internal consistency is still guaranteed.
- 255 Note that detailed and updated refinements for assurance requirements are given in [Section 7.3](#).

##### Dependencies of assurance requirements

- 256 Dependencies of security assurance requirements are fulfilled by the EAL5 package selection.
- 257 Augmentation to this package are identified in paragraph [205](#) and do not introduce dependencies not already satisfied by the EAL5 package.

## 8 TOE summary specification

258 This section demonstrates how the TOE meets each Security Functional Requirement, which will be further detailed in the ADV\_FSP documents.

259 The complete TOE summary specification has been presented and evaluated in the ST33G platform ST33G1M2A1 maskset K8H0A version H with firmware revision 1.3.2, optional cryptographic library NesLib 6.0.3, and optional library SFM 1.0.7 - SECURITY TARGET.

260 For confidentiality reasons, the TOE summary specification is not fully reproduced here.

### 8.1 Limited fault tolerance (FRU\_FLT.2)

261 The TSF provides limited fault tolerance, by managing a certain number of faults or errors that may happen, related to memory contents, CPU, random number generation and cryptographic operations, thus preventing risk of malfunction.

### 8.2 Failure with preservation of secure state (FPT\_FLS.1)

262 The TSF provides preservation of secure state by detecting and managing the following events, resulting in an immediate reset:

- 1 Die integrity violation detection,
- 1 Errors on memories,
- 1 Glitches,
- 1 High voltage supply,
- 1 CPU errors,
- 1 MPU errors,
- 1 External clock incorrect frequency,
- 1 etc..

263 The ES can generate a software reset.

### 8.3 Limited capabilities (FMT\_LIM.1) [Test]

264 The TSF ensures that only very limited test capabilities are available in USER configuration, in accordance with SFP\_1: Limited capability and availability Policy [Test]. In particular, the extended diagnostic test features do not allow User data to be disclosed or manipulated because the User NVM is fully erased when entering this mode.

### 8.4 Limited capabilities (FMT\_LIM.1) [Admin]

265 The TSF ensures that the Secure Flash Loader and the final test capabilities are unavailable in USER configuration, in accordance with SFP\_4: Limited capability and availability Policy [Admin].



## 8.5 Limited availability (FMT\_LIM.2) [Test] & [Admin]

266 The TOE is either in TEST, ADMIN or USER configuration.

267 The only authorised TOE configuration modifications are:

- 1 TEST to ADMIN configuration,
- 1 TEST to USER configuration,
- 1 ADMIN to USER configuration.

268 The TSF ensures the switching and the control of TOE configuration.

269 The TSF reduces the available features depending on the TOE configuration.

## 8.6 Audit storage (FAU\_SAS.1)

270 In Admin configuration, the TOE provides commands to store data and/or pre-personalisation data and/or supplements of the ES in the NVM. These commands are only available to authorized processes, and only until phase 6.

## 8.7 Resistance to physical attack (FPT\_PHP.3)

271 The TSF ensures resistance to physical tampering, thanks to the following features:

- 1 The TOE implements counter-measures that reduce the exploitability of physical probing.
- 1 The TOE is physically protected by an active shield that commands an automatic reaction on die integrity violation detection.

## 8.8 Basic internal transfer protection (FDP\_ITT.1), Basic internal TSF data transfer protection (FPT\_ITT.1) & Subset information flow control (FDP\_IFC.1)

272 The TSF prevents the disclosure of internal and user data thanks to:

- 1 Memories scrambling and encryption,
- 1 Bus encryption,
- 1 Mechanisms for operation execution concealment,
- 1 etc..

## 8.9 Random number generation (FCS\_RNG.1)

273 The TSF provides 8-bit true random numbers that can be qualified with the test metrics required by the [BSI-AIS20/AIS31](#) standard for a PTG.2 class device.

## 8.10 Cryptographic operation: DES / 3DES operation (FCS\_COP.1 [EDES])

- 274 The TOE provides an EDES accelerator that has the capability to perform a DES encryption and a DES decryption conformant to [NIST SP 800-67](#), and a Triple DES encryption and decryption in Electronic Code Book (ECB) and Cipher Block Chaining (CBC) mode conformant to [NIST SP 800-67](#) and [NIST SP 800-38A](#).  
Note that DES and triple DES with two keys are no longer recommended as encryption functions in the context of smart card applications. Hence, Security IC Embedded Software may need to use triple DES with three keys to achieve a suitable strength.
- 275 If [NesLib](#) is embedded, the cryptographic library NesLib instantiates the same standard DES cryptographic operations.

## 8.11 Cryptographic operation: AES operation (FCS\_COP.1 [AES])

- 276 The AES accelerator provides the following standard AES cryptographic operations for key sizes of 128, 192 and 256 bits, conformant to [FIPS PUB 197](#) with intrinsic counter-measures against attacks:
- 1 key expansion,
  - 1 cipher,
  - 1 inverse cipher.
- 277 If NesLib is embedded, the cryptographic library NesLib instantiates the same standard AES cryptographic operations, and provides:
- 1 message authentication Code computation (CMAC).

## 8.12 Cryptographic operation: RSA operation (FCS\_COP.1 [RSA]) if [NesLib](#) only

- 278 The cryptographic library NesLib provides the RSA public key cryptographic operation for modulus sizes up to 4096 bits, conformant to [PKCS #1 V2.1](#).
- 279 The cryptographic library NesLib provides the RSA private key cryptographic operation with or without CRT for modulus sizes up to 4096 bits, conformant to [PKCS #1 V2.1](#).
- 280 The cryptographic library NesLib provides RSA signature formatting (EMSA) compliant with [PKCS #1 V2.1](#).

### 8.13 Cryptographic operation: Elliptic Curves Cryptography operation (FCS\_COP.1 [ECC]) if NesLib only

281 The cryptographic library NesLib provides to the ES developer the following efficient basic functions for Elliptic Curves Cryptography over prime fields, all conformant to [IEEE 1363-2000](#) chapter 7 and [IEEE 1363a-2004](#):

- 1 private scalar multiplication,
- 1 preparation of Elliptic Curve computations in affine coordinates,
- 1 public scalar multiplication,
- 1 point validity check,
- 1 Jacobian conversion to affine coordinates,
- 1 general point addition,
- 1 point expansion and compression.

282 Additionally, the cryptographic library NesLib provides functions dedicated to the two most used elliptic curves cryptosystems:

- 1 Elliptic Curve Diffie-Hellman (ECDH), as specified in [NIST SP 800-56A](#),
- 1 Elliptic Curve Digital Signature Algorithm (ECDSA) generation and verification, as stipulated in [FIPS 186-4](#) and specified in [ANSI X9.62](#), section 7.

### 8.14 Cryptographic operation: SHA-1 and SHA-2 operation (FCS\_COP.1 [SHA]) if NesLib only

283 The cryptographic library NesLib provides the SHA-1, SHA-224, SHA-256, SHA-384, SHA-512 secure hash functions conformant to [FIPS PUB 180-2](#).

284 The cryptographic library NesLib provides the SHA-1 and SHA-256 secure hash function conformant to [FIPS PUB 180-2](#) and offering resistance against side channel and fault attacks.

285 Additionally, the cryptographic library NesLib offers support for the HMAC mode of use, as specified in [FIPS PUB 198-1](#), to be used in conjunction with the protected versions of SHA-1 and SHA-256.

286 Note that SHA-1 is no longer recommended as a cryptographic function. Hence, Security IC Embedded Software may need to use another SHA to achieve a suitable strength.

### 8.15 Cryptographic operation: Keccak & SHA-3 operation (FCS\_COP.1 [Keccak]) if NesLib only

287 The cryptographic library NesLib provides the operation of the following extendable output functions conformant to [FIPS PUB 202](#):

- 1 SHAKE128,
- 1 SHAKE256,
- 1 Keccak[r,c] with choice of  $r < 1600$  and  $c = 1600 - r$ .

- 288 The cryptographic library NesLib provides the operation of the following hash functions, conformant to [FIPS PUB 202](#):
- 1 SHA3-224,
  - 1 SHA3-256,
  - 1 SHA3-384,
  - 1 SHA3-512.
- 289 The cryptographic library NesLib provides the operation of the following extendable output functions conformant to [FIPS PUB 202](#), offering resistance against side channel and fault attacks:
- 1 SHAKE128,
  - 1 SHAKE256,
  - 1 Keccak[r,c] with choice of  $r < 1600$  and  $c = 1600 - r$ .
- 290 The cryptographic library NesLib provides the operation of the following hash functions, conformant to [FIPS PUB 202](#), offering resistance against side channel and fault attacks:
- 1 SHA3-224,
  - 1 SHA3-256,
  - 1 SHA3-384,
  - 1 SHA3-512.

## 8.16 Cryptographic operation: Keccak-p operation (FCS\_COP.1 [Keccak-p]) if NesLib only

- 291 The cryptographic library NesLib provides a toolbox for building modes on top of the following permutations, conformant to [FIPS PUB 202](#):
- 1 Keccak-p[1600,n\_r = 24],
  - 1 Keccak-p[1600,n\_r = 12].
- 292 The cryptographic library NesLib provides a toolbox for building modes on top of the following permutations, conformant to [FIPS PUB 202](#), offering resistance against side channel and fault attacks:
- 1 Keccak-p[1600,n\_r = 24],
  - 1 Keccak-p[1600,n\_r = 12].

## 8.17 Cryptographic operation: Diffie-Hellman operation (FCS\_COP.1 [Diffie-Hellman]) if NesLib only

- 293 The cryptographic library NesLib provides the Diffie-Hellman key establishment operation over  $GF(p)$  for size of modulus  $p$  up to 4096 bits, conformant to [ANSI X9.42](#).

## 8.18 Cryptographic operation: DRBG operation (FCS\_COP.1 [DRBG]) if NesLib only

- 294 The cryptographic library NesLib gives support for a DRBG generator, based on cryptographic algorithms specified in [NIST SP 800-90](#).

295 The cryptographic library NesLib implements two of the DRBG specified in [NIST SP 800-90](#):  
1 Hash-DRBG,  
1 CTR-DRBG.

### 8.19 Cryptographic key generation: Prime generation (FCS\_CKM.1 [Prime\_generation]) if NesLib only

296 The cryptographic library NesLib provides prime numbers generation for key sizes up to 2048 bits conformant to [FIPS PUB 140-2](#) and [FIPS 186-4](#), optionally with conditions and/or optionally offering resistance against side channel and fault attacks.

### 8.20 Cryptographic key generation: RSA key generation (FCS\_CKM.1 [RSA\_key\_generation]) if NesLib only

297 The cryptographic library NesLib provides standard RSA public and private key computation for key sizes upto 4096 bits conformant to [FIPS PUB 140-2](#), [ISO/IEC 9796-2](#) and [PKCS #1 V2.1](#), optionally with conditions and/or optionally offering resistance against side channel and fault attacks.

### 8.21 Static attribute initialisation (FMT\_MSA.3) [Memories]

298 The TOE enforces a default memory protection policy when none other is programmed by the ES.

### 8.22 Management of security attributes (FMT\_MSA.1) [Memories] & Specification of management functions (FMT\_SMF.1) [Memories]

299 The TOE provides a dynamic Memory Protection Unit (MPU), that can be configured by the ES.

### 8.23 Complete access control (FDP\_ACC.2) [Memories] & Security attribute based access control (FDP\_ACF.1) [Memories]

300 The TOE enforces the dynamic memory protection policy for data access and code access thanks to a dynamic Memory Protection Unit (MPU), programmed by the ES. Overriding the MPU set of access rights, the TOE enforces additional protections on specific parts of the memories.

## 8.24 Import of user data without security attributes (FDP\_ITC.1) [Loader]

301 In Admin configuration, the System Firmware provides the capability of securely loading user data into the NVM (Secure Flash Loader). The data is automatically decrypted. The integrity of the loaded data is systematically checked, and the integrity of the NVM can also be checked by the ES.

## 8.25 Static attribute initialisation (FMT\_MSA.3) [Loader]

302 In Admin configuration, the System Firmware provides restrictive default values for the Flash Loader security attributes.

## 8.26 Management of security attributes (FMT\_MSA.1) [Loader] & Specification of management functions (FMT\_SMF.1) [Loader]

303 In Admin configuration, the System Firmware provides the capability to change part of the Flash Loader security attributes, only once in the product lifecycle.

## 8.27 Subset access control (FDP\_ACC.1) [Loader] & Security attribute based access control (FDP\_ACF.1) [Loader]

304 In Admin configuration, the System Firmware grants access to the Flash Loader functions, only after presentation of the required valid passwords.

## 8.28 Subset access control (FDP\_ACC.1) [APPLI\_FWL] & Security attribute based access control (FDP\_ACF.1) [APPLI\_FWL]

305 The Library Protection Unit is used to isolate the Protected Application (code and data) from the rest of the code embedded in the device.

## 8.29 Static attribute initialisation (FMT\_MSA.3) [APPLI\_FWL]

306 At product start, all the static attributes are initialised, which are needed to protect the segments where the Protected Application code and data are stored.

## 9 References

### 307 Protection Profile references

Component description	Reference	Revision
Security IC Platform Protection Profile	BSI-PP-0035	1.0

### 308 ST33G Platform Security Target reference

Component description	Reference
ST33G platform ST33G1M2A1 maskset K8H0A version H with firmware revision 1.3.2, optional cryptographic library NesLib 6.0.3, and optional library SFM 1.0.7 - SECURITY TARGET	SMD_ST33G_ST_16_001

### 309 Guidance documentation references

Component description	Reference	Revision
ST33G1M2A: Secure MCU with 32-bit ARM SecurCore SC300 - Datasheet	DS_ST33G1M2A	1
ST33G1M2A ST33G1M2M Die description: CMOS M10+ 80-nm technology die and wafer delivery description	DD_ST33G1M2	4
ARM® Cortex SC300 r0p0 Technical Reference Manual	ARM DDI 0337F	F
ARM® Cortex M3 r2p0 Technical Reference Manual	ARM DDI 0337F3c	F3c
ARM® SC300 r0p0 SecurCore Technical Reference Manual Supplement 1A	ARM DDI 0337 Supp 1A	A
ARM® SecurCore SC300 technical limitations	ES_SC300	1
ST33 ARM Execute-only memory support for SecurCore® SC300 devices - Application note	AN_33_EXE	2
ST33 uniform timing application note	AN_33_UT	2
ST33G1M2A Firmware - User manual	UM_ST33G1M2A_M_FW	6
ST33G and ST33H Firmware support for LPU regions - Application Note	AN_33G_33H_LPU	1
NesLib cryptographic library NesLib 6.0 - User manual	UM_NesLib_6.0	2
ST33 Secure MCU platforms NesLib 6.0 security recommendations - Application note	AN_SECU_ST33_NESLIB_6.0	1
NesLib 6.0.3 for ST33 platforms - Release note	RN_ST33_NESLIB_6.0.3	1
StoreKeeper v1.0 - User manual	UM_StoreKeeper	3
Security recommendation Application Note SFM Library 1.0	AN_SECU_StoreKeeper	1

Component description	Reference	Revision
ST33G and ST33H - AIS31 Compliant Random Number user manual	UM_33G_33H_AIS31	3
ST33G and ST33H - AIS31 Reference implementation - Startup, online and total failure tests - Application note	AN_33G_33H_AIS31	1
ST33G and ST33H Secure MCU platforms - Security Guidance	AN_SECU_ST33	5
ST33G and ST33H Power supply glitch detector characteristics - application note	AN_33_GLITCH	2
Flash memory loader installation guide for the ST33G1M2A and ST33G1M2M platforms	UM_33GA_FL	3
ST33G1M2A/ST33G1M2M Diagnostic User Manual	UM_ST33G1M2A_M_DIAG	4

## 310

## Standards references

Ref	Identifier	Description
[1]	BSI-AIS20/AIS31	A proposal for: Functionality classes for random number generators, W. Killmann & W. Schindler BSI, Version 2.0, 18-09-2011
[2]	NIST SP 800-67	NIST SP 800-67, Recommendation for the Triple Data Encryption Algorithm (TDEA) Block Cipher, revised January 2012, National Institute of Standards and Technology
[3]	FIPS PUB 140-2	FIPS PUB 140-2, Security Requirements for Cryptographic Modules, National Institute of Standards and Technology (NIST), up to change notice December 3, 2002
[4]	FIPS PUB 180-2	FIPS PUB 180-2 Secure Hash Standard with Change Notice 1 dated February 25, 2004, National Institute of Standards and Technology, U.S.A., 2004
[5]	FIPS 186-4	FIPS PUB 186-4, Digital Signature Standard (DSS), National Institute of Standards and Technology (NIST), July 2013
[6]	FIPS PUB 197	FIPS PUB 197, Advanced Encryption Standard (AES), National Institute of Standards and Technology, U.S. Department of Commerce, November 2001
[7]	ISO/IEC 9796-2	ISO/IEC 9796, Information technology - Security techniques - Digital signature scheme giving message recovery - Part 2: Integer factorization based mechanisms, ISO, 2002
[8]	NIST SP 800-38A	NIST SP 800-38A Recommendation for Block Cipher Modes of Operation, 2001, with Addendum Recommendation for Block Cipher Modes of Operation: Three Variants of Ciphertext Stealing for CBC Mode, October 2010
[9]	ISO/IEC 14888	Information technology - Security techniques - Digital signatures with appendix - Part 1: General (1998), Part 2: Identity-based mechanisms (1999), Part 3: Certificate based mechanisms (2006), ISO
[10]	CCMB-2012-09-001	Common Criteria for Information Technology Security Evaluation - Part 1: Introduction and general model, September 2012, version 3.1 Revision 4



Ref	Identifier	Description
[11]	CCMB-2012-09-002	Common Criteria for Information Technology Security Evaluation - Part 2: Security functional components, September 2012, version 3.1 Revision 4
[12]	CCMB-2012-09-003	Common Criteria for Information Technology Security Evaluation - Part 3: Security assurance components, September 2012, version 3.1 Revision 4
[13]	AUG	Smartcard Integrated Circuit Platform Augmentations, Atmel, Hitachi Europe, Infineon Technologies, Philips Semiconductors, Version 1.0, March 2002.
[14]	MIT/LCS/TR-212	On digital signatures and public key cryptosystems, Rivest, Shamir & Adleman Technical report MIT/LCS/TR-212, MIT Laboratory for computer sciences, January 1979
[15]	IEEE 1363-2000	IEEE 1363-2000, Standard Specifications for Public Key Cryptography, IEEE, 2000
[16]	IEEE 1363a-2004	IEEE 1363a-2004, Standard Specifications for Public Key Cryptography - Amendment 1:Additional techniques, IEEE, 2004
[17]	PKCS #1 V2.1	PKCS #1 V2.1 RSA Cryptography Standard, RSA Laboratories, June 2002
[18]	MOV 97	Alfred J. Menezes, Paul C. van Oorschot and Scott A. Vanstone, Handbook of Applied Cryptography, CRC Press, 1997
[19]	NIST SP 800-38B	NIST special publication 800-38B, Recommendation for Block Cipher Modes of Operation: The CMAC Mode for Authentication, National Institute of Standards and Technology (NIST), May 2005
[20]	NIST SP 800-90	NIST Special Publication 800-90, Recommendation for random number generation using deterministic random bit generators (Revised), National Institute of Standards and Technology (NIST), March 2007
[21]	FIPS PUB 198-1	FIPS PUB 198-1, The Keyed-Hash Message Authentication Code (HMAC), National Institute of Standards and Technology (NIST), July 2008
[22]	NIST SP 800-56A	NIST SP 800-90A Revision 2, Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography, National Institute of Standards and Technology (NIST), May 2013
[23]	FIPS PUB 202	FIPS PUB 202, SHA-3 Standard: Permutation-Based Hash and Extendable-Output Functions, August 2015
[24]	ANSI X9.31	ANSI X9.31, Digital Signature Using Reversible Public Key Cryptography for the Financial Services Industry (rDSA), American National Standard for Financial Services, 1998

Ref	Identifier	Description
[25]	ANSI X9.42	ANSI X9.42, Public Key Cryptography for the Financial Services Industry: Agreement of Symmetric Keys Using Discrete Logarithm Cryptography, American National Standard for Financial Services, 2003 (R2013)
[26]	ANSI X9.62	ANSI X9.62, Public Key Cryptography for the Financial Services Industry, The Elliptic Curve Digital Signature Algorithm (ECDSA), American National Standard for Financial Services, 2005

## Appendix A Glossary

### A.1 Terms

**Authorised user**

A user who may, in accordance with the TSP, perform an operation.

**Composite product**

Security IC product which includes the Security Integrated Circuit (i.e. the TOE) and the Embedded Software and is evaluated as composite target of evaluation.

**End-consumer**

User of the Composite Product in Phase 7.

**Integrated Circuit (IC)**

Electronic component(s) designed to perform processing and/or memory functions.

**IC Dedicated Software or Firmware**

IC proprietary software embedded in a Security IC (also known as IC firmware) and developed by **ST**. Such software is required for testing purpose (IC Dedicated Test Software) but may provide additional services to facilitate usage of the hardware and/or to provide additional services (IC Dedicated Support Software).

**IC Dedicated Test Software**

That part of the IC Dedicated Software which is used to test the TOE before TOE Delivery but which does not provide any functionality thereafter.

**IC developer**

Institution (or its agent) responsible for the IC development.

**IC manufacturer**

Institution (or its agent) responsible for the IC manufacturing, testing, and pre-personalization.

**IC packaging manufacturer**

Institution (or its agent) responsible for the IC packaging and testing.

**Initialisation data**

Initialisation Data defined by the TOE Manufacturer to identify the TOE and to keep track of the Security IC's production and further life-cycle phases are considered as belonging to the TSF data. These data are for instance used for traceability and for TOE identification (identification data)

**Object**

An entity within the TSC that contains or receives information and upon which subjects perform operations.

**Packaged IC**

Security IC embedded in a physical package such as micromodules, DIPs, SOICs or TQFPs.

**Pre-personalization data**

Any data supplied by the Card Manufacturer that is injected into the non-volatile memory by the Integrated Circuits manufacturer (Phase 3). These data are for instance used for traceability and/or to secure shipment between phases.

**Secret**

Information that must be known only to authorised users and/or the TSF in order to enforce a specific SFP.

**Security IC**

Composition of the TOE, the Security IC Embedded Software, User Data, and the package.

**Security IC Embedded SoftWare (ES)**

Software embedded in the Security IC and not developed by the IC designer. The Security IC Embedded Software is designed in Phase 1 and embedded into the Security IC in Phase 3.

**Security IC embedded software (ES) developer**

Institution (or its agent) responsible for the security IC embedded software development and the specification of IC pre-personalization requirements, if any.

**Security attribute**

Information associated with subjects, users and/or objects that is used for the enforcement of the TSP.

**Sensitive information**

Any information identified as a security relevant element of the TOE such as:

- the application data of the TOE (such as IC pre-personalization requirements, IC and system specific data),
- the security IC embedded software,
- the IC dedicated software,
- the IC specification, design, development tools and technology.

**Side channel attacks**

Attack that takes advantage of a physical leakage of the device.

**Smartcard**

A card according to ISO 7816 requirements which has a non volatile memory and a processing unit embedded within it.

**Subject**

An entity within the TSC that causes operations to be performed.

**Test features**

All features and functions (implemented by the IC Dedicated Software and/or hardware) which are designed to be used before TOE Delivery only and delivered as part of the TOE.

**TOE Delivery**

The period when the TOE is delivered which is after Phase 3 or Phase 4 in this Security target.

**TSF data**

Data created by and for the TOE, that might affect the operation of the TOE.

**User**

Any entity (human user or external IT entity) outside the TOE that interacts with the TOE.

**User data**

All data managed by the Smartcard Embedded Software in the application context. User data comprise all data in the final Smartcard IC except the TSF data.

## A.2 Abbreviations

**Table 14. List of abbreviations**

Term	Meaning
AES	Advanced Encryption Standard.
AIS	Application notes and Interpretation of the Scheme (BSI).
ALU	Arithmetical and Logical Unit.
BSI	Bundesamt für Sicherheit in der Informationstechnik.
CBC	Cipher Block Chaining.
CC	<a href="#">Common Criteria</a> Version 3.1.
CMAC	Cipher-based Message Authentication Code.
CPU	Central Processing Unit.
CRC	Cyclic Redundancy Check.
DCSSI	Direction Centrale de la Sécurité des Systèmes d'Information
DES	Data Encryption Standard.
DIP	Dual-In-Line Package.
DRBG	Deterministic Random Bit Generator.
EAL	<a href="#">Evaluation Assurance Level</a> .
ECB	Electronic Code Book.
ECC	Elliptic Curve Cryptography.
EDES	Enhanced DES.
EEPROM	Electrically Erasable Programmable Read Only Memory.
ES	Security IC Embedded Software.
FIPS	Federal Information Processing Standard.
FTOS	Final Test Operating System.
GPIO	General Purpose I/O.
HMAC	Keyed-Hash Message Authentication Code.
I/O	Input / Output.
IART	ISO-7816 Asynchronous Receiver Transmitter.
IC	<a href="#">Integrated Circuit</a> .
ISO	International Standards Organisation.
IT	<a href="#">Information Technology</a> .
LPU	Library Protection Unit.
MAC	Message Authentication Code.
MPU	Memory Protection Unit.
NESCRYPT	Next Step Cryptography Accelerator.
NFC	Near Field Communication.

**Table 14. List of abbreviations (continued)**

Term	Meaning
NIST	National Institute of Standards and Technology.
NVM	Non Volatile Memory.
OS	Operating System.
OSP	Organisational Security Policy.
OST	Operating System for Test.
PP	<a href="#">Protection Profile.</a>
PUB	Publication Series.
RAM	Random Access Memory.
ROM	Read Only Memory.
RSA	Rivest, Shamir & Adleman.
SAR	Security Assurance Requirement.
SFM	StoreKeeper Flash Management.
SFP	Security Function Policy.
SFR	Security Functional Requirement.
SHA	Secure Hash Algorithm.
SIM	Subscriber Identity Module.
SOIC	Small Outline IC.
SPI	Serial Peripheral Interface.
ST	Context dependent : STMicroelectronics or <a href="#">Security Target.</a>
SWP	Single Wire Protocol.
TOE	<a href="#">Target of Evaluation.</a>
TQFP	Thin Quad Flat Package.
TRNG	True Random Number Generator.
TSC	<a href="#">TSF Scope of Control.</a>
TSF	<a href="#">TOE Security Functionality.</a>
TSFI	TSF Interface.
TSP	TOE Security Policy.
TSS	TOE Summary Specification.

## 10 Revision history

**Table 15. Document revision history**

<b>Date</b>	<b>Revision</b>	<b>Changes</b>
01-Dec-2016	00.01	Draft creation
24-Apr-2017	00.02	Editorial improvements Update of revisions, guides and sites
29-Jun-2017	01.00	Update of revisions and guides
07-Jul-2017	01.01	Update of guides
27-Oct-2017	01.02	Update of sites

## ST33G Platform Security Target for composition

---

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2017 STMicroelectronics - All rights reserved  
BULL CP8 Patents

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

