

Multiapp ID CIE/CNS Security Target

UPDATES

Date	Author	Modification
April 7,2011	Christine Crippa-Martinez	Creation from evaluated ST (V1.8)

CONTENT

1	ST INTRODUCTION	5
1.1	ST REFERENCE.....	5
1.2	TOE REFERENCE	5
1.3	TOE OVERVIEW.....	6
1.3.1	TOE type.....	7
1.3.2	TOE boundaries.....	7
1.3.3	TOE configurations	8
1.4	REFERENCES, GLOSSARY AND ABBREVIATIONS	9
1.4.1	External references.....	9
1.4.2	Glossary.....	10
1.4.3	Abbreviations.....	11
2	TOE DESCRIPTION	13
2.1	CIE/CNS APPLETT DESCRIPTION.....	13
2.2	TOE LIFE-CYCLE	14
2.2.1	TOE Phases	16
2.2.1.1	TOE Actors & roles.....	16
2.2.1.2	Smart Card product life cycle.....	16
2.2.2	TOE Environment	17
2.2.2.1	Development phase.....	17
2.2.2.2	Production environment.....	18
2.2.2.3	Personalization environment.....	19
2.2.2.4	User environment.....	19
2.3	THE ACTORS AND ROLES.....	19
2.4	TOE INTENDED USAGE	20
3	CONFORMANCE CLAIMS.....	22
3.1	CC CONFORMANCE CLAIM.....	22
3.2	PP CLAIM, PACKAGE CLAIM.....	22
3.3	CONFORMANCE RATIONALE	22
3.4	PP REFERENCE.....	22
3.5	PP REFINEMENTS	22
3.6	PP ADDITIONS.....	26
3.7	ASSURANCE REQUIREMENTS ADDITIONAL TO THE PP	26
4	TOE SECURITY ENVIRONMENT	27
4.1	DIGITAL SIGNATURE ASSETS	27
4.2	DIGITAL SIGNATURE SUBJECTS	27
4.3	DIGITAL SIGNATURE THREATS.....	27
4.4	DIGITAL SIGNATURE ASSUMPTIONS.....	28
4.5	ORGANIZATIONAL SECURITY POLICIES	29
5	SECURITY OBJECTIVES	30
5.1	SECURITY OBJECTIVES FOR THE TOE	30
5.2	SECURITY OBJECTIVES FOR THE OPERATIONAL ENVIRONMENT	31
6	SECURITY REQUIREMENTS.....	32
6.1	TOE SECURITY FUNCTIONAL REQUIREMENTS	32
6.1.1	Security functional requirements list	32
	Cryptographic support.....	33
6.1.2	FCS – Cryptographic support	34
6.1.2.1	FCS_CKM cryptographic key management.....	34
6.1.2.2	FCS_COP Cryptographic operation	34

SECURITY TARGET

TOE CIE/CNS

6.1.3	<i>FDP: User data protection</i>	35
6.1.3.1	FDP_ACC Access Control policy	35
6.1.3.2	FDP_ACF access control function.....	35
6.1.3.3	FDP_ETC :Export to outside TSF control.....	38
6.1.3.4	FDP_ITC Import From outside TSF control.....	38
6.1.3.5	FDP_RIP Residual information protection	39
6.1.3.6	FDP_SDI Stored data integrity	39
6.1.3.7	FDP_UCT Inter-TSF user data confidentiality transfer protection	40
6.1.3.8	FDP_UIT Inter-TSF user data integrity transfer protection	40
6.1.4	<i>FIA: Identification and authentication</i>	40
6.1.4.1	FIA_AFL Authentication failure	40
6.1.4.2	FIA_ATD User attribute definition	41
6.1.4.3	FIA_UAU User authentication	41
6.1.4.4	FIA_UID User Identification	41
6.1.5	<i>FMT: Security management</i>	42
6.1.5.1	FMT_MOF Management of functions in TSF.....	42
6.1.5.2	FMT_MSA Management of security attributes	42
6.1.5.3	FMT_MTD Management of TSF data.....	43
6.1.5.4	FMT_SMF Specification of Management Functions	43
6.1.5.5	FMT_SMR Security management roles	43
6.1.6	<i>FPT: Protection of the TSF</i>	43
6.1.6.1	FPT_AMT Underlying Abstract machine test	43
6.1.6.2	FPT_EMSEC TOE Emanation	44
6.1.6.3	FPT_FLS Failure secure	44
6.1.6.4	FPT_PHP TSF physical Protection.....	44
6.1.6.5	FPT_TST TSF self test.....	45
6.1.7	<i>FTP: Trusted Path / Channel</i>	45
6.1.7.1	FTP_ITC Inter-TSF trusted channel	45
6.1.7.2	FTP_TRP Trusted path	46
6.2	SECURITY ASSURANCE REQUIREMENTS	47
6.2.1	<i>TOE security assurance requirements list</i>	47
6.3	SECURITY REQUIREMENTS FOR THE IT ENVIRONMENT.....	48
6.3.1	<i>Signature key generation (SSCD Type1)</i>	48
6.3.1.1	FCS_CKM.1: Cryptographic key generation.....	48
6.3.1.2	FCS_CKM.4: Cryptographic key destruction.....	48
6.3.1.3	FCS_COP.1: Cryptographic operation	48
6.3.1.4	FDP_ACC.1: Subset access control.....	49
6.3.1.5	FDP_UCT.1: Basic data exchange confidentiality	49
6.3.1.6	FTP_ITC.1: Inter-TSF trusted channel	49
6.3.2	<i>Certification Generation application (CGA)</i>	49
6.3.2.1	FCS_CKM.2	49
6.3.2.2	FCS_CKM.3	49
6.3.2.3	FDP_UIT.1	49
6.3.2.4	FTP_ITC.1	50
6.3.3	<i>Signature creation application (SCA)</i>	50
6.3.3.1	FCS_COP.1	50
6.3.3.2	FDP_UIT.1	50
6.3.3.3	FTP_ITC.1	50
6.3.3.4	FTP_TRP.1	50
6.4	SECURITY REQUIREMENTS FOR THE NON-IT ENVIRONMENT.....	51
7	TOE SUMMARY SPECIFICATION	52
7.1	SF_SIG_AUTHENTICATION: AUTHENTICATION MANAGEMENT	52
7.2	SF_SIG_CRYPTO: CRYPTOGRAPHY MANAGEMENT	52
7.3	SF_SIG_INTEGRITY: INTEGRITY MONITORING.....	53
7.4	SF_SIG_MANAGEMENT: MANAGEMENT OF OPERATIONS AND ACCESS CONTROL	53
7.5	SF_SIG_SECURE_MESSAGING.....	53

SECURITY TARGET
TOE CIE/CNS

FIGURES

Figure 1 - Multiapp ID CIE/CNS Card.....8
Figure 2 - Type 2 and Type 3 SSCD operations.....14
Figure 3 – Product Life Cycle15
Figure 4 - TOE Usage21

TABLES

Table 1. TOE component5
Table 2. Product component.....7
Table 3 – Smart Card Product Life Cycle17
Table 4. PP functional requirements that have been refined23
Table 5. IAS Classic security functional requirements list.....33
Table 6 . TOE security assurance requirements list.....48
Table 7. TOE Security functions List.....52

SECURITY TARGET

TOE CIE/CNS

1 ST INTRODUCTION

1.1 ST REFERENCE

ST Title:	CIE/CNS - Security Target
ST Reference:	D1077254
Origin:	GEMALTO
ITSEF	Serma
Certification scheme:	French (ANSSI)

This ST has been built with:

Common Criteria for Information Technology Security Evaluation Version 2.3 which comprises [CCPART1], [CCPART2], and [CCPART3]

Table 1 gives an overview of the components of the TOE.

Component	Version number	Supplier
Hardmask in ROM	1.0 (MSA081)	Gemalto
Softmask in EEPROM	V05	Gemalto
Micro-controller S3CC91C	0	Samsung
AIS20-certified Deterministic Random Number Generator (DRNG)	2.0	Samsung
TORNADO RSA library	3.5S	Samsung

Table 1. TOE component

1.2 TOE REFERENCE

TOE Title:	CIE/CNS
Product name:	Multiapp ID CIE/CNS
Commercial name:	Multiapp ID CIE/CNS
Product reference:	T1003893

The main objectives of this ST are:

SECURITY TARGET

TOE CIE/CNS

- To introduce TOE and the application (TOE overview),
- To define the scope of the TOE and its security features (TOE description),
- To describe the security environment of the TOE, including the assets to be protected and the threats to be countered by the TOE and its environment during the product development, production and usage (TOE security environment),
- To describe the security objectives of the TOE and its environment supporting in terms of integrity and confidentiality of application data and programs and of protection of the TOE (Security objectives),
- To specify the security requirements which include the TOE security functional requirements, the TOE assurance requirements (Security objectives) and TOE security functions (TOE summary specification).

1.3 TOE OVERVIEW

The Target of Evaluation (TOE) is the **CIE/CNS** application and the functionalities/services provided by the Multiapp software to the CIE/CNS application with the Samsung device S3CC91C identified in the BSI certificate BSI-DSZ-CC-0451-2007 (Reassessment 29/01/2010)

Multiapp implements [JC2.2.1] and [GP2.1.1], and CIE/CNS and ROMed application defined in Table 2.

All application codes are masked in ROM.

The product provides an electronic signature services:

- Signature creation
- Signature verification
- Key importation
- Key generation (on board)

The Gemalto **CIE/CNS** application is compliant with E-sign specifications (PK and SK authentication).

It covers the identity, digital signature and data storage services. The Digital signature key size is 1024 bits or 1536 bits.

The Target Of Evaluation defined in this Security Target is the Secure Signature Creation Device (SSCD) functionalities provided by the CIE/CNS application, supported by the Java Card platform. The other applications are not in the TOE Scope of Control and therefore not part of the evaluation.

The TOE is a Secure Signature Creation Device (SSCD) that provides both SCD/SVD generation and Signature creation as described in the Protection Profile [PP SSCD2] and Protection Profile [PP SSCD3].

TOE Components	Version	Constructor
Micro Controller	S3CC91C rev 0	SAMSUNG
Embedded software (platform)	Multiapp version 1.1	GEMALTO
Digital signature application (Applet)	CIE/CNS version 1.0	GEMALTO
Other non TOE Components	Version	Constructor
Instanciable ROMed applet	MPCOS v 3.8	Gemalto
	OATH v2.10	Gemalto
	PayPass MCHIP Select v2.7	Gemalto
	Biomatch J API v3.0.1 &	Precise Biometrics
	Cryptomanager v2.0,	

SECURITY TARGET
TOE CIE/CNS

Not instanciable ROME applets (entry point deactivated)	IAS classic version 3.0,	GEMALTO
	eID2048 V2.10,	GEMALTO
	Almerys,	GEMALTO
	VSDC v2.7.1	GEMALTO
	Dual PSE	GEMALTO

Table 2. Product component

1.3.1 TOE type

The product is a smartcard including a plastic card and a module performing the interface between reader and the embedded chip. Other smart card product elements (such as holograms, security printing...) are outside the scope of this Security Target. The Target of Evaluation (TOE) is the Smart Card Integrated Circuit with Embedded Software in operation and in accordance to its functional specifications.

1.3.2 TOE boundaries

The TOE is composed of the IC, the software platform and a digital signature application:

- **S3CC91C** IC including its crypto libraries, which has been certified separately according to [IC-ST] claiming [PP/BSI-0002]
- **Multiapp** platform (see detail in [ST_ADRIATIC_PLTF])
- **CIE/CNS** application

The TSFs are composed of:

1. The digital-signature related functions of the **CIE/CNS** application: Signatory Authentication, Signature Creation, SCD/SVD Generation, SCD Import & storage, SVD Export, RAD Import & storage.
2. Part of Multiapp platform that installs and supports the **CIE/CNS** application.
3. The **S3CC91C** IC including its crypto libraries to supports the Multiapp platform.

Figure 1 represents the product. The TOE is bordered with bold and un-continuous line. The architecture of Multiapp inside the TOE is presented in [ST_ADRIATIC_PLTF].

SECURITY TARGET
TOE CIE/CNS

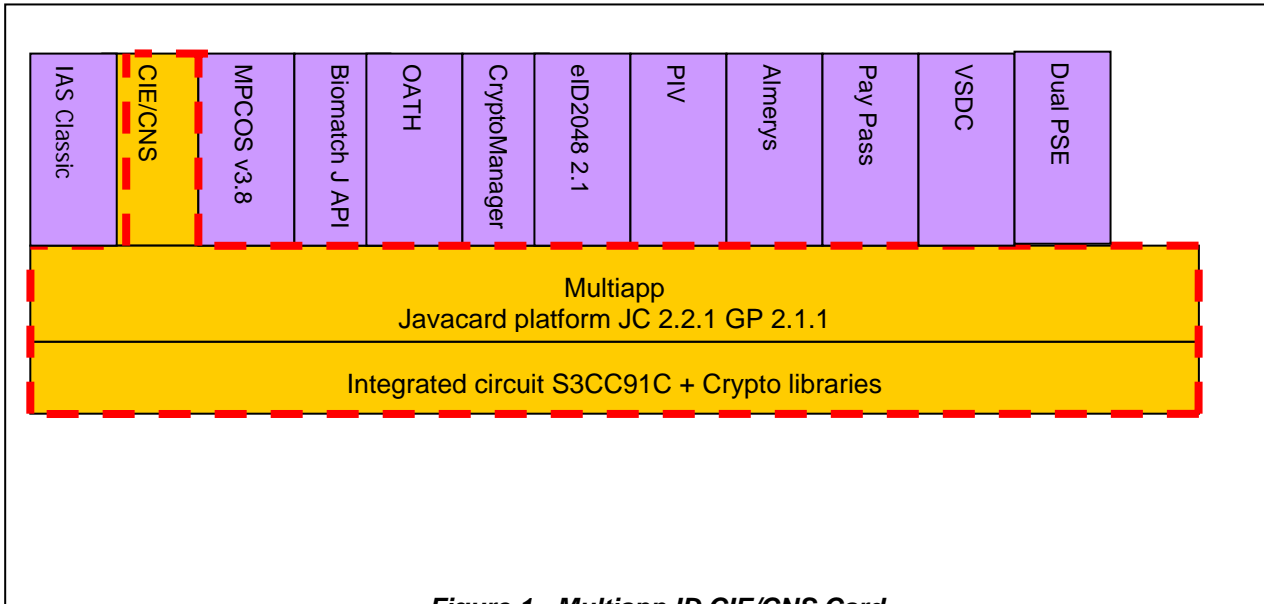


Figure 1 - Multiapp ID CIE/CNS Card

Beside the TOE, the product also contains the following Java Card applications:

- **Applets ROMed:**
 - **IAS classic** provides the digital signature services (but is not included in the TOE).
 - **MPCOS v3.8** provides secure data storage and e-purse services.
 - **OATH** provides One-Time-Password (OTP) authentication service following the OATH standard.
 - **Biomatch C API & Cryptomanager** provide the biometric Match-On-Card service (by Precise Biometrics).
 - **EID2048** provides public-key based cryptographic services and file management.
 - **PIV** provides secure data storage and key management services.
 - **Almersys** provides secure data storage and file management services dedicated to a French mutual group.
 - **Pay Pass MCHIP Select, VSDC, Dual PSE** provide the EMV payment service.

1.3.3 TOE configurations

The TOE defined in this Security Target is the electronic signature functionalities provided by the **CIE** application, and supported by the MultiApp platform. The other applications are not in the TOE scope and therefore not part of the evaluation. The final product can be configured as described in table 2.

SECURITY TARGET

TOE CIE/CNS

1.4 REFERENCES, GLOSSARY AND ABBREVIATIONS

1.4.1 External references

Reference	Title - Reference
[CCPART1]	Common Criteria for Information Technology Security Evaluation Part 1: Introduction and general model CCIMB-2005-08-001, version 2.3, August 2005 (conform to ISO 15408).
[CCPART2]	Common Criteria for Information Technology Security Evaluation Part 2: Security Functional Requirements CCIMB-2005-08-002, version 2.3, August 2005 (conform to ISO 15408).
[CCPART3]	Common Criteria for Information Technology security Evaluation Part 3: Security Assurance Requirements CCIMB-2005-08-003, version 2.3, August 2005 (conform to ISO 5408).
[CEM]	Common Methodology for Information Technology Security Evaluation CCIMB-2005-08-004, version 2.3, August 2005.
[PP SSCD1]	Protection Profile Creation Device Type 1 Version 1.05 BSI-PP-0004-2002T- 03-04-2002
[PP SSCD2]	Protection Profile Creation Device Type 2 Version 1.04 BSI-PP-0005-2002T-03-04-2002
[PP SSCD3]	Protection Profile Creation Device Type 3 Version 1.05 BSI-PP-0006-2002T-03-04-2002
[PP/BSI-0002]	Smartcard IC Platform Protection Profile - BSI-PP-0002; Version 1.0, July 2001
[DIRECTIVE]	DIRECTIVE 1999/93/EC of the European Parliament and of the Council of 13 December 1999 on a Community Framework for electronic signatures" DIRECTIVE 1999/93/EC
[E-Sign 1]	Application Interface for Smart Cards used as Secure Signature Creation Device CEN/ISSS WS/E-Sign Draft CWA Group K part 1 – Basic requirements. Version 1 Release 9 (17th September 2003)
[E-Sign 2]	Application Interface for Smart Cards used as Secure Signature Creation Device CEN/ISSS WS/E-Sign Draft CWA Group K part 2 – Additional services. Version 0 Release:19 (12th December 2003)
[IC-ST]	Security Target of S3CC91C (Samsung) 16-bit RISC Microcontroller for Smart Cards. Version 1.0, August 2007.
[CC-COMP]	Composite product evaluation for Smart Card and similar devices – ISCI-WG1
[JC2.2.1]	Java Card 2.2.1 Virtual Machine - 2.2.1 - Oct 2003
[JCRE221]	Java Card™ Runtime Environment Specification version 2.2.1, Sun Microsystems, Inc, 2003.
[JCAPI221]	Java Card™ APIs specification version 2.2.1, Sun Microsystems, Inc, June 23, 2003.
[GP2.1.1]	Global Platform - Card specification v2.1.1 - 2.1.1 - March 2003

1.4.2 Glossary

CEN workshop agreement (CWA) is a consensus-based specification, drawn up in an open workshop environment of the European Committee for Standardization (CEN). This Protection Profile (PP) represents Annex A to the CWA that has been developed by the European Electronic Signature Standardization Initiative (EESSI) CEN/ISSS electronic signature (E-SIGN) workshop, Area F on secure signature-creation devices (SSCD).

Certificate means an electronic attestation which links the SVD to a person and confirms the identity of that person. (defined in the Directive [1], article 2.9)

Certification generation application (CGA) means a collection of application elements which requests the SVD from the SSCD for generation of the qualified certificate. The CGA stipulates the generation of a correspondent SCD / SVD pair by the SSCD, if the requested SVD has not been generated by the SSCD yet. The CGA verifies the authenticity of the SVD by means of

- (a) the SSCD proof of correspondence between SCD and SVD and
- (b) checking the sender and integrity of the received SVD.

Certification-service-provider (CSP) means an entity or a legal or natural person who issues certificates or provides other services related to electronic signatures. (defined in the Directive [1], article 2.11)

Data to be signed (DTBS) means the complete electronic data to be signed (including both user message and signature attributes).

Data to be signed representation (DTBS-representation) means the data sent by the SCA to the TOE for signing and is

- a hash-value of the DTBS or
- an intermediate hash-value of a first part of the DTBS and a remaining part of the DTBS or the DTBS.

The SCA indicates to the TOE the case of DTBS-representation, unless implicitly indicated. The hash-value in case (a) or the intermediate hash-value in case (b) is calculated by the SCA. The final hash-value in case (b) or the hash-value in case (c) is calculated by the TOE.

Qualified certificate means a certificate which meets the requirements laid down in Annex I of the Directive [1] and is provided by a CSP who fulfils the requirements laid down in Annex II of the Directive [1]. (defined in the Directive [1], article 2.10)

Qualified electronic signature means an advanced signature which is based on a qualified certificate and which is created by a SSCD according to the Directive [1], article 5, and paragraph 1.

Reference authentication data (RAD) means data persistently stored by the TOE for verification of the authentication attempt as authorized user.

Secure signature-creation device (SSCD) means configured software or hardware which is used to implement the SCD and which meets the requirements laid down in Annex III of the Directive [1]. (SSCD is defined in the Directive [1], article 2.5 and 2.6).

Signatory means a person who holds a SSCD and acts either on his own behalf or on behalf of the natural or legal person or entity he represents. (defined in the Directive [1], article 2.3)

Signature attributes means additional information that is signed together with the user message.

SECURITY TARGET

TOE CIE/CNS

Signature-creation application (SCA) means the application used to create an electronic signature, excluding the SSCD. I.e., the SCA is a collection of application elements

1. to perform the presentation of the DTBS to the signatory prior to the signature process according to the signatory's decision,
2. to send a DTBS-representation to the TOE, if the signatory indicates by specific non-misinterpretable input or action the intend to sign,
3. to attach the qualified electronic signature generated by the TOE to the data or provides the qualified electronic signature as separate data.

Signature-creation data (SCD) means unique data, such as codes or private cryptographic keys, which are used by the signatory to create an electronic signature. (defined in the Directive [1], article 2.4)

Signature-creation system (SCS) means the overall system that creates an electronic signature. The signature-creation system consists of the SCA and the SSCD.

Signature-verification data (SVD) means data, such as codes or public cryptographic keys, which are used for the purpose of verifying an electronic signature. (defined in the Directive [1], article 2.7)

Signed data object (SDO) means the electronic data to which the electronic signature has been attached to or logically associated with as a method of authentication.

Sub-Referential. Consistent set of software components (Example: test scripts, specification documents,). A Sub-referential belongs to a Referential.

SSCD provision service means a service that prepares and provides a SSCD to subscribers.

Tip Revision. The latest revision of a line of development (the trunk or a branch)

User means any entity (human user or external IT entity) outside the TOE that interacts with the TOE.

Verification authentication data (VAD) means authentication data provided as input by knowledge or authentication data derived from user's biometric characteristics.

1.4.3 Abbreviations

Abbreviations	
AVA	Vulnerability Assessment
CC	Common Criteria
CSP	certificate-service-provider
DTBS	Data To Be Signed
IC	Integrated Circuit
OS	Operating System
RAD	Reference Authentication Data
SAR	Security Assurance Requirements
SCD	Signature Creation Data
SF	Security Function
SFR	Security functional requirements
SSCD	Secure Signature Creation Device
ST	Security Target

SECURITY TARGET
TOE CIE/CNS

SVD	Signature Verification Data
TOE	Target Of Evaluation
TSF	TOE Security Functionality
VAD	Verification Authentication Data

2 TOE DESCRIPTION

The description of the Multiapp platform is described in [ST_ADRIATIC_PLTF].

2.1 CIE/CNS APPLET DESCRIPTION

CIE/CNS is a Java Card application that provides a Digital Signature Creation Device [SSCD] as defined in the DIRECTIVE 1999/93/EC of the European Parliament and of the Council of 13 December 1999 on a Community Framework for electronic signatures.

Three Protection Profiles have been defined:

- The SSCD PP Type 1, which is a SCD/SVD generation component without signature creation and verification. The SCD generated on a SSCD Type 1 shall be exported to a SSCD Type 2 over a trusted channel [PP SSCD1].
- The SSCD PP for a TOE Type 2, which is a Signature creation and verification component [PP SSCD2]. This device imports the SCD from a SSCD Type 1
- The SSCD PP for a TOE Type 3, which is combination of the TOE Type 1 and Type 2 – i.e. Generation and Signature creation/verification component [PP SSCD3].

Terminology

In this document the terminology of [PP SSCD2] and [PP SSCD3] is used.

The SSCD Application uses public key encryption. The Signature Creation Data (SCD) is the private key and the Signature Verification Data (SVD) is the public key.

The Signatory's Reference Authentication Data (RAD) is the PIN stored in the card and the Signatory's Verification Authentication Data (VAD) is the PIN provided by the user.

SSCD Application provides the following functions necessary for devices involved in digital electronic signatures:

1. Generate the (SCD) and the correspondent (SVD), or Load the SCD,
2. Create qualified electronic signatures:
 - (a) After allowing for the Data To Be Signed (DTBS) to be displayed correctly by an appropriate environment,
 - (b) Using appropriate hash functions agreed according to [CWA-ALGO] suitable for qualified electronic signatures,
 - (c) After appropriate authentication of the signatory by the TOE itself,
 - (d) Using appropriate cryptographic signature function that employs appropriate cryptographic parameters agreed according to [CWA-ALGO].

The TOE implements all IT security functionalities, which are necessary to ensure the secrecy of the SCD. To prevent the unauthorized usage of the SSCD the TOE provides user authentication and access control. The TOE implements IT measures to support a trusted path to a trusted human interface device. Therefore, the TOE holds Signatory's Reference Authentication Data (RAD) that is used to verify the verification data provided by the user as Signatory's Verification Authentication Data (VAD).

The TOE is initialized by importing an SCD or by generating a pair of SCD and SVD. The SCD is protected so as to be solely used in the signature-creation process by the legitimate signatory during the validity of this SCD/SVD pair.

The TOE stores the SCD and may export the SVD. The SVD corresponding to the signatory's SCD will be included in the certificate of the signatory by the certificate-service-provider (CSP).

When in usage phase, the TOE allows the creation of a new SCD/SVD pair. The previous SCD shall be destroyed before the creation of the new SCD/SVD pair.

SECURITY TARGET
TOE CIE/CNS

The signatory uses a signature-creation system to create electronic signatures. The signature-creation device consists of the TOE.

The SCA presents the DTBS to the signatory and prepares the DTBS-representation that the signatory wishes to sign for performing the cryptographic function of the signature.

The TOE returns the digital electronic signature.

The TOE implements the SSCD of type 2 and type 3, and all functions concerning the SSCD to create electronic signatures in a secure way.

The Figure below shows the type 3 and type 2 TOE operations as defined in [PP SSCD2] & [PP SSCD3].

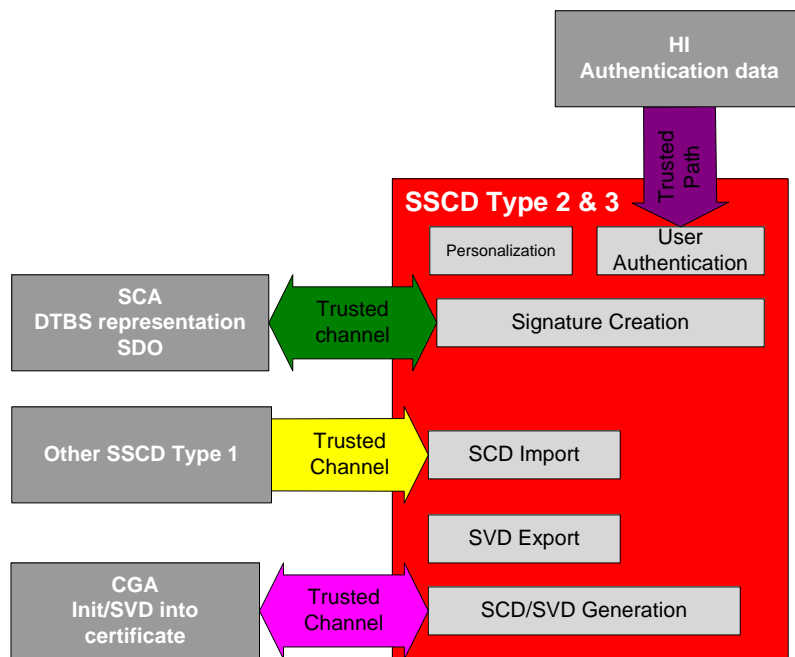


Figure 2 - Type 2 and Type 3 SSCD operations

2.2 TOE LIFE-CYCLE

The product life cycle is described in Figure 3 – Product Life Cycle. Some remarks are added to explain this figure regarding Table 3 – Smart Card Product Life Cycle.

- The TOE is the product at the end of the phase 5 “Smart card product finishing process”.
- **Platform design** and **application design** correspond to the phase 1 “Smart card software development”.
- **Hardware design** corresponds to the phase 2 “IC development”.
- **Hardware fabrication** corresponds to the phase 3 “IC manufacturing and testing”
- **IC packaging and testing** corresponds to the phase 4.
- **Application installation** is done in the phase 5.
- **Loading of softmask** is done in the phase 5.
- **Loading of application data, SCD/SVD import (type 2), and SVD export (for certificate)** are done in the phase 6 “Smart card personalization”.
- **SCD/SVD generation (type 3) and signature creation** correspond to the phase 7 “Smart card end-usage”.
- **SSCD destruction** corresponds to the end of the phase 7.

SECURITY TARGET
TOE CIE/CNS

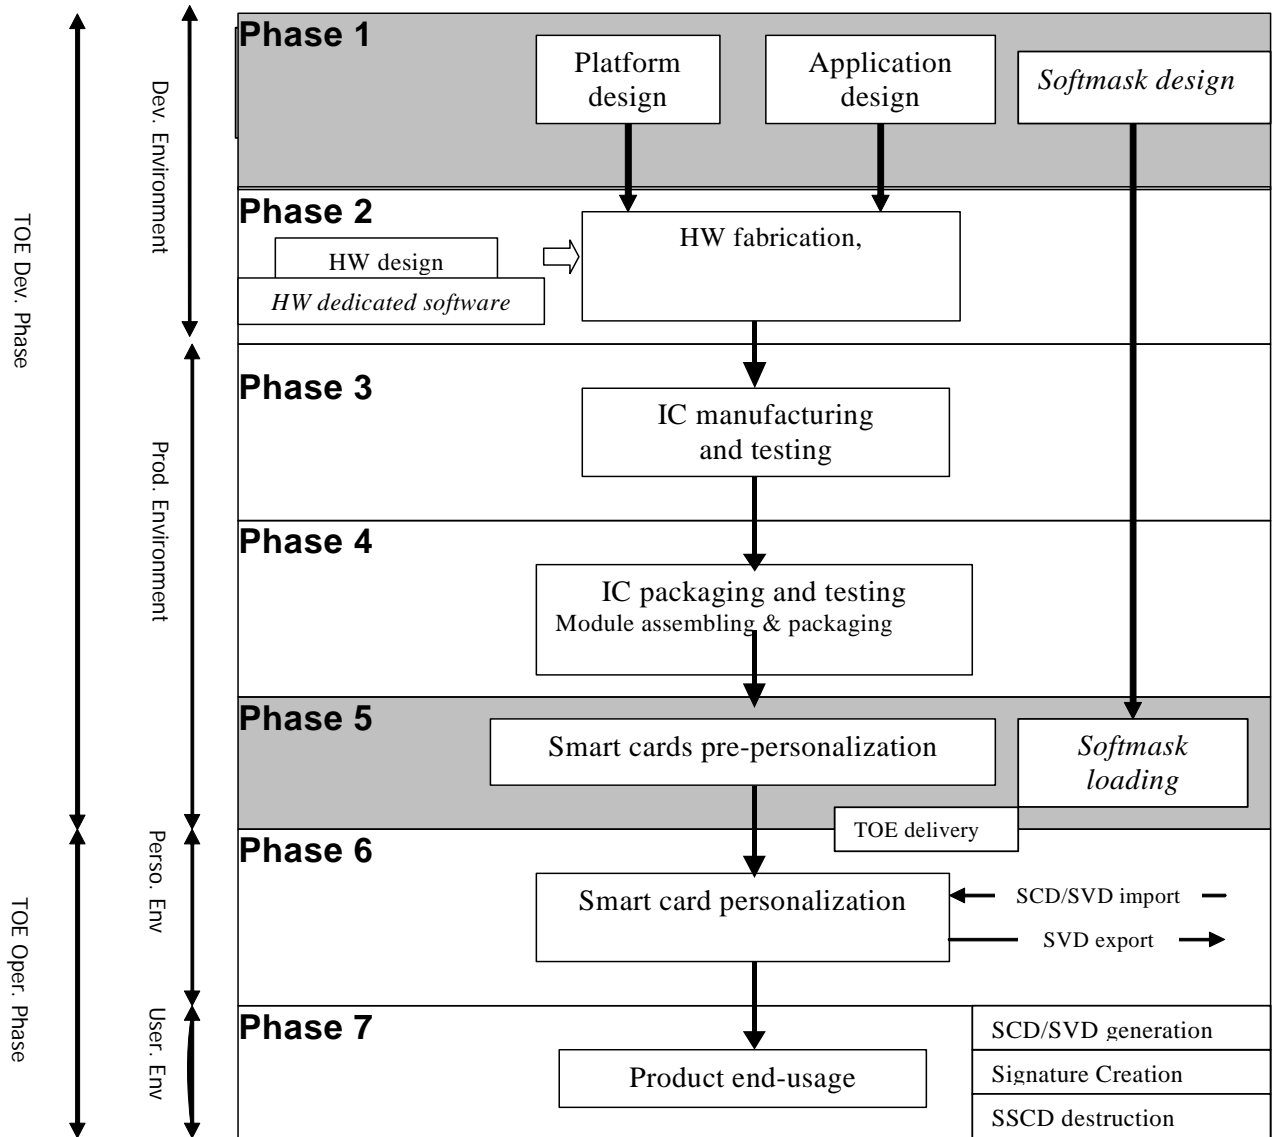


Figure 3 – Product Life Cycle

The global security requirements of the TOE mandate to consider, during the development phase, the threats to security occurring in the other phases. Therefore, this ST addresses the functions used in the phases 6 and 7 but developed during the phases 1 to 5. The limits of the evaluation process correspond to phases 1 to 5 including the TOE under development delivery from the party responsible of each phase to the parties responsible of the following phases.

These different phases may be performed at different sites. This implies that procedures on the delivery process of the TOE must exist and be applied for every delivery within a phase or between phases. This includes any kind of delivery performed from phase 1 to 5 to subsequent phases, including:

- Intermediate delivery of the TOE or the TOE under construction within a phase,
- Delivery of the TOE or the TOE under construction from one phase to the next.

SECURITY TARGET

TOE CIE/CNS

These procedures must be compliant with the security assurance requirements developed in TOE “Security Assurance Requirements” section 6.2. Table 3 gives a description of the product life cycle and explains where the authorities are involved.

2.2.1 TOE Phases

2.2.1.1 TOE Actors & roles

For the digital signature application, two roles have been identified, the Administrator and the Signatory.

1. The Administrator acts during the personalization phase (phase 6). He creates the Signatory's PIN and optionally imports the first SCD into the TOE.

The Signatory that owns the TOE is the End-User in the usage phase (phase 7). He can sign, destroy the SCD and generate a new SCD/SVD pair.

At the first usage of the TOE, the Signatory must change his PIN code before he is allowed to sign. A new PIN is also required each time a new SCD/SVD pair is generated.

2.2.1.2 Smart Card product life cycle

The Smart card product life cycle, as defined in [PP/BSI-0002], is split up into 7 phases where the following authorities are involved:

Phase 1	Smart card software development	The smart card embedded software developer is in charge of the smart card embedded software development and the specification of IC pre-personalization requirements.	
Phase 2	IC Development	The IC designer designs the integrated circuit, develops IC firmware if applicable, provides information, software or tools to the smart card software developer, and receives the software from the developer, through trusted delivery and verification procedures . From the IC design, IC firmware and smart card embedded software, he constructs the smart card IC database, necessary for the IC photo mask fabrication.	
Phase 3	IC manufacturing and testing	The IC manufacturer is responsible for producing the IC through three main steps: IC manufacturing, testing, and IC pre-personalization.	
Phase 4	IC packaging and testing	The IC packaging manufacturer is responsible for the IC packaging and testing.	
Phase 5	Smart card product finishing process	The smart card product manufacturer is responsible for the smart card product finishing process and testing, and the smart card pre-personalization ¹	
Phase 6	Smart card personalization	The Personalizer is responsible for the smart card personalization and final tests. ^{2 3}	Administrator

¹ In maintenance case, pre-issuance applet loading in EEPROM is done by commands “install for Install” and “load”

² In maintenance case, if not done in phase 5, pre-issuance applet loading in EEPROM is done by commands

SECURITY TARGET
TOE CIE/CNS

Phase 7	Smart card end-usage	The smart card issuer is responsible for the smart card product delivery to the smart card end-user , and for the end of life process.	Signatory Administrator
---------	----------------------	--	--------------------------------

Table 3 – Smart Card Product Life Cycle

2.2.2 TOE Environment

The TOE environment is defined as follow:

- For TOE development phase:
 - **Development environment** corresponding to the software developer environment (phase1), and the hardware fabrication environment (phase 2);
 - **Production environment** corresponding to the generation of the masked Integration Circuit (phase 3), the manufacturing of the card (phase 4), the initialization of the JavaCard (phase 5) and the installation of the applet (phase 5), the test operations, and initialization of the JavaCard.
- For TOE operational phase
 - **Personalization environment** corresponding to personalization and testing the loading of TOE application data and the import of the SCD (phase 6), during which the card generates the signatures on behalf of the end user.
 - **User environment** corresponding to card usage (phase 7). End of life environment, during which the TOE is made inapt for the signature creation (end of the phase 7).

Phase 1	Software development (Multiapp, CIE/CNS, softmask) Pre-personalization design	Gemalto Meudon & Gemalto la Ciotat
Phase 2	IC design Hardware fabrication	Samsung Giheung
Phase 3	IC manufacturing & testing	Samsung Giheung
Phase 4	IC packaging & testing Module assembling Module packaging	Gemalto Gemalto
Phase 5	Pre-personalization	Gemalto

2.2.2.1 Development phase

2.2.2.1.1 Software development ((Phase 1)

This environment is limited to GEMALTO Meudon & La ciotat site.

install for "Install" and "load"

³ In maintenance case, applet install could be done by Gemalto or by Card issuer by command "*Install for Install*"

SECURITY TARGET TOE CIE/CNS

In order to ensure security, the environment in which the development takes place must be made secure with access control tracing entries. Furthermore, it is important that all authorized personnel feels involved and fully understands the importance and the rigid implementation of the defined security procedures.

The development begins with the TOE specification. All parties in contact with sensitive information are required to abide by Non-disclosure Agreement.

Design and development of the ES then follows. The engineers use a secure computer system (preventing unauthorized access) to make the conception, design, implementation and test performances.

To ensure security, access to development tools and products elements (PC, emulator, card reader, documentation, source code, etc...) is protected. The protection is based on measures for prevention and detection of unauthorized access. Two levels of protection are applied:

- Access control to GEMALTO Meudon officz, GEMALTO la ciotat office and sensitive areas.
- Access to development data through the use of a secure computer system to design, implement and test software.

Storage of sensitive documents, databases on tapes, diskettes, and printed circuit layout information are in appropriately locked cupboards/safe. Of paramount importance also is the disposal of unwanted data (complete electronic erasures) and documents (e.g. shredding).

Testing, programming and deliveries of the TOE then take place. When these are done offsite, they must be transported and worked on in a secure environment with accountability and traceability of all (good and bad) products.

During the electronic transfer of sensitive data, procedures must be established to ensure that the data arrive, only at the destination and is not accessible at intermediate stages (e.g. stored on a buffer server where system administrators make backup copies). It must also be ensured that transfer is done without modification or alteration.

2.2.2.1.2 Hardware fabrication (Phase 2)

This environment is limited to Samsung sites.

The IC development environment is described in [IC_ST]. A transport key protects the IC delivery from Samsung to Gemalto. We are only interested below in the software aspect of the TOE.

2.2.2.2 Production environment

2.2.2.2.1 IC manufacturing (Phases 3)

This environment is limited to Samsung sites.

The IC manufacturing environment is described in [IC ST].

2.2.2.2.2 IC Packaging (phase 4)

This environment is limited to GEMALTO site, for module assembling, and for module packaging (embedding).

Access to IC packaging and testing is physically protected. The protection is based on measures for prevention and detection of unauthorized access.

During fabrication, phases 3, and 4, all the persons involved in storage and transportation operations should fully understand the importance of the defined security procedures.

Moreover, the environment in which these operations take place must be secured.

2.2.2.2.3 Pre-personalization: Card Initialization and applet installation (phase 5)

SECURITY TARGET TOE CIE/CNS

This environment is limited to GEMALTO site. If the pre-personalization is done on module main site is assembling site used.

Initialization requires a secure environment, which guarantees the integrity and confidentiality of operations.

Access to production is physically protected. The protection is based on measures for prevention and detection of unauthorized access.

During smart card pre-personalization the application data structure is created. At the end of this phase, the ROMed applets entry points are deactivated except CIE/CNS application.

2.2.2.3 Personalization environment

This environment can be GEMALTO site.

Access to personalization site is physically protected. The protection is based on measures for prevention and detection of unauthorized access.

Additional data may be loaded and the SCD may be imported. Then the TOE is issued to the Card Holder (Signatory).

2.2.2.4 User environment

At the end of phase 6, the Card Issuer delivers the Smart Card to the Card Holder.

Once delivered to the Card Holder (phase 7), the TOE can generate the SCD/SVD key pair. The TOE then exports the public part of the key to the Certification Authority for certification.

The TOE is owned by the Card Holder who cannot impose strict security rules. It is the responsibility of the TOE and of the signature protocols to ensure that the signature security requirements are met.

The signatory will generate the SCD/SVD keys pair.

The signatory will export the public key (SVD)

The signatory will have to present his PIN (VAD) before being allowed to create signature.

The end of life environment is corresponding to the physical destruction of the card.

2.3 THE ACTORS AND ROLES

The actors can be divided in:

Developers

The IC designer and Dedicated Software (DS) developer designs the chip and its DS. For this TOE, it is SAMSUNG.

The Embedded Software developer designs the OS according to IC/DS specifications, the CIE/CNS application and the softmask if necessary. For this TOE, it is GEMALTO.

Manufacturers

The IC manufacturer -or founder- designs the photomask, manufactures the IC with its DS and hardmask from the Product Developer. For this TOE, the founder is SAMSUNG.

The IC die bonding manufacturer is responsible for the die bonding the ICs provided by the founder. For this TOE, the IC die bonding manufacturer is GEMALTO.

The Smart Card product manufacturer (or Card manufacturer) is responsible to obtain a pre-personalized card from a packaged IC. In the phase 5, the card manufacturer is also responsible for loading additional code belonging to the Developer and Manufacturer of the Card (the softmask) if necessary. For this TOE, the Smart Card product manufacturer is GEMALTO.

Personalizer

SECURITY TARGET
TOE CIE/CNS

The Smart Card Personalizer personalizes the card by loading the cardholder data as well as cryptographic keys and PINs. The Personalizer may also load card issuer applets during this phase. For this TOE, the personalizer may be GEMALTO or the Card Issuer.

At the end of this phase, no more applets may be loaded on the card (post-issuance is not allowed). The card is issued in OP_SECURED state.

Card Issuer, Administrator

The Card Issuer -short named "issuer"- is a National Administration (or Identity Cards Authority). It issues cards to the citizens who are the "Card holders". The Card Issuer has also the role of Administrator. Therefore, the Card Issuer is responsible for selecting and managing the personalization, for managing applets (load, install and delete), for creating the Signatory's PIN, for optionally importing the first SCD into the TOE, as well as for distribution and invalidation of the card.

End-user, Signatory

The Signatory is the End-user in the usage phase (phase 7) and owns the TOE. The card is personalized with his or her identification and secrets. The Signatory can sign, destroy the SCD and generate a new SCD/SVD pair.

The roles (administration and usage) are defined in the following tables.

Phase	Administrator	Environment
6 and 7	Card Issuer	Personalization and Usage Environment

Phase	User	Environment
7	Signatory	Usage Environment

During the delivery between phases the responsibility is transferred from the current phase administrator to the next phase administrator.

2.4 TOE INTENDED USAGE

SCD import:

1. The SCA authenticates itself to the TOE.
2. The signatory authenticates to the TOE (see above).
3. The signatory requests the import of SCD from a SSCD Type 1 device.
4. The SCD is imported to the TOE.
5. The CGA generates the certificate for the corresponding SVD and sends it to the TOE.

SCD/SVD Key generation in the final usage phase,

1. The SCA authenticates itself to the TOE.
2. The signatory enters his PIN code.
3. The signatory requests the generation of a SCD / SVD key pair
4. The SCD / SVD are generated in the TOE.
5. The SVD is sent to the CGA.
6. The CGA generates the certificate and sends it to the TOE.

SECURITY TARGET
TOE CIE/CNS

Signature Creation in the final usage phase,

1. The SCA authenticates itself to the TOE.
2. The signatory enters his PIN code.
3. The signatory sends the DTBS to the TOE.
4. The TOE computes the Signature.
5. The TOE sends the Signature to the SCA.

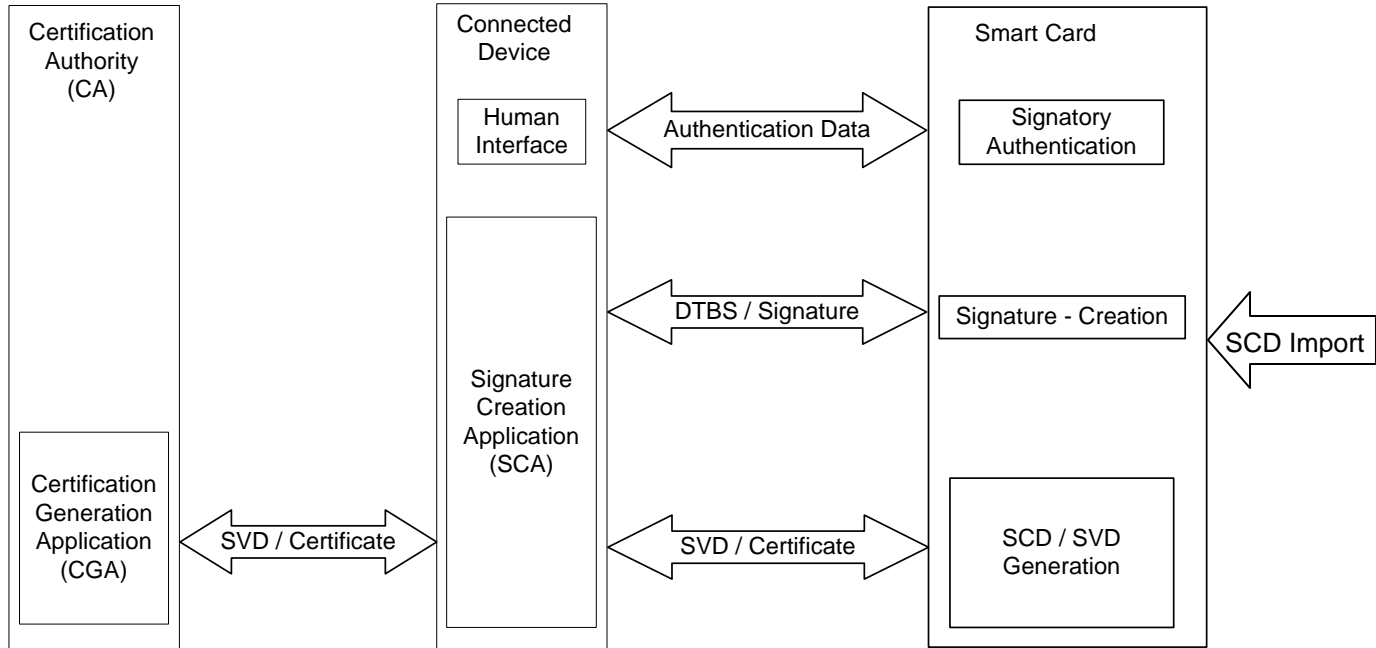


Figure 4 - TOE Usage

3 CONFORMANCE CLAIMS

3.1 CC CONFORMANCE CLAIM

This Security Target is built with CC V2.3

This ST is conformant with [CCPART2] extended.

This ST is conformant with [CCPART3] augmented.

The TOE includes an Integrated Circuit certified with CC V2.3 EAL4+ ADV_IMP.2, ALC_DVS.2, AVA_MSU.3, AVA_VLA.4. This IC has its own ST [IC-ST]. The assets, threats, objectives, SFR and security functions specific to the IC are describe in [IC-ST].and are not repeatable in the current ST.

It is a composite evaluation.

3.2 PP CLAIM, PACKAGE CLAIM

This ST is compliant to [PP SSCD2] and [PP SSCD3].

The [IC-ST] refines the assets, threats, objectives and SFR of [PP/BSI-0002].

This TOE is CC v2.3 EAL4 augmented (+) with:

- ADV_IMP.2: Complete mapping of the implementation representation of the TSF,
- ALC_DVS.2: Sufficiency of security measures.
- AVA_MSU.3: Analysis and testing for insecure states
- AVA_VLA.4: Highly resistant

The strength level for the TOE security functional requirements is “SOF high” (Strength Of Functions high).

3.3 CONFORMANCE RATIONALE

This Security Target is built with CC V2.3 as referenced in External references.

This ST is conformant with [CCPART2] extended due to additional components as stated in Protection Profile [PP SSCD2], [PP SSCD3] and [PP/BSI-0002].

This ST is conformant with [CCPART3] augmented due to augmentation given in [PP SSCD2], [PP SSCD3] and [PP/BSI-0002].

The [IC-ST] refines the assets, threats, objectives and SFR of [PP/BSI-0002] see BSI certificate and certification report.

The current ST refines the assets, threats, objectives and SFR of [PP SSCD2], [PP SSCD3] and [BSI PP].

3.4 PP REFERENCE

The PP [PP SSCD2], [PP SSCD3] and [PP/BSI-0002] are claimed.

3.5 PP REFINEMENTS

Refinements of [PP/BSI-0002] are described in [IC-ST] and are not repeated here.

The table below shows the functional requirements refined in PP and in ST.

SECURITY TARGET
TOE CIE/CNS

Functional requirement	Refined in [PP SSCD2]	Refined in [PP SSCD3]	Refined in ST
FCS_CKM.1		–	X
FCS_CKM.4	–	–	X
FCS_COP.1	X	X	X
FDP_ACC.1	X	X	(X)
FDP_ACF.1	X	X	X
FDP_ETC.1	X	X	(X)
FDP_ITC.1	X	X	(X)
FDP_RIP.1	X	X	(X)
FDP_SDI.2	X	X	(X)
FDP_UCT.1	X		(X)
FDP_UIT.1	X	X	(X)
FIA_AFL.1	X	X	X
FIA_ATD.1	X	X	(X)
FIA_UAU.1	X	X	X
FIA_UID.1	X	X	X
FMT_MOF.1	X	X	(X)
FMT_MSA.1	X	X	(X)
FMT_MSA.2	NA	NA	NA
FMT_MSA.3	X	X	(X)
FMT_MTD.1	X	X	(X)
FMT_SMF.1			X
FMT_SMR.1	X	X	(X)
FPT_AMT.1	–	–	X
FPT_EMSEC.1	–	–	X
FPT_FLS.1	–	–	X
FPT_PHP.1	NA	NA	NA
FPT_PHP.3	–	–	X
FPT_TST.1	–	–	X
FTP_ITC.1	X	X	(X)
FTP_TRP.1	X	X	X

Table 4. PP functional requirements that have been refined

The functional requirements are both refined in the claimed PP and in this ST. This section demonstrates the compatibility of the refinements done in both documents.

-: No refinement

SECURITY TARGET
TOE CIE/CNS

(X): no additional refinement has been made in the ST.

X: Refinement

NA: the functional requirement requires no refinement.

FCS_CKM.1: Cryptographic key generation

This functional requirement has been refined from [PP SSCD3] with a specific list of approved algorithms that gives the cryptographic key generation algorithms and key sizes used by the TOE.

FCS_CKM.4: Cryptographic key destruction

This functional requirement is refined from [PP SSCD2] and [PP SSCD3] with a description of the key destruction method used that follows [no specific standard].

FCS_COP.1: Cryptographic operation

This functional requirement partially refined in [PP SSCD2] and [PP SSCD3] has been completed in the ST with a specific list of cryptographic algorithms and key sizes that are used by the TOE. Furthermore, two iterations have been added, one for Hashing and one for the MAC computation.

FDP_ACC.1: Subset access control

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FDP_ACF.1: Security based access control functions

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3]. Additional refinement is done in the ST.

FDP_ETC.1: Export of user data without security attributes

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FDP_ITC.1: Import of user data without security attributes

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FDP_RIP.1: Subset residual information protection

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FDP_SDI.2: Stored data integrity monitoring and action

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FDP_UCT.1 Basic data exchange confidentiality

This functional requirement is already refined in [PP SSCD2] and no other refinement has been added in the ST.

FDP_UIT.1: Data exchange integrity

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FIA_AFL.1: Basic authentication failure handling

This functional requirement is partially refined in [PP SSCD2] and [PP SSCD3]. In the ST the number of authentication failures has been refined.

FIA_ATD.1: User attribute definition

SECURITY TARGET
TOE CIE/CNS

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FIA_UAU.1: Timing of authentication

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3]. Additional refinement is done in the ST.

FIA_UID.1: Timing of identification

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3]. Additional refinement is done in the ST.

FMT_MOF.1: Management of security functions behavior

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FMT_MSA.1: Management of security attributes

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FMT_MSA.2: Secure security attributes

There is no refinement required for this security requirement.

FMT_MSA.3: Static attributes initialization

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FMT_MTD.1: Management of TSF data

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FMT_SMF.1: Specification of Management

This functional requirement is added to [PP SSCD2] and [PP SSCD3] in order to fulfill dependencies of CC.

FMT_SMR.1: Security roles

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FPT_AMT.1: Abstract machine testing

This functional requirement is not refined in [PP SSCD2] and [PP SSCD3] and is entirely refined in the ST.

FPT_EMSEC.1: TOE emanation

This functional requirement, extended from CC is not refined in [PP SSCD2] and [PP SSCD3]. It is entirely refined in the ST.

FPT_FLS.1: Failure with preservation of secure state

This functional requirement is not refined in [PP SSCD2] and [PP SSCD3] and is entirely refined in the ST.

FPT_PHP.1: Passive detection of physical attacks

There is no refinement required for this security requirement.

FPT_PHP.3: Resistance to physical attack

This functional requirement is not refined in [PP SSCD2] and [PP SSCD3] and is entirely refined in the ST.

SECURITY TARGET
TOE CIE/CNS

FPT_TST.1: Testing

This functional requirement is not refined in [PP SSCD2] and [PP SSCD3] and is entirely refined in the ST.

FTP_ITC.1: Inter-TSF trusted channel

This functional requirement is already refined in [PP SSCD2] and [PP SSCD3] and no other refinement has been added in the ST.

FTP_TRP.1: Trusted path

This functional requirement is partly refined in [PP SSCD2] and [PP SSCD3]. Additional refinement is done in the ST.

3.6 PP ADDITIONS

The table below shows the functional requirements refined in PP and in ST.

	Addition in ST
Assets	-
Threats	-
Assumptions	X
Organizational Security Policies	X
Security objectives for the TOE	-
Security objectives for the operational environment	X
Security functional requirements	X
security assurance requirements	-
Security Requirements for the IT Environment	-

3.7 ASSURANCE REQUIREMENTS ADDITIONAL TO THE PP

There is no assurance requirement, which is not in [PP SSCD2], [PP SSCD3] or [PP/BSI-0002].

SECURITY TARGET
TOE CIE/CNS

4 TOE SECURITY ENVIRONMENT

This section describes the security aspects of the TOE environment and addresses the description of the assets to be protected, the threats, the organizational security policies and the assumptions.

4.1 DIGITAL SIGNATURE ASSETS

The assets of the TOE are those defined in [PP SSCD2], [PP SSCD3] and [PP/BSI-0002].

This Security Target deals with the assets of [PP SSCD2] and [PP SSCD3]. The assets of [PP/BSI-0002] are studied in [IC-ST]. The assets of the platform are defined in [ST_PLTF_ADRIATIC].

D.SCD	SCD: private key used to perform an electronic signature operation (confidentiality of the SCD must be maintained).
D.SVD	SVD: public key linked to the SCD and used to perform electronic signature verification (integrity of the SVD when it is exported must be maintained).
D.DTBS	DTBS and DTBS-representation: set of data or its representation which is intended to be signed (their integrity must be maintained)
D.VAD	VAD: PIN code data entered by the End User to perform a signature operation (confidentiality and authenticity of the VAD as needed by the authentication method employed)
D.RAD	RAD: Reference PIN code authentication reference used to identify and authenticate the End User (Integrity and confidentiality of RAD must be maintained)
D.SSCD	Signature-creation function of the SSCD using the SCD: (The quality of the function must be maintained so that it can participate to the legal validity of electronic signatures)
D.SIG	Electronic signature: (enforceability of electronic signatures must be assured).

4.2 DIGITAL SIGNATURE SUBJECTS

S.User	End user of the TOE which can be identified as S.Admin or S.Signatory.
S.Admin	User who is in charge to perform the TOE initialization, TOE personalization or other TOE administrative functions.
S.Signatory	User who holds the TOE and uses it on his own behalf or on behalf of the natural or legal person or entity he represents.
S.OFFCARD	Attacker. A human or process acting on his behalf being located outside the TOE. The main goal of the S.OFFCARD attacker is to access Application sensitive information. The attacker has a high level potential attack and knows no secret.

4.3 DIGITAL SIGNATURE THREATS

T.Hack_Phys	<i>Physical attacks through the TOE interfaces.</i>
--------------------	---

SECURITY TARGET
TOE CIE/CNS

	An attacker S.OFFCARD interacts with the TOE interfaces to exploit vulnerabilities to gain fraudulent access to the Assets .
T.SCD_Divulg	<i>Storing, copying, and releasing of signature-creation D.SCD.</i> An attacker S.OFFCARD can store, copy the SCDD.SCD outside the TOE. An attacker S.OFFCARD can release the SCD D.SCD during generation, storage and use for signature-creation in the TOE.
T.SCD_Derive	<i>Derive the signature-creation data D.SCD.</i> An attacker S.OFFCARD derives the SCD D.SCD from public known data, such as SVD corresponding to the SCD or signatures created by means of the SCD or any other data communicated outside the TOE, which is a threat against the secrecy of the SCD .
T.Sig_Forgery	<i>Forgery of electronic signature D.SIG.</i> An attacker S.OFFCARD forges the signed data object maybe together with its electronic signature created by the TOE and the violation of the integrity of the signed data object is not detectable by the signatory or by third parties. The signature generated by the TOE is subject to deliberate attacks by experts possessing a high attack potential with advanced knowledge of security principles and concepts employed by the TOE.
T.Sig_Repud	<i>Repudiation of signatures D.SIG.</i> If an attacker S.OFFCARD can successfully threaten any of the assets, then the non repudiation of the electronic signature is compromised. The signatory is able to deny having signed data using the SCD in the TOE under his control even if the signature is successfully verified with the SVD contained in his un-revoked certificate.
T.SVD_Forgery	<i>Forgery of the signature- verification data D.SVD.</i> An attacker S.OFFCARD forges the SVD D.SVD presented by the TOE. This result in loss of SVD integrity in the certificate of the signatory.
T.DTBS_Forgery	<i>Forgery of the DTBS-representation D.DTBS.</i> An attacker S.OFFCARD modifies the DTBS-representation D.DTBS . sent by the SCA . Thus the DTBS-representation used by the TOE for signing does not match the DTBS the signatory intends to sign.
T.SigF_Misuse	<i>Misuse of the Signature-Creation function of the TOE</i> An attacker S.OFFCARD misuses the signature-creation function of the TOE to create SDO for data the signatory has not decided to sign. The TOE is subject to deliberate attacks by experts possessing a high attack potential with advanced knowledge of security principles and concepts employed by the TOE.

4.4 DIGITAL SIGNATURE ASSUMPTIONS

This section defines assumptions related to the Digital Signature application as stated in PP SSCD and as stated in [PP/BSI-0002] for composite evaluation.

A.CGA	<i>Trustworthy certification-generation application</i>
--------------	---

SECURITY TARGET
TOE CIE/CNS

	The CGA protects the authenticity of the signatory's name and the SVD in the qualified certificate by an advanced signature of the CSP.
A.SCA	<i>Trustworthy signature-creation application</i> The signatory uses only a trustworthy SCA. The SCA generates and sends the DTBS-representation of data the signatory wishes to sign in a form appropriate for signing by the TOE.
A.SCD_Generate (type2)	<i>Trustworthy SCD/SVD generation.</i> If a party other than the signatory generates the SCD/SVD-pair of a signatory, then (a) this party will use a SSCD for SCD/SVD-generation, (b) confidentiality of the SCD will be guaranteed until the SCD is under the sole control of the signatory and (c) the SCD will not be used for signature-creation until the SCD is under the sole control of the signatory. (d) The generation of the SCD/SVD is invoked by authorised users only (e) The SSCD Type1 ensures the authenticity of the SVD it has created and exported.
A.Key_Mngt (additional assumption)	<i>Secure Key Management</i> The IT Environment SCA and CGA shall protect the confidentiality of the keys used for the secure communications with the TOE. These are assumptions additional to [PP SSCD2] and [PP SSCD3].

4.5 ORGANIZATIONAL SECURITY POLICIES

This section defines OSPs related to the Digital Signature application as stated in PP SSCD3.

P.CSP_Qcert	<i>Qualified certificate.</i> The CSP uses a trustworthy CGA to generate the qualified certificate for the SVD generated by the SSCD. The qualified certificates contains at least the elements defined in Annex I of the Directive [DIRECTIVE], i.e., inter alias the name of the signatory and the SVD matching the SCD implemented in the TOE under sole control of the signatory. The CSP ensures that the use of the TOE is evident with signatures through the certificate or other publicly available information.
P.Qsign	<i>Qualified electronic signatures.</i> The signatory uses a signature-creation system to sign data with qualified electronic signatures. The DTBS are presented to the signatory by the SCA. The qualified electronic signature is based on a qualified certificate and is created by a SSCD.
P.Sigy_SSCD	<i>TOE as secure signature-creation device.</i> The TOE stores the SCD used for signature creation under sole control of the signatory. The SCD used for signature generation can practically occur only once.

SECURITY TARGET
TOE CIE/CNS

P.IC_Usage (additional OSP)	The Smartcard Embedded Software developers follow the IC guidance documents given by the IC manufacturer.
P.IC_Protection (additional OSP)	All employees follows the security requirements for the materials and documentations given by the IC manufacturer .

5 SECURITY OBJECTIVES

The security objectives in this Security Target are those named and described in [PP SSCD2] and [PP SSCD3].

They cover the following aspects:

- The security objectives for the TOE,
- The security objectives for the environment.

The security objectives stated in [PP/BSI-0002] can be found in [IC ST].

5.1 SECURITY OBJECTIVES FOR THE TOE

OT.EMSEC_Design	<i>Provide physical emanations security</i> Design and build the TOE in such a way as to control the production of intelligible emanations within specified limits.
OT.Lifecycle_Security	<i>Lifecycle security.</i> The TOE shall detect flaws during the initialization, personalization and operational usage. The TOE shall provide safe destruction techniques for the SCD in case of re-generation or re-import.
OT.SCD_Secrecy	<i>Secrecy of the signature-creation data.</i> The secrecy of the SCD (used for signature generation) is reasonably assured against attacks with a high attack potential.
OT.SCD_SVD_Corresp	<i>Correspondence between SVD and SCD.</i> The TOE shall ensure the correspondence between the SVD and the SCD. The TOE shall verify on demand the correspondence between the SCD stored in the TOE and the SVD if it has been sent to the TOE.
OT.SVD_Auth_TOE	<i>TOE ensures authenticity of SVD.</i> The TOE provides means to enable the CGA to verify the authenticity SVD that has been exported by that TOE.
OT.Tamper_ID	<i>Tamper detection.</i> The TOE shall provide system features that detect physical tampering of a system component, and use those features to limit security breaches.
OT.Tamper_Resistance	<i>Tamper resistance.</i> The TOE shall prevent or resist physical tampering with specified system devices and components.
OT.Init (type 3)	<i>Secure SCD SVD generation.</i> The TOE provides security features to ensure that the generation of the

SECURITY TARGET

TOE CIE/CNS

	SCD and the SVD is invoked by authorized users only.
OT.SCD_Unique (type 3)	<p><i>Uniqueness of the signature-creation data</i></p> <p>The TOE shall ensure the cryptographic quality of the SCD/ SVD pair for the qualified electronic signature. The SCD used for signature generation can practically occur only once and cannot be reconstructed from the SVD. In that context 'practically occur once' means that the probability of equal SCDs is negligible low.</p>
OT.SCD_Transfer (Type 2)	<p><i>Secure transfer of SCD between SSCD.</i></p> <p>The TOE shall ensure the confidentiality of the SCD transferred between SSCDs.</p>
OT.DTBS_Integrity_TOE	<p><i>Verification of the DTBS-representation integrity</i></p> <p>The TOE shall verify that the DTBS-representation received from the SCA has not been altered in transit between the SCA and the TOE. The TOE itself shall ensure that the DTBS-representation is not altered by the TOE as well. Note, that this does not conflict with the signature-creation process where the DTBS itself could be hashed by the TOE.</p>
OT.Sigy_SigF	<p><i>Signature generation function for the legitimate signatory only.</i></p> <p>The TOE provides the signature generation function for the legitimate signatory only and protects SCD against the use of others. The TOE shall resist attacks with high attack potential.</p>
OT.Sig_Secure	<p><i>Cryptographic security of the electronic signature</i></p> <p>The TOE generates electronic signatures that cannot be forged without knowledge of the SCD through robust encryption techniques. The SCD cannot be reconstructed using the electronic signatures. The electronic signatures shall be resistant against these attacks, even when executed with a high attack potential.</p>

5.2 SECURITY OBJECTIVES FOR THE OPERATIONAL ENVIRONMENT

This section describes the security objectives for the environment.

The IT environment of the TOE is composed of the Certification Generation Application (CGA) and the Signature Creation Application (SCA).

Security Objectives	Description
OE.SCD_SVD_Corresp (type 2)	<p><i>Correspondence between SVD and SCD</i></p> <p>The SSCD Type1 shall ensure the correspondence between the SVD and the SCD. The SSVD Type1 shall prove the correspondence between the SCD sent to the TOE and the SVD sent to the CGA or TOE.</p>
OE.SCD_Transfer (type 2)	<p><i>Secure transfer of SCD between SSCD</i></p> <p>The SSCD Type1 shall ensure the confidentiality of the SCD transferred to the TOE. The SSCD Type1 shall prevent the export of a SCD that already has been used for signature generation by the SSCD Type1. The SCD shall be deleted from the SSCD Type1 whenever it is exported into the TOE.</p>
OE.SCD_Unique (type 2)	<p><i>Uniqueness of the signature-creation data</i></p> <p>The SSCD Type1 shall ensure the cryptographic quality of the SCD/SVD pair</p>

SECURITY TARGET
TOE CIE/CNS

	for the qualified electronic signature. The SCD used for signature generation can practically occur only once and cannot be reconstructed from the SVD. In that context 'practically occur once' means that the probability of equal SCDs is negligible low.
OE.CGA_Qcert	<i>Generation of qualified certificates</i> The CGA generates qualified certificates which include inter alias the name of the signatory controlling the TOE, the SVD matching the SCD implemented in the TOE under sole control of the signatory, the advanced signature of the CSP.
OE.SVD_AUTH_CGA	<i>CGA verifies the authenticity of the SVD</i> The CGA verifies that the SSCD is the sender of the received SVD and the integrity of the received SVD. The CGA verifies the correspondence between the SCD in the SSCD of the signatory and the SVD in the qualified certificate.
OE.HI_VAD	<i>Protection of the VAD</i> If an external device provides the human interface for user authentication, this device will ensure confidentiality and integrity of the VAD as needed by the authentication method employed.
OE.SCA_Data_Intend	<i>Data intended to be signed</i> The SCA (a) generates the DTBS-representation of the data that has been presented as DTBS and which the signatory intends to sign in a form which is appropriate for signing by the TOE, (b) sends the DTBS-representation to the TOE and enables verification of the integrity of DTBS-representation by the TOE, (c) attaches the signature produced by the TOE to the data or provides it separately .
OE.Key_Mngt	<i>Secure management of the keys</i> The IT Environment SCA and CGA protect the confidentiality of the keys used for the secure communications with the TOE.
OE.IC_Usage_and_Protection	The user guidance of the hardware (data-sheet...) are followed by the software developer. Gemalto people shall follow Security measures to ensure the confidentiality and the Integrity of the IC (material & documentations) after delivery by the IC manufacturer.

6 SECURITY REQUIREMENTS

6.1 TOE SECURITY FUNCTIONAL REQUIREMENTS

This chapter defines the security functional requirements for the TOE using functional requirements components as specified in [PP SSCD2] and [PP SSCD3].

[IC ST] deals with the security functional requirements of [PP/BSI-0002].

The security functions requirements provided by the platform are described in [ST_PLTF_ADRIATIC].

6.1.1 Security functional requirements list

Identification	DESCRIPTION
----------------	-------------

SECURITY TARGET
TOE CIE/CNS

FCS	Cryptographic support
FCS_CKM.1	Cryptographic key generation
FCS_CKM.4	Cryptographic key destruction
FCS_COP.1	Cryptographic operation
FDP	User data protection
FDP_ACC.1	Subset Access control
FDP_ACF.1	Security attributes based access control
FDP_ETC.1	Export of user data without security attributes
FDP_ITC.1	Import of User Data without security attributes
FDP_RIP.1	Subset residual information protection
FDP_SDI.2	Stored data integrity monitoring and action
FDP_UCT.1	Basic data exchange confidentiality
FDP_UIT.1	Basic data exchange integrity
FIA	Identification and Authentication
FIA_AFL.1	Authentication failure handling
FIA_ATD.1	User attribute definition
FIA_UAU.1	Timing of authentication
FIA_UID.1	Timing of identification
FMT	Security management
FMT_MOF.1	Management of security function behavior
FMT_MSA.1	Management of security attributes
FMT_MSA.2	Secure security attributes
FMT_MSA.3	Static attribute initialization
FMT_MTD.1	Management of TSF data
FMT_SMF.1	Specification of management functions
FMT_SMR.1	Security roles
FPT	Protection of the TOE Security function
FPT_AMT.1	Abstract machine testing
FPT_EMSEC.1	TOE Emanation
FPT_FLS.1	Failure with preservation of secure state
FPT_PHP.1	Passive detection of physical attack
FPT_PHP.3	Resistance to physical attack
FPT_TST.1	TSF testing
FTP	Trusted path/Channel
FTP_ITC.1	Inter-TSF trusted channel
FTP_TRP.1	TOE Trusted path

Table 5. IAS Classic security functional requirements list

6.1.2 FCS – Cryptographic support

6.1.2.1 FCS_CKM cryptographic key management

FCS_CKM.1 Cryptographic key generation

FCS_CKM.1/SCD

FCS_CKM.1/SCD The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [**RSA key generation**] and specified cryptographic key sizes [**1024 bits or 1536 bits**] that meet the following: [**no standard**].

Application note: Type 3 only.

Remark: Link with Initialization SFP.

FCS_CKM.4 Cryptographic key destruction

FCS_CKM.4/SCD

FCS_CKM.4.1/SCD The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method [**Delete BSO command used**] that meets the following: [**no standard**].

Application note (refined):

The cryptographic key SCD will be destroyed on demand of the Signatory.

The destruction of the SCD is mandatory before the SCD/SVD pair is re-imported into the TOE.(Type 2)

The destruction of the SCD is mandatory before the SCD/SVD pair is re-generated by the TOE.(Type 3)

Remark: Link with SCD destruction SFP.

6.1.2.2 FCS_COP Cryptographic operation

FCS_COP.1 Cryptographic operation

FCS_COP.1/CORRESP

**FCS_COP.1.1/
CORRESP** The TSF shall perform [**SCD / SVD correspondence proof**] in accordance with a specified cryptographic algorithm [**RSA key generation**] and cryptographic key sizes [**1024 bits or 1536 bits**] that meet the following: [**no standard**].

Application note:

When the key pair is generated on card, the key generation process ensures that the public key corresponds to the private key.(Link with Initialization SFR)

When the SCD is input in the card, the card does not manage the SVD. The SVD or the corresponding certificate can be input in a standard file for future use by the application. But the card does not even know the content of the file. (Link with SVD transfer SFP)

FCS_COP.1/SIGNING

FCS_COP.1.1/ The TSF shall perform [**Digital signature-generation**] in accordance with a

SECURITY TARGET
TOE CIE/CNS

SIGNING specified cryptographic algorithm [RSA_SHA_PKCS#1] and cryptographic key sizes [1024 bits or 1536 bits] that meet the following: [RSA PKCS #1].

Remark : Link with Signature creation SFP

6.1.3 FDP: User data protection

6.1.3.1 FDP_ACC Access Control policy

FDP_ACC.1 Subset access control

FDP_ACC.1/Initialization SFP

FDP_ACC.1.1/ Initialization SFP The TSF shall enforce the [Initialization SFP] on [Generation of SCD/SVD pair by User].

Application note: Type 3 only.

FDP_ACC.1/SVD Transfer SFP

FDP_ACC.1.1/ Transfer SFP **SVD** The TSF shall enforce the [SVD Transfer SFP] on [export of SVD by User].

Application note:

When SCD is imported into the TOE, FDP_ACC.1/SVD Transfer SFP will be required only, if the TOE is to import the SVD from a SSCD Type1 so it will be exported to the CGA for certification. This is not the case in this TOE. (Type 2)

When SCD is generated in the TOE, FDP_ACC.1/SVD Transfer SFP will be required to export the SVD to the CGA for certification. (Type 3).

FDP_ACC.1/SCD Import SFP

FDP_ACC.1.1/ Import SFP **SCD** The TSF shall enforce the [SCD Import SFP] on [Import of SCD by User].

Application note: Type 2 only.

FDP_ACC.1/Personalization SFP

FDP_ACC.1.1/ Personalization SFP The TSF shall enforce the [Personalization SFP] on [Creation of RAD by Administrator].

FDP_ACC.1/Signature-creation SFP

FDP_ACC.1.1/ Signature-creation SFP The TSF shall enforce the [Signature-creation SFP] on [Sending of DTBS-representation by SCA] and [Signing of DTBS-representation by Signatory].

6.1.3.2 FDP_ACF access control function

SECURITY TARGET

TOE CIE/CNS

FDP_ACF.1 Security attributes based access control

The security attributes for the subjects, TOE components and related status are:

Groups of security attributes [USER, SUBJECT OR OBJECT THE ATTRIBUTE IS ASSOCIATED WITH]	ATTRIBUTES	ATTRIBUTES STATUS
GENERAL ATTRIBUTE GROUP		
[User]	ROLE	ADMINISTRATOR, SIGNATORY
INITIALIZATION ATTRIBUTE GROUP		
[USER]	SCD/SVD MANAGEMENT	AUTHORIZED / NOT AUTHORIZED
[SCD]	SECURE SCD IMPORT ALLOWED	No/YES
SIGNATURE-CREATION ATTRIBUTE GROUP		
[SCD]	SCD OPERATIONAL	No/YES
[DTBS]	SENT BY AN AUTHORIZED SCA	No/YES

Refinement:

The rules for specific functions that implement access control SFP defined in FDP_ACC.1 are the following:

FDP_ACF.1/Initialization SFP

FDP_ACF.1.1/ Initialization SFP The TSF shall enforce the [**Initialization SFP**] to objects based on [**General attribute group**] and [**Initialization attribute group**].

FDP_ACF.1.2/ Initialization SFP The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:

The user with the security attribute "role" set to "Administrator" or set to "Signatory" and with the security attribute "SCD / SVD management" set to "authorized" is allowed to generate SCD/SVD pair.

FDP_ACF.1.3/ Initialization SFP The TSF shall explicitly authorize access of subjects to objects based on the following additional rules: [**none**]

FDP_ACF.1.4/ Initialization SFP The TSF shall explicitly deny access of subjects to objects based on the rule:
The user with the security attribute "role" set to "Administrator" or set to "Signatory" and with the security attribute "SCD / SVD management" set to "not authorized" is not allowed to generate SCD/SVD pair.

Application note: Type 3 only.

FDP_ACF.1/SVD Transfer SFP

FDP_ACF.1.1/ SVD Transfer SFP The TSF shall enforce the [**SVD Transfer SFP**] to objects based on [**General attribute group**]

FDP_ACF.1.2/ SVD Transfer SFP The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:

The user with the security attribute "role" set to "Administrator" or to "Signatory" is allowed to export SVD.

FDP_ACF.1.3/ SVD Transfer SFP The TSF shall explicitly authorize access of subjects to objects based on the following additional rules [**none**].

FDP_ACF.1.4/ The TSF shall explicitly deny access of subjects to objects based on the rule:

SECURITY TARGET

TOE CIE/CNS

SVD Transfer SFP [none].

Application note:

FDP_ACF.1/SVD Transfer SFP will be required only, if the TOE holds the SVD and the SVD is exported to the CGA for certification.

FDP_ACF.1/SCD Import SFP

FDP_ACF.1.1/ Import SFP **SCD** The TSF shall enforce the [**SCD Import SFP**] to objects based on [**General attribute group**] and [**Initialization attribute group**].

FDP_ACF.1.2/ SCD Import SFP The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:
The user with the security attribute "role" set to "Administrator" or to "Signatory" and with the security attribute "SCD / SVD management" set to "authorized" is allowed to import SCD if the security attribute "secure SCD import allowed" is set to "yes".

FDP_ACF.1.3/ Import SFP **SCD** The TSF shall explicitly Authorize access of subjects to objects based on the following additional rules [none].

FDP_ACF.1.4/ Import SFP **SCD** The TSF shall explicitly deny access of subjects to objects based on the rule:
The user with the security attribute "role" set to "Administrator" or to "Signatory" and with the security attribute "SCD / SVD management" set to "not authorized" is not allowed to import SCD if the security attribute "secure SCD import allowed" is set to "yes".

The user with the security attribute "role" set to "Administrator" or to "Signatory" and with the security attribute "SCD / SVD management" set to "authorized" is not allowed to import SCD if the security attribute "secure SCD import allowed" is set to "no".

Application note: Type 2 only.

FDP_ACF.1/Personalization SFP

FDP_ACF.1.1/ Personalization SFP The TSF shall enforce the [**Personalization SFP**] to objects based on [**General attribute group**]

FDP_ACF.1.2/ Personalization SFP The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:
User with the security attribute "role" set to "Administrator" is allowed to create the RAD.

FDP_ACF.1.3/ Personalization SFP The TSF shall explicitly authorize access of subjects to objects based on the following additional rules [**none**].

FDP_ACF.1.4/ Personalization SFP The TSF shall explicitly deny access of subjects to objects based on the rule: [**none**].

FDP_ACF.1/Signature Creation SFP

FDP_ACF.1.1/ Signature-creation SFP The TSF shall enforce the [**Signature-creation SFP**] to objects based on [**General attribute group**] and [**Signature-creation attribute group**].

FDP_ACF.1.2/ Signature-creation SFP The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:
User with the security attribute "role" set to "Signatory" is allowed to create electronic signatures for DTBS sent by an authorized SCA with SCD by the Signatory which security attribute "SCD operational" is set to "yes".

SECURITY TARGET

TOE CIE/CNS

FDP_ACF.1.3/ Signature-creation SFP The TSF shall explicitly authorize access of subjects to objects based on the following additional rules: [**none**].

FDP_ACF.1.4/ Signature-creation SFP The TSF shall explicitly deny access of subjects to objects based on the rule:
User with the security attribute "role" set to "Signatory" is not allowed to create electronic signatures for DTBS which is not sent by an authorized SCA with SCD by the Signatory which security attribute "SCD operational" is set to "yes".
User with the security attribute "role" set to "Signatory" is not allowed to create electronic signatures for DTBS sent by an authorized SCA with SCD by the Signatory which security attribute "SCD operational" is set to "no".

6.1.3.3 FDP_ETC :Export to outside TSF control

FDP_ETC.1: Export of user data without security attributes

FDP_ETC.1/ SVD Transfer

FDP_ETC.1.1/ Transfer SVD The TSF shall enforce the [**SVD Transfer SFP**] when exporting user data, controlled under the SFP(s), outside of the TSC.

FDP_ETC.1.2/ Transfer SVD The TSF shall export the user data without the user data's associated security attributes.

Application note:

FDP_ETC.1/SVD Transfer SFP will be required only, if the TOE holds the SVD and the SVD is exported to the CGA for certification.

6.1.3.4 FDP_ITC Import From outside TSF control

FDP_ITC.1: Import of user data without security attributes

FDP_ITC.1/SCD

FDP_ITC.1.1/SCD The TSF shall enforce the [**SCD Import SFP**] when importing user data, controlled under the SFP, from outside of the TSC.

FDP_ITC.1.2/SCD The TSF shall ignore any security attributes associated with the user data when imported from outside the TSC.

FDP_ITC.1.3/SCD The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TSC: [**SCD shall be sent by an Authorized SSCD**].

Application note:

A SSCD of Type 1 is authorised to send SCD to a SSCD of Type 2, if it is designated to generate the SCD for this SSCD of Type 2 and to export the SCD for import into this SSCD of Type 2. Authorised SSCD of Type 1 are able to establish a trusted channel to the SSCD of Type 2 for SCD transfer as required by FDP_ITC.1.3/SCD export.

Type 2 only.

Remark: Link with trusted channel SFP.

FDP_ITC.1/DTBS

FDP_ITC.1.1/DTBS The TSF shall enforce the [**Signature-creation SFP**] when importing user data, controlled under the SFP, from outside of the TSC.

SECURITY TARGET
TOE CIE/CNS

FDP_ITC.1.2/DTBS The TSF shall ignore any security attributes associated with the user data when imported from outside the TSC.

FDP_ITC.1.3/DTBS The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TSC: **[DTBS-representation shall be sent by an Authorized SCA].**

Application note:

A SCA is authorised to send the DTBS-representation if it is actually used by the Signatory to create an electronic signature and able to establish a trusted channel to the SSCD as required by FDP_ITC.1.3/SCA DTBS.

Remark: Link with trusted channel and authenticate SFP.

6.1.3.5 FDP RIP Residual information protection

FDP_RIP.1: Subset residual information protection

FDP_RIP.1.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the **[de-allocation of the resource from]** the following objects: **[SCD, VAD, and RAD].**

Remark: Link with SCD destruction SFP.

6.1.3.6 FDP SDI Stored data integrity

FDP_SDI.2 Stored data integrity monitoring and action

FDP_SDI.2/Persistent

The following data persistently stored by TOE have the user data attribute “integrity checked persistent stored data”

1. SCD
2. RAD
3. SVD (if persistently stored by TOE)

FDP_SDI.2.1/ Persistent The TSF shall monitor user data stored within the TSC for **[integrity error]** on all objects, based on the following attributes: **[integrity checked persistent stored data].**

FDP_SDI.2.2/ Persistent Upon detection of a data integrity error, the TSF shall:
[1. prohibit the use of the altered data
2. inform the Signatory about integrity error.]

FDP_SDI.2/DTBS

The DTBS representation temporarily stored by TOE has the user data attribute “integrity checked stored data”

FDP_SDI.2.1/DTBS The TSF shall monitor user data stored within the TSC for **[integrity error]** on all objects, based on the following attributes: **[integrity checked stored data].**

FDP_SDI.2.2/DTBS Upon detection of a data integrity error, the TSF shall:
[1. prohibit the use of the altered data
2. inform the Signatory about integrity error.]

Application note:

DTBS is input into the TOE by the Signing command. It is not stored in the card between two commands.

6.1.3.7 FDP_UCT Inter-TSF user data confidentiality transfer protection

FDP_UCT.1 Basic data exchange confidentiality

FDP_UCT.1/Receiver

FDP_UCT.1.1/Receiver The TSF shall enforce the [**SCD Import SFP, Personalization SFP and Change RAD SFP**] to be able to [**receive**] objects in a manner protected from unauthorized disclosure.

Application note: Type 2 only.

6.1.3.8 FDP_UIT Inter-TSF user data integrity transfer protection

FDP_UIT.1: Data exchange integrity

FDP_UIT.1/SVD Transfer

FDP_UIT.1.1/ Transfer **SVD** The TSF shall enforce the [**SVD Transfer SFP**] to be able to [**transmit**] user data in a manner protected from [**modification and insertion**] errors.

FDP_UIT.1.2/ Transfer **SVD** The TSF shall be able to determine on receipt of user data, whether [**modification and insertion**] has occurred.

FDP_UIT.1/TOE DTBS

FDP_UIT.1.1/TOE DTBS The TSF shall enforce the [**Signature-creation SFP**] to be able to [**receive**] user data in a manner protected from [**modification, deletion and insertion**] errors.

FDP_UIT.1.2/TOE DTBS The TSF shall be able to determine on receipt of user data, whether [**modification, deletion and insertion**] has occurred.

Refinement: The mentioned user data is the DTBS-representation.

6.1.4 FIA: Identification and authentication

6.1.4.1 FIA_AFL Authentication failure

FIA_AFL.1 Authentication failure handling

FIA_AFL.1.1 The TSF shall detect when [**3**] **unsuccessful authentication attempts** occur related to [**consecutive failed authentication attempts**].

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been met or surpassed, the TSF shall [**block RAD**]

Refinement:

When the RAD is blocked, any attempt of authentication fails.

Remark: Link with Authenticate SFP.

6.1.4.2 FIA_ATD User attribute definition

FIA_ATD.1 User attributes definition

FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users [RAD]

Remark: Link with personalization SFP and Change RAD SFP.

6.1.4.3 FIA_UAU User authentication

FIA_UAU.1 Timing of authentication

FIA_UAU.1.1 The TSF shall allow

- 1 [Identification of the user by means of TSF required by FIA_UID.1]**
- 2 [Establishing a trusted channel between the TOE and a SSCD of type 1 by means of TSF required by FTP_ITC.1/SCD import]**
- 3 [Establishing a trusted path between local user and the TOE by means of TSF required by FTP_TRP.1/TOE]**
- 4 [Establishing a trusted channel between the SCA and the TOE by means of TSF required by FTP_ITC.1/DTBS import]**

on behalf of the user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

Application note:

“Local user” mentioned in component FIA_UAU.1.1 is the user using the trusted path provided between the SGA in the TOE environment and the TOE as indicated by FTP_TRP.1/SCA and FTP_TRP.1/TOE.

Note: The TSF shall allow no Signature generation related action to be performed before user is authenticated. That means that other actions, not specifically related to the Signature creation, may be performed before user is authenticated.

Dependencies: FIA_UID.1 Timing of identification.

6.1.4.4 FIA_UID User Identification

FIA_UID.1 Timing of identification

FIA_UID.1.1 The TSF shall allow

- 1 [Establishing a trusted channel between the TOE and a SSCD of type 1 by means of TSF required by FTP_ITC.1/SCD import]**
- 2 [Establishing a trusted path between local user and the TOE by means of TSF required by FTP_TRP.1/TOE]**
- 3 [Establishing a trusted channel between the SCA and the TOE by means of TSF required by FTP_ITC.1/DTBS import]**

on behalf of the user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

SECURITY TARGET TOE CIE/CNS

Note: The TSF shall allow no Signature generation related action to be performed before user is identified. That means that other actions, not specifically related to the Signature creation, may be performed before user is identified.

6.1.5 FMT: Security management

6.1.5.1 FMT MOF Management of functions in TSF

FMT_MOF.1 Management of security functions behavior

FMT_MOF.1.1 The TSF shall restrict the ability to [enable] the [signature-creation function] to [Signatory].

6.1.5.2 FMT MSA Management of security attributes

FMT_MSA.1 Management of security attributes

FMT_MSA.1/Administrator

FMT_MSA.1.1/ Administrator The TSF shall enforce the [Initialization SFP] and [SCD Import SFP] to restrict the ability to [modify] the security attributes [SCD / SVD management and secure SCD import allowed]_to [Administrator].

Application note:

The SCD Import SFP enforcing comes from Type 2.

The Initialisation SFP enforcing comes from Type 3.

FMT_MSA.1/Signatory

FMT_MSA.1.1/ Signatory The TSF shall enforce the [Signature-creation SFP] to restrict the ability to [modify] the security attributes [SCD operational] to [Signatory].

FMT_MSA.2 Secure security attributes

FMT_MSA.2.1 The TSF shall ensure that only secure values are accepted for security attributes.

FMT_MSA.3 Static attribute initialization

FMT_MSA.3/Type 2

FMT_MSA.3.1/Type 2 The TSF shall enforce the [SCD Import SFP] and [Signature-creation SFP] to provide [restrictive] default values for security attributes that are used to enforce the SFP.

Refinement

The security attribute of the SCD "SCD operational" is set to "no" after import of the SCD.

SECURITY TARGET TOE CIE/CNS

FMT_MSA.3.2/Type 2 The TSF shall allow the [**Administrator**] to specify alternative initial values to override the default values when an object or information is created.

FMT_MSA.3/Type 3

FMT_MSA.3.1/Type 3 The TSF shall enforce the [**Initialization SFP**] and [**Signature-creation SFP**] to provide [**restrictive**] default values for security attributes that are used to enforce the SFP.

Refinement

The security attribute of the SCD "SCD operational" is set to "no" after generation of the SCD.

FMT_MSA.3.2/Type 3 The TSF shall allow the [**Administrator**] to specify alternative initial values to override the default values when an object or information is created.

6.1.5.3 FMT_MTD Management of TSF data

FMT_MTD.1 Management of TSF data

FMT_MTD.1.1 The TSF shall restrict the ability to [**modify**] the [**RAD**] to [**Signatory**].

Note: RAD being the PIN code, RAD and VAD are the same data.

Remark: Link with Change RAD SFP.

6.1.5.4 FMT_SMF Specification of Management Functions

FMT_SMF.1 Specification of Management Functions

FMT_SMF.1.1 The TSF shall be capable of performing the following functions [**Identification and authentication management**].

Additional SFR

6.1.5.5 FMT_SMR Security management roles

FMT_SMR.1 Security roles

FMT_SMR.1.1 The TSF shall maintain the roles [**Administrator**] and [**Signatory**].

FMT_SMR.1.2 The TSF shall be able to associate users with roles.

6.1.6 FPT: Protection of the TSF

6.1.6.1 FPT_AMT Underlying Abstract machine test

FPT_AMT.1 Underlying Abstract machine test

FPT_AMT.1.1 The TSF shall run a suite of tests [**during initial start-up**] to demonstrate the correct operation of the security assumptions provided by the abstract machine that underlies the

TSF.

Refinement:

In this document, the underlying abstract machine test is the IC and its library.

Remark: Link with Protection SFP.

6.1.6.2 FPT_EMSEC TOE Emanation

FPT_EMSEC.1.1 TOE Emanation

FPT_EMSEC.1.1 The TOE shall not emit [**Side channel current**] in excess of [**State of the art limits**] enabling access to [**RAD and SCD**].

Notes:

This SFR is an extension to [CCPART 2].

State of the art limits are the limits currently expected for IC meeting EAL4+ level of security.

FPT_EMSEC.1.2 The TSF shall ensure [**all users**] are unable to use the following interface [**external contacts**] emanations to gain access to [**RAD and SCD**].

Notes:

This SFR is an extension to [CCPART 2].

State of the art limits are the limits currently expected for IC meeting EAL4+ level of security.

Remark: Link with Protection SFP.

6.1.6.3 FPT_FLS Failure secure

FPT_FLS.1 Failure with preservation of secure state

FPT_FLS.1.1 The TSF shall preserve a secure state when the following types of failures occur: **power shortage, over and under voltage, over and under clock frequency, over and under temperature, integrity problems, unexpected abortion of the execution of the TSF due to external events.**].

Remark: Link with Protection SFP.

6.1.6.4 FPT_PHP TSF physical Protection

FPT_PHP.1 Passive detection of physical attack

FPT_PHP.1.1 The TSF shall provide unambiguous detection of physical tampering that might compromise the TSF.

FPT_PHP.1.2 The TSF shall provide the capability to determine whether physical tampering with the TSF's devices or TSF's elements has occurred.

FPT_PHP.3 Resistance to physical attack

FPT_PHP.3.1 The TSF shall resist [voltage, clock frequency and temperature out of bounds as well as penetration attacks] to the [integrated circuit] by responding automatically such that the TSP is not violated

Remark: Link with Protection SFP.

6.1.6.5 FPT_TST TSF self test

FPT_TST.1 TSF testing

FPT_TST.1.1 The TSF shall run a suite of self-tests [during initial start-up] to demonstrate the correct operation of the TSF.

FPT_TST.1.2 The TSF shall provide authorized users with the capability to verify the integrity of TSF data.

FPT_TST.1.3 The TSF shall provide authorized users with the capability to verify the integrity of stored TSF executable code.

Remark: Link with Protection SFP.

6.1.7 FTP: Trusted Path / Channel

6.1.7.1 FTP_ITC Inter-TSF trusted channel

FTP_ITC.1 Inter-TSF trusted Channel

FTP_ITC.1/SCD import

FTP_ITC.1.1/SCD import The TSF shall provide a communication channel between itself and a remote trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP_ITC.1.2/SCD import The TSF shall permit [the remote trusted IT product] to initiate communication via the trusted channel.

FTP_ITC.1.3/SCD import The TSF shall initiate communication via the trusted channel for [SCD import]

Refinement: The mentioned remote trusted IT product is a SSCD of type 1.

Application note:

The SCD Import must be protected in Integrity. This protection must be ensured by crypto mechanisms in the TOE. No "Trusted Environment" can ensure this integrity.
Type 2 only.

Remark: Link with SCD import SFP.

FTP_ITC.1/SVD Transfer

FTP_ITC.1.1/SVD Transfer The TSF shall provide a communication channel between itself and a remote trusted IT product that is logically distinct from other communication channels

SECURITY TARGET
TOE CIE/CNS

	and provides assured identification of its end points and protection of the channel data from modification or disclosure.
FTP_ITC.1.2/SVD Transfer	The TSF shall permit [the remote trusted IT product] to initiate communication via the trusted channel.
FTP_ITC.1.3/SVD Transfer	The TSF shall initiate communication via the trusted channel for [SVD Transfer]

Refinement: The mentioned remote trusted IT product is a CGA or the SCA application that will transmit the SVD to the CGA.

Application note:

The SVD Transfer must be protected in Integrity. This protection can be ensured by crypto mechanisms in the TOE. It can also be ensured by a "Trusted Environment". At personalization time, the Issuer will be able to assess if the usage environment will be a "Trusted Environment".

Remark: Link with SVD transfer SFP.

FTP_ITC.1/ DTBS import

FTP_ITC.1.1/DTBS import	The TSF shall provide a communication channel between itself and a remote trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.
FTP_ITC.1.2/DTBS import	The TSF shall permit [the remote trusted IT product] to initiate communication via the trusted channel.
FTP_ITC.1.3/DTBS import	The TSF shall initiate communication via the trusted channel for [signing DTBS-representation]

Refinement: The mentioned remote trusted IT product is a SCA.

Application note:

The DTBS Import must be protected in Integrity. This protection can be ensured by crypto mechanisms in the TOE. It can also be ensured by a "Trusted Environment". At personalization time, the Issuer will be able to assess if the usage environment will be a "Trusted Environment".

Remark: Link with Signature creation SFP.

6.1.7.2 FTP_TRP Trusted path

FTP_TRP.1 Trusted path

FTP_TRP.1.1	The TSF shall provide a communication path between itself and [local] users that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from modification or disclosure.
FTP_TRP.1.2	The TSF shall permit [local users] to initiate communication via the trusted path.
FTP_TRP.1.3	The TSF shall require the use of the trusted path for [initial user authentication][no other service].

Application note:

SECURITY TARGET

TOE CIE/CNS

The RAD/VAD Import must be protected in Integrity and confidentiality. This protection can be ensured by crypto mechanisms in the TOE. It can also be ensured by a “Trusted Environment”. At personalization time, the Issuer will be able to assess if the usage environment will be a “Trusted Environment”.

6.2 SECURITY ASSURANCE REQUIREMENTS

The TOE security assurance requirements define the assurance requirements for the TOE using only assurance components drawn from [CCPART3].

The assurance level is **EAL4** augmented on:

- **ADV_IMP.2** (Complete mapping of the implementation representation of the TSF)
- **ALC_DVS.2** (Sufficiency of security measures)
- **AVA_MSU.3 (Misuse - Analysis and testing for insecure states)**
- And **AVA_VLA.4 (Vulnerability Analysis - Highly resistant)**.

6.2.1 TOE security assurance requirements list

All requirements below are those from [PP SSCD3].

Identification	DESCRIPTION
ACM	Configuration management
ACM_AUT.1	Partial CM automation
ACM_CAP.4	Generation support and acceptance procedures
ACM_SCP.2	Problem tracking CM coverage
ADO	Delivery and Operation
ADO_DEL.2	Detection of modification
ADO_IGS.1	Installation, generation and start-up procedures
ADV	Development
ADV_FSP.2	Fully defined external interfaces
ADV_HLD.2	Security enforcing high-level design
ADV_IMP.2	Implementation of the TSF
ADV_LLD.1	Descriptive low-level design
ADV_RCR.1	Informal correspondence demonstration
ADV_SPM.1	Informal TOE security policy model
AGD	Guidance documents
AGD_ADM.1	Administrator guidance
AGD_USR.1	User guidance
ALC	Life cycle support
ALC_DVS.2	Sufficiency of security measures
ALC_LCD.1	Developer defined life-cycle model
ALC_TAT.1	Well-defined development tools
ATE	Tests
ATE_COV.2	Analysis of coverage

SECURITY TARGET
TOE CIE/CNS

ATE_DPT.1	Testing: high –level design
ATE_FUN.1	Functional testing
ATE_IND.2	Independent testing – sample
AVA	Vulnerability assessment
AVA_MSU.3	Analysis and testing for insecure states
AVA_SOF.1	Strength of TOE security function evaluation
AVA_VLA.4	Highly resistant

Table 6 . TOE security assurance requirements list

6.3 SECURITY REQUIREMENTS FOR THE IT ENVIRONMENT

This section describes the IT security requirements that are to be met by the IT environment of the TOE. The IT environment of the TOE is composed of the Certification Generation Application (CGA) and the Signature Creation Application (SCA).

These requirements are as stated in [PP SSCD2] & [PP SSCD3].

6.3.1 Signature key generation (SSCD Type1)

6.3.1.1 FCS_CKM.1: Cryptographic key generation

FCS_CKM.1.1 The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [**RSA key generation**] and specified cryptographic key sizes [**1024 bits or 1536 bits**] that meet the following: **none (generation of random numbers and Miller- Rabin primality testing)**.

6.3.1.2 FCS_CKM.4: Cryptographic key destruction

FCS_CKM.4.1/ Type1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method [**physical irreversible destruction of the stored key value**] that meets the following: [**no standard**].

Application notes:

The cryptographic key SCD will be destroyed automatically after export.

6.3.1.3 FCS_COP.1: Cryptographic operation

FCS_COP.1.1/C ORRESP The TSF shall perform SCD / SVD correspondence verification in accordance with a specified cryptographic algorithm [**RSA key generation**] and cryptographic key sizes [**1024 bits or 1536 bits**] that meet the following: [**no standard**].

SECURITY TARGET
TOE CIE/CNS

6.3.1.4 FDP_ACC.1: Subset access control

FDP_ACC.1.1/ SCD Export SFP The TSF shall enforce the SCD Export SFP on export of SCD by Administrator.

6.3.1.5 FDP_UCT.1: Basic data exchange confidentiality

FDP_UCT.1.1/ Sender The TSF shall enforce the SCD Export SFP to be able to transmit objects in a manner protected from unauthorised disclosure.

6.3.1.6 FTP_ITC.1: Inter-TSF trusted channel

FTP_ITC.1.1/ SCD Export The TSF shall provide a communication channel between itself and a remote trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.

FTP_ITC.1.2/ SCD Export The TSF shall permit **[the remote trusted IT product]** to initiate communication via the trusted channel.

FTP_ITC.1.3/ SCD Export The TSF or the SSCD Type2 shall initiate communication via the trusted channel for SCD export.

Refinement: The mentioned remote trusted IT product is a SSCD Type2

Application note:

If the TOE exports the SVD to a SSCD Type2 and the SSCD Type 2 holds the SVD then the trusted channel between the TOE and the SSCD type 2 will be required.

6.3.2 Certification Generation application (CGA)

6.3.2.1 FCS_CKM.2

FCS_CKM.2.1 / CGA	The TSF shall distribute cryptographic keys in accordance with a specified cryptographic key distribution method [qualified certificate] that meets the following [TDES 112 bits or Diffie-Hellman 1024]
-------------------	--

6.3.2.2 FCS_CKM.3

FCS_CKM.3.1 / CGA	The TSF shall perform [import the SVD] in accordance with a specified cryptographic key access method [import through a secure channel] that meets the following: [no standard]
-------------------	--

6.3.2.3 FDP_UIT.1

FDP_UIT.1.1 / SVD Import	The TSF shall enforce the <u>SVD Import SFP</u> to be able to <u>receive</u> user data in a manner protected from <u>modification</u> and <u>insertion errors</u> .
--------------------------	---

SECURITY TARGET
TOE CIE/CNS

FDP_UIT.1.2 / SVD Import	The TSF shall be able to determine on receipt of user data, whether <u>modification</u> and <u>insertion</u> has occurred.
--------------------------	--

6.3.2.4 FTP_ITC.1

FTP_ITC.1.1 / SVD Import	The TSF shall provide a communication channel between itself and a remote trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.
FTP_ITC.1.2 / SVD Import	The TSF shall permit [the TSF] to initiate communication via the trusted channel.
FTP_ITC.1.3 / SVD Import	The TSF or the remote trusted IT product shall initiate communication via the trusted channel for [import SVD]

6.3.3 Signature creation application (SCA)

6.3.3.1 FCS_COP.1

FCS_COP.1.1 / SCA Hash	The TSF shall perform [hashing the DTBS] in accordance with a specified cryptographic algorithm [SHA-1 or SHA-256] and cryptographic key sizes [none] that meet the following: [FIPS 180-2] , hash length = 160 or 256 bits .
---------------------------	--

6.3.3.2 FDP_UIT.1

FDP_UIT.1.1 / SCA DTBS	The TSF shall enforce the <u>Signature-creation SFP</u> to be able to <u>transmit</u> user data in a manner protected from <u>modification</u> , <u>deletion</u> , and <u>insertion</u> errors.
FDP_UIT.1.2 / SCA DTBS	The TSF shall be able to determine on receipt of user data, whether <u>modification</u> , <u>deletion</u> , and <u>insertion</u> has occurred.

6.3.3.3 FTP_ITC.1

FTP_ITC.1.1 / SCA DTBS	The TSF shall provide a communication channel between itself and a remote trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.
FTP_ITC.1.2 / SCA DTBS	The TSF shall permit <u>the TSF</u> to initiate communication via the trusted channel.
FTP_ITC.1.3 / SCA DTBS	The TSF or the remote trusted IT product shall initiate communication via the trusted channel for [signing DTBS-representation by means of the SSCD]

6.3.3.4 FTP_TRP.1

FTP_TRP.1.1 /	The TSF shall provide a communication path between itself and
---------------	---

SECURITY TARGET
TOE CIE/CNS

SCA	<u>local</u> users that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from modification or disclosure.
FTP_TRP.1.2 / SCA	The TSF shall permit the TSF to initiate communication via the trusted path.
FTP_TRP.1.3 / SCA	The TSF shall require the use of the trusted path for initial user authentication .

6.4 SECURITY REQUIREMENTS FOR THE NON-IT ENVIRONMENT

R.Administrator_Guide

Application of Administrator Guidance

The implementation of the requirements of the Directive, ANNEX II “Requirements for certification-service-providers issuing qualified certificates”, literal (e), stipulates employees of the CSP or other relevant entities to follow the administrator guidance provided for the TOE. Appropriate supervision of the CSP or other relevant entities shall ensure the ongoing compliance.

R.Sigy_Guide

Application of User Guidance

The SCP implementation of the requirements of the Directive, ANNEX II “Requirements for certification-service-providers issuing qualified certificates”, literal (k), stipulates the signatory to follow the user guidance provided for the TOE.

R.Sigy_Name

Signatory’s name in the Qualified Certificate

The CSP shall verify the identity of the person to which a qualified certificate is issued according to the Directive [1], ANNEX II “Requirements for certification-service-providers issuing qualified certificates”, literal (d). The CSP shall verify that this person holds the SSCD which implements the SCD corresponding to the SVD to be included in the qualified certificate.

7 TOE SUMMARY SPECIFICATION

The security functions provided by the IC are described in [IC ST]. The security functions provided by the platform are described in [ST_PLTF_ADRIATIC].

This section presents the security functions provided by the CIE/CNS applet.

Identification	Name
SF_SIG_AUTHENTICATION	Authentication management
SF_SIG_CRYPTO	Cryptography management
SF_SIG_INTEGRITY	Integrity monitoring
SF_SIG_MANAGEMENT	Management of operations & access control
SF_SIG_SECURE_MESSAGING	Secure messaging management

Table 7. TOE Security functions List

7.1 SF_SIG_AUTHENTICATION: AUTHENTICATION MANAGEMENT

This security function manages the authentication mechanisms such as:

- Authentication operations by PIN verification (for role management)
- Authentication by external authentication (with symmetric and asymmetric schemes).

This security function:

- Manages authentication failure: when the pre-defined number (3) of unsuccessful authentication attempts has been met or surpassed, the TSF shall block D.RAD. (Pre-defined number put at personalization phase)
- Manage the asset D.RAD.
- Handles the authentications during the personalization and application phases.

This SF allows the following operations to be performed before the user is authenticated:

- Identification of the user
- Establishing a trusted path between local user and the TOE
- Establishing a trusted channel between the SCA and the TOE for D.DTBS import
- Establishing a trusted channel between the TOE and the SSCD Type 1 for D.SCD import

7.2 SF_SIG_CRYPTO: CRYPTOGRAPHY MANAGEMENT

This function manages residual information protection (related to SCD, VAD and RAD) and ONLY the cryptographic operations of the electronic signature application (cryptographic operations not related to the electronic signature are not involved on this SF.):

- Key generation and correspondence verification (for RSA keypairs)
- Key destruction
- Perform cryptographic operations

This function is supported by platform security function SF_CARD_CRYPTO that provides cryptographic algorithms TDES, RSA and RNG and ensures that D.SCD information is made unavailable after key destruction.

7.3 SF_SIG_INTEGRITY: INTEGRITY MONITORING

This SF monitors the integrity of sensitive user data and the integrity of the DTBS. The integrity of persistently stored data such as D.SCD, D.RAD and D.SVD is monitored using the platform security function SF_CARD_INTEGRITY.

In case of integrity error this SF will

- Prohibit the use of the altered data, and
- Inform the S.Signatory about integrity error.

This SF also monitors the integrity of the access conditions of created data objects.

7.4 SF_SIG_MANAGEMENT: MANAGEMENT OF OPERATIONS AND ACCESS CONTROL

This SF provides application operation management and access control.

Operation management

This SF manages the electronic signature application during its initialization and operation. This SF manages the security environment of the application and:

- Maintains the roles S.Signatory, S.Admin.
- Controls if the authentication required for a specific operation has been performed with success.
- Manages restriction to security function access and to security attribute modification.
- Ensures that only secure values are accepted for security attributes.

This SF restricts the ability to perform the function **Signature-creation SFP** to S.Signatory. This SF ensures that only S.Admin is authorized to

- Modify **Initialization SFP** and **Signature-creation SFP** attributes
- Specify alternative default values

This SF ensures that only S.Signatory is authorized to modify D.RAD (**Change RAD SFP**)

Access control

This SF provides the electronic signature application with access control and ensures that the following operations are executed by authorized roles:

- Export of D.SVD by S.User (**SVD transfer SFP**)
- Import of D.SCD by S.User(**SCD Import SFP**)
- Generation of D.SCD/D.SVD pair by S.User
- Creation of D.RAD by S.Admin (**Personalization SFP**)
- Signing of D.DTBS-representation by S.Signatory (**Signature-creation SFP**)

This SF provides access control to data objects.

This SF enforces the security policy on the import and the export of user data on:

- **SVD Transfer SFP**: D.SVD shall be sent to an authenticated CGA.
- **Signature-creation SFP**: D.DTBS shall be sent by an authenticated SCA.

7.5 SF_SIG_SECURE_MESSAGING

This SF ensures the integrity and the confidentiality of exchanged user data.

This SF ensures that the TSF is able to

- Receive D.SCD with protection from unauthorized disclosure.
- Transmit D.SVD with protection from modification and insertion errors.
- Receive D.DTBS with protection from modification, deletion and insertion errors.
- Determine on received user data whether modification, deletion or insertion has occurred.

SECURITY TARGET

TOE CIE/CNS

This SF manages four modes of secure channel during the personalization phase and usage phase

- No secure messaging
- Integrity mode
- Confidentiality mode
- Integrity and confidentiality mode

Platform secure channel (SF_CARD_SECURE_MESSAGING) is used only at pre-personalization phase.

Specific and proprietary CIE secure channel is used at usage phase with support of SF_CARD_CRYPTO security function.