



**HP PageWide Enterprise Color 556,
HP PageWide Managed Color E55650,
HP LaserJet Enterprise M607 / M608 / M609,
HP LaserJet Managed E60055 / E60065 / E60075,
HP PageWide Enterprise Color 765,
HP PageWide Managed Color E75160,
HP LaserJet Enterprise Color M652 / M653,
HP LaserJet Managed Color E65050 / E65060**

Security Target

Version: 2.05
Status: Final
Last Update: 2019-08-05

Trademarks

The following terms are trademarks of Hewlett-Packard Development Company, L.P. in the United States, other countries, or both.

- HP®
- LaserJet®
- PageWide®

The following terms are trademarks of The Institute of Electrical and Electronics Engineers, Incorporated in the United States, other countries, or both:

- 2600.1™
- IEEE®

The following term is a trademark of Massachusetts Institute of Technology (MIT) in the United States, other countries, or both:

- Kerberos™

The following terms are trademarks of Microsoft Corporation in the United States, other countries, or both:

- Microsoft®
- SharePoint®
- Windows®

The following term is a trademark of INSIDE Secure in the United States, other countries, or both:

- INSIDE Secure®
- QuickSec®

Other company, product, and service names may be trademarks or service marks of others.

Legal Notices

This document is provided AS IS with no express or implied warranties. Use the information in this document at your own risk.

This document may be reproduced or distributed in any form without prior permission provided the copyright notice is retained on all copies. Modified versions of this document may be freely distributed provided that they are clearly identified as such, and this copyright is included intact.

Revision History

Revision	Date	Author(s)	Changes to Previous Revision
2.05	2019-08-05	Gerardo Colunga	Final. Public version.

Table of Contents

- 1 Introduction..... 8**
- 1.1 Security Target Identification 8
- 1.2 TOE Identification 8
- 1.3 TOE Type 8
- 1.4 TOE Overview 8
 - 1.4.1 Required and optional non-TOE hardware, software, and firmware..... 9
 - 1.4.2 Intended method of use..... 9
- 1.5 TOE Description..... 10
 - 1.5.1 TOE models and firmware versions 10
 - 1.5.2 TOE architecture 14
 - 1.5.3 TOE security functionality (TSF) summary..... 18
 - 1.5.3.1 Auditing 18
 - 1.5.3.2 Cryptography 18
 - 1.5.3.3 Identification and authentication 19
 - 1.5.3.4 Data protection and access control 21
 - 1.5.3.5 Protection of the TSF 23
 - 1.5.3.6 TOE access protection..... 23
 - 1.5.3.7 Trusted channel communication and certificate management 23
 - 1.5.3.8 User and access management 24
 - 1.5.4 TOE boundaries 24
 - 1.5.4.1 Physical boundary 24
 - 1.5.4.2 Logical boundary 25
 - 1.5.4.3 Evaluated configuration..... 25
 - 1.5.5 Security policy model 26
 - 1.5.5.1 Subjects/Users 26
 - 1.5.5.2 Objects 27
 - 1.5.5.3 SFR package functions 29
 - 1.5.5.4 SFR package attributes..... 30
- 2 CC Conformance Claim..... 31**
- 2.1 Protection Profile tailoring and additions 31
 - 2.1.1 IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A" ([PP2600.1])..... 31
 - 2.1.2 SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions ([PP2600.1-DSR]) 35
 - 2.1.3 SFR Package for Hardcopy Device Print Functions ([PP2600.1-PRT])..... 36
 - 2.1.4 SFR Package for Hardcopy Device Shared-medium Interface Functions ([PP2600.1-SMI]) 36
- 3 Security Problem Definition..... 37**
- 3.1 Introduction 37
- 3.2 Threat Environment..... 37
 - 3.2.1 Threats countered by the TOE 37
- 3.3 Assumptions 38
 - 3.3.1 Environment of use of the TOE 38
 - 3.3.1.1 Physical 38
 - 3.3.1.2 Personnel..... 38
 - 3.3.1.3 Connectivity 38
- 3.4 Organizational Security Policies 38
 - 3.4.1 Included in the PP2600.1 protection profile..... 38
 - 3.4.2 In addition to the PP2600.1 protection profile..... 39
- 4 Security Objectives 40**
- 4.1 Objectives for the TOE 40
- 4.2 Objectives for the Operational Environment..... 40
- 4.3 Security Objectives Rationale..... 41
 - 4.3.1 Coverage..... 41
 - 4.3.2 Sufficiency 43
- 5 Extended Components Definition..... 49**

- 5.1 Class FPT: Protection of the TSF 49
 - 5.1.1 Restricted forwarding of data to external interfaces (FDI) 49
 - 5.1.1.1 FPT_FDI_EXP.1 - Restricted forwarding of data to external interfaces..... 49
 - 5.2.1.1 FCS_RBG_EXT.1 – Random Bit Generation..... 50
- 6 Security Requirements 50**
 - 6.1 TOE Security Functional Requirements 50
 - 6.1.1 Security audit (FAU) 53
 - 6.1.1.1 Audit data generation (FAU_GEN.1) 53
 - 6.1.1.2 User identity association (FAU_GEN.2) 54
 - 6.1.2 Cryptographic support (FCS) 54
 - 6.1.2.1 Cryptographic key generation (FCS_CKM.1-ipsec)..... 54
 - 6.1.2.2 Cryptographic key generation (FCS_CKM.1-job) 55
 - 6.1.2.3 Cryptographic key establishment (FCS_CKM.2) 55
 - 6.1.2.4 Cryptographic operation (FCS_COP.1-ipsec)..... 56
 - 6.1.2.5 Cryptographic operation (FCS_COP.1-job) 56
 - 6.1.2.6 Random Bit Generation (FCS_RBG_EXT.1) 57
 - 6.1.3 User data protection (FDP) 57
 - 6.1.3.1 Common access control SFP (FDP_ACC.1-cac) 57
 - 6.1.3.2 TOE function access control SFP (FDP_ACC.1-tfac)..... 58
 - 6.1.3.3 Common access control functions (FDP_ACF.1-cac) 58
 - 6.1.3.4 TOE function access control functions (FDP_ACF.1-tfac) 59
 - 6.1.3.5 Subset residual information protection (FDP_RIP.1) 59
 - 6.1.4 Identification and authentication (FIA) 59
 - 6.1.4.1 Local sign-in method authentication failure handling (FIA_AFL.1)..... 59
 - 6.1.4.2 Local user attribute definition (FIA_ATD.1) 60
 - 6.1.4.3 Verification of secrets (FIA_SOS.1)..... 60
 - 6.1.4.4 Timing of Control Panel authentication (FIA_UAU.1) 60
 - 6.1.4.5 IPsec authentication before any action (FIA_UAU.2) 61
 - 6.1.4.6 Control Panel protected authentication feedback (FIA_UAU.7) 61
 - 6.1.4.7 Timing of Control Panel identification (FIA_UID.1) 61
 - 6.1.4.8 IPsec identification before any action (FIA_UID.2) 62
 - 6.1.4.9 User-subject binding (FIA_USB.1) 62
 - 6.1.5 Security management (FMT) 63
 - 6.1.5.1 Management of security functions (FMT_MOF.1) 63
 - 6.1.5.2 Management of security attributes (FMT_MSA.1) 63
 - 6.1.5.3 Management of TSF data (FMT_MTD.1) 66
 - 6.1.5.4 Specification of management functions (FMT_SMF.1)..... 66
 - 6.1.5.5 Security roles (FMT_SMR.1) 67
 - 6.1.6 Protection of the TSF (FPT) 67
 - 6.1.6.1 Restricted forwarding of data to external interfaces (FPT_FDI_EXP.1) 67
 - 6.1.6.2 Reliable time stamps (FPT_STM.1) 67
 - 6.1.6.3 TSF testing (FPT_TST.1)..... 67
 - 6.1.7 TOE access (FTA)..... 68
 - 6.1.7.1 TSF-initiated termination of Control Panel sign-in session (FTA_SSL.3) 68
 - 6.1.8 Trusted path/channels (FTP) 68
 - 6.1.8.1 Inter-TSF trusted channel (FTP_ITC.1)..... 68
 - 6.2 Security Functional Requirements Rationale 68
 - 6.2.1 Coverage..... 68
 - 6.2.2 Sufficiency 71
 - 6.2.3 Security requirements dependency analysis 77
 - 6.3 Security Assurance Requirements..... 80
 - 6.4 Security Assurance Requirements Rationale 82
- 7 TOE Summary Specification..... 83**
 - 7.1 TOE Security Functionality 83
 - 7.1.1 Auditing 83
 - 7.1.2 Cryptography 89
 - 7.1.3 Identification and authentication (I&A) 89
 - 7.1.3.1 Control Panel I&A 89
 - 7.1.3.2 IPsec I&A 91
 - 7.1.4 Data protection and access control 92
 - 7.1.4.1 Permission Sets 92
 - 7.1.4.2 Job PINs 93
 - 7.1.4.3 Job Encryption Passwords 93

7.1.4.4	Common access control.....	94
7.1.4.5	TOE function access control.....	94
7.1.4.6	Residual information protection.....	95
7.1.5	Protection of the TSF.....	95
7.1.5.1	Restricted forwarding of data to external interfaces.....	95
7.1.5.2	TSF self-testing.....	95
7.1.5.3	Reliable timestamps.....	95
7.1.6	TOE access protection.....	96
7.1.6.1	Inactivity timeout.....	96
7.1.7	Trusted channel communication and certificate management.....	96
7.1.8	User and access management.....	98
8	Abbreviations, Terminology and References.....	99
8.1	Abbreviations.....	99
8.2	Terminology.....	101
8.3	References.....	102

List of Tables

Table 1: TOE Reference	12
Table 2: English-only guidance documentation	13
Table 3: IPsec user mappings to allowed network protocols	20
Table 4: Users	27
Table 5: User Data	28
Table 6: TSF Data.....	29
Table 7: TSF Data Listing.....	29
Table 8: SFR package functions.....	30
Table 9: SFR package attributes	30
Table 10: SFR mappings between 2600.1 and the ST	34
Table 11: SFR mappings of non-PP2600.1 SFRs and the ST (in the ST, but not required by or hierarchical to SFRs in PP2600.1).....	35
Table 12: SFR mappings between 2600.1-DSR and the ST.....	36
Table 13: SFR mappings between 2600.1-PRT and the ST.....	36
Table 14: SFR mappings between 2600.1-SMI and the ST.....	36
Table 15: Mapping of security objectives to threats and policies	42
Table 16: Mapping of security objectives for the Operational Environment to assumptions, threats and policies	43
Table 17: Sufficiency of objectives countering threats	45
Table 18: Sufficiency of objectives holding assumptions	46
Table 19: Sufficiency of objectives enforcing Organizational Security Policies.....	48
Table 20: Security functional requirements for the TOE	53
Table 21: Auditable events.....	54
Table 22: Asymmetric cryptographic key generation	55
Table 23: Cryptographic key establishment	55
Table 24: Cryptographic operations for IPsec	56
Table 25: Cryptographic operations	57
Table 26: Common Access Control SFP.....	58
Table 27: Management of functions.....	63
Table 28: Management of security attributes	65
Table 29: Management of TSF data	66
Table 30: Mapping of security functional requirements to security objectives	71
Table 31: Security objectives for the TOE rationale	77
Table 32: TOE SFR dependency analysis	80
Table 33: Security assurance requirements.....	82
Table 34: TOE audit records	88
Table 35: Trusted channel connections	96

List of Figures

Figure 1: HCD physical diagram	14
Figure 2: HCD logical scope.....	18

1 Introduction

1.1 Security Target Identification

Title: HP PageWide Enterprise Color 556,
 HP PageWide Managed Color E55650,
 HP LaserJet Enterprise M607 / M608 / M609,
 HP LaserJet Managed E60055 / E60065 / E60075,
 HP PageWide Enterprise Color 765,
 HP PageWide Managed Color E75160,
 HP LaserJet Enterprise Color M652 / M653,
 HP LaserJet Managed Color E65050 / E65060

Security Target

Version: 2.05

Status: Final

Date: 2019-08-05

Sponsor: HP Inc.

Developer: HP Inc.

Certification Body: CSEC

Certification ID: CSEC2017008

Keywords: HP Inc., HP, LaserJet, PageWide, Color LaserJet, LaserJet Managed, Color LaserJet Managed, LaserJet Enterprise, Color LaserJet Enterprise, PageWide Enterprise, PageWide Managed, PageWide Enterprise Color, hardcopy device, HCD, printer, SFP, 556, E55650 M607, M608, M609, E60055, E60065, E60075, 765, E75160, M652, E65050, M653, E65060

1.2 TOE Identification

The TOE is the HP FutureSmart 4.6.3 firmware for the HP PageWide Enterprise Color 556, HP PageWide Managed Color E55650, HP LaserJet Enterprise M607 / M608 / M609, HP LaserJet Managed E60055 / E60065 / E60075, HP PageWide Enterprise Color 765, HP PageWide Managed Color E75160, HP LaserJet Enterprise Color M652 / M653, HP LaserJet Managed Color E65050 / E65060. The complete list of models and firmware versions is provided in [Table 1](#).

1.3 TOE Type

The TOE type is the internal firmware providing the functionality of a network single-function printer (SFP).

1.4 TOE Overview

The TOE models are enterprise network SFPs designed to be shared by many client computers and users. These products are designed to meet the requirements of the [PP2600.1] protection profile.

The TOE contains functions for printing, storing, and retrieving of documents. These hardcopy devices (HCDs), as they are called in [PP2600.1], are self-contained units that include processors, memory,

networking, one storage drive, and a print engine. The operating system, web servers, and Control Panel applications (i.e., applications that run internally on the HCD) reside within the firmware of the HCD.

The TOE is the contents of the firmware with the exception of the operating system which are part of the Operational Environment.

Each model provides the following security features:

- Auditing
- Cryptography
- Identification and authentication
- Data protection and access control
- Protection of the TSF (restricted forwarding, TSF self-testing, timestamps)
- TOE access protection (Inactivity Timeout)
- Trusted channel communication and certificate management
- User and access management

1.4.1 Required and optional non-TOE hardware, software, and firmware

The following *required* components are part of the Operational Environment.

- The applicable SFP model from [Table 1](#) for running the TOE firmware.
- Domain Name System (DNS) server
- One administrative client computer connected to the TOE in the role of an Administrative Computer. It must contain:
 - Web browser
- One or both of the following:
 - Lightweight Directory Access Protocol (LDAP) server
 - Windows domain controller/Kerberos server
- Syslog server
- Windows Internet Name Service (WINS) server

The following *optional* components are part of the Operational Environment.

- SNMP tool that supports SNMPv1/v2 for reading objects and that supports SNMPv3 for reading and writing objects installed on the administrative computer connected to the TOE in the role of an Administrative Computer.
- Client computers connected to the TOE in a non-administrative computer role
- Network Time Service (NTS) server
- HP Print Drivers, including the HP Universal Print Driver, for client computers (for submitting print job requests from client computers)
- Simple Mail Transfer Protocol (SMTP) gateway

1.4.2 Intended method of use

[PP2600.1] is defined for a commercial information processing environment in which a high level of document security, network security, and security assurance are required.

The TOE is intended to be used in non-hostile, networked environments where TOE users have direct physical access to the HCDs for printing, storing, and retrieving of documents. The physical environment should be reasonably controlled and/or monitored where physical tampering of the HCDs would be evident and noticed.

The TOE can be connected to multiple client computers via a wired local area network using HP's Jetdirect Inside in the evaluated configuration. The evaluated configuration uses secure network mechanisms for communication between the network client computers and the TOE. The TOE is managed by one designated administrative computer. The TOE is not intended be connected to the Internet.

The evaluated configuration contains a built-in user identification and authentication database (a.k.a. sign in method) used for Local Device Sign In that is part of the TOE. It also supports a Windows domain controller (via Kerberos) for a feature called Windows Sign In and a Lightweight Directory Access Protocol (LDAP) authentication server for a feature called LDAP Sign In to identify and authenticate users. The Windows domain controller and LDAP server are part of the Operational Environment.

The evaluated configuration supports the Embedded Web Server (EWS) interface for managing the TOE using a web browser over HTTP. (Web browsers are part of the Operational Environment.)

The Universal Serial Bus (USB) ports are disabled in the evaluated configuration.

1.5 TOE Description

1.5.1 TOE models and firmware versions

Table 1 shows the HCD models included in this evaluation.

Physically speaking, all models use the same ASIC that contains the processor which executes the TSF executable code. All models contain one field-replaceable nonvolatile storage drive. They all have a Control Panel for operating the HCD locally and Ethernet network capability for connecting to a network. They all support submission of print jobs over the network and remote administration over the network. The main physical differences between models are floor models versus table top models, the number and size of paper feeders, print speed, and whether or not they contain a stapler/stacker.

All TOE models use the same Jetdirect Inside firmware version.

- 1) JSI24050246

The TOE includes the following System firmware versions.

- 1) 2405268_022711
- 2) 2405268_022708
- 3) 2405268_022745
- 4) 2405268_022697

Table 1 includes a mapping of the System firmware versions to the TOE models.

Product family	Model	Product number	System firmware version
HP PageWide Enterprise Color	556dn	G1W46A	2405268_022711
HP PageWide Enterprise Color	556xh	G1W47A	
HP PageWide Managed Color	E55650dn	L3U44A	
HP LaserJet Enterprise	M607n	K0Q14A	2405268_022708

Product family	Model	Product number	System firmware version
HP LaserJet Enterprise	M607dn	K0Q15A	
HP LaserJet Enterprise	M608n	K0Q17A	
HP LaserJet Enterprise	M608dn	K0Q18A	
HP LaserJet Enterprise	M608x	K0Q19A	
HP LaserJet Enterprise	M609dn	K0Q21A	
HP LaserJet Enterprise	M609dh	K0Q20A	
HP LaserJet Enterprise	M609x	K0Q22A	
HP LaserJet Managed	E60055dn	M0P33A	
HP LaserJet Managed	E60065dn	M0P35A	
HP LaserJet Managed	E60065x	M0P36A	
HP LaserJet Managed	E60075dn	M0P39A	
HP LaserJet Managed	E60075x	M0P40A	
HP PageWide Enterprise Color	765dn	J7Z04A	2405268_022745
HP PageWide Managed Color	E75160dn	J7Z06A	
HP LaserJet Enterprise Color	M652n	J7Z98A	2405268_022697
HP LaserJet Enterprise Color	M652dn	J7Z99A	
HP LaserJet Enterprise Color	M653dn	J8A04A	
HP LaserJet Enterprise Color	M653dh	J8A06A	
HP LaserJet Enterprise Color	M653x	J8A05A	
HP LaserJet Managed Color	E65050dn	L3U55A	

Product family	Model	Product number	System firmware version
HP LaserJet Managed Color	E65060dn	L3U56A	

Table 1: TOE Reference

The following table lists the English-guidance documentation for the TOE:

SFP models	Title	Reference
All	<p>Common Criteria Evaluated Configuration Guide for HP Single-Function Printers</p> <p>HP LaserJet Enterprise M607/M608/M609, HP LaserJet Managed E60055/E60065/E60075, HP Color LaserJet Enterprise M652/M653, HP Color LaserJet Managed E65060/E65060, HP PageWide Enterprise Color 556, HP PageWide Enterprise Color 765, HP PageWide Managed Color E55650, HP PageWide Managed Color E75160</p> <p>Edition 1, 6/2019</p>	[CCECG]
556dn, 556xh, E55650dn	<p>HP PageWide Enterprise Color 556</p> <p>User Guide</p> <p>Edition 1, 5/2016</p>	[556-UG]
	<p>HP PageWide Enterprise Color 556</p> <p>Installation Guide</p> <p>2016</p>	[556-IG]
M607n, M607dn, M608n, M608dn, M608x, M609dn M609dh, M609x, E60055dn, E60065dn, E60065x, E60075dn, E60075x	<p>HP LaserJet Enterprise M607, M608, M609</p> <p>User Guide</p> <p>Edition 2, 8/2017</p>	[M607_8_9-UG]
	<p>HP LaserJet Enterprise M607, M608, M609</p> <p>Installation Guide</p> <p>2017</p>	[M607_8_9-IG]
765dn	<p>HP PageWide Enterprise Color 765, HP PageWide Color 755</p>	[765-UG]

SFP models	Title	Reference
	User Guide Edition 4, 1/2019	
	HP PageWide Enterprise Color 765 series HP PageWide Color 755 series Installation Guide 2018	[765-IG]
E75160dn	HP PageWide Managed Color E75160, P75250 User Guide Edition 2, 3/2018	[E75160-UG]
	HP PageWide Managed Color E75160 Series HP PageWide Managed Color P75250 Series Installation Guide Edition 1,3/2018	[E75160-IG]
M652n, M652dn, M653dn, M653x, M653dh, E65050dn, E65060dn	HP Color LaserJet Enterprise M652, M653 User Guide Edition 1, 5/2017	[M652_3-UG]
M652n, M652dn, E65050dn	HP Color LaserJet Enterprise M652 Installation Guide 2017	[M652-IG]
M653dn, M653x, M653dh, E65060dn	HP Color LaserJet Enterprise M653 Installation Guide 2017	[M653-IG]

Table 2: English-only guidance documentation

The firmware, [CCECG], and other supporting files are packaged in a single ZIP file (i.e., a file in ZIP archive file format). This ZIP file is available for download from the HP Inc. website. The firmware is packaged in this ZIP file as a single firmware bundle. This firmware bundle contains the HP FutureSmart firmware, which in turn contains the System firmware and JDI firmware.

1.5.2 TOE architecture

As mentioned previously, the TOE is the firmware of an SFP designed to be shared by many client computers and human users. It performs the functions of printing, storing, and retrieving of documents. It can be connected to a wired local network through the embedded Jetdirect Inside's built-in Ethernet or to a USB device using its USB port (but the use of which must be disabled in the evaluated configuration).

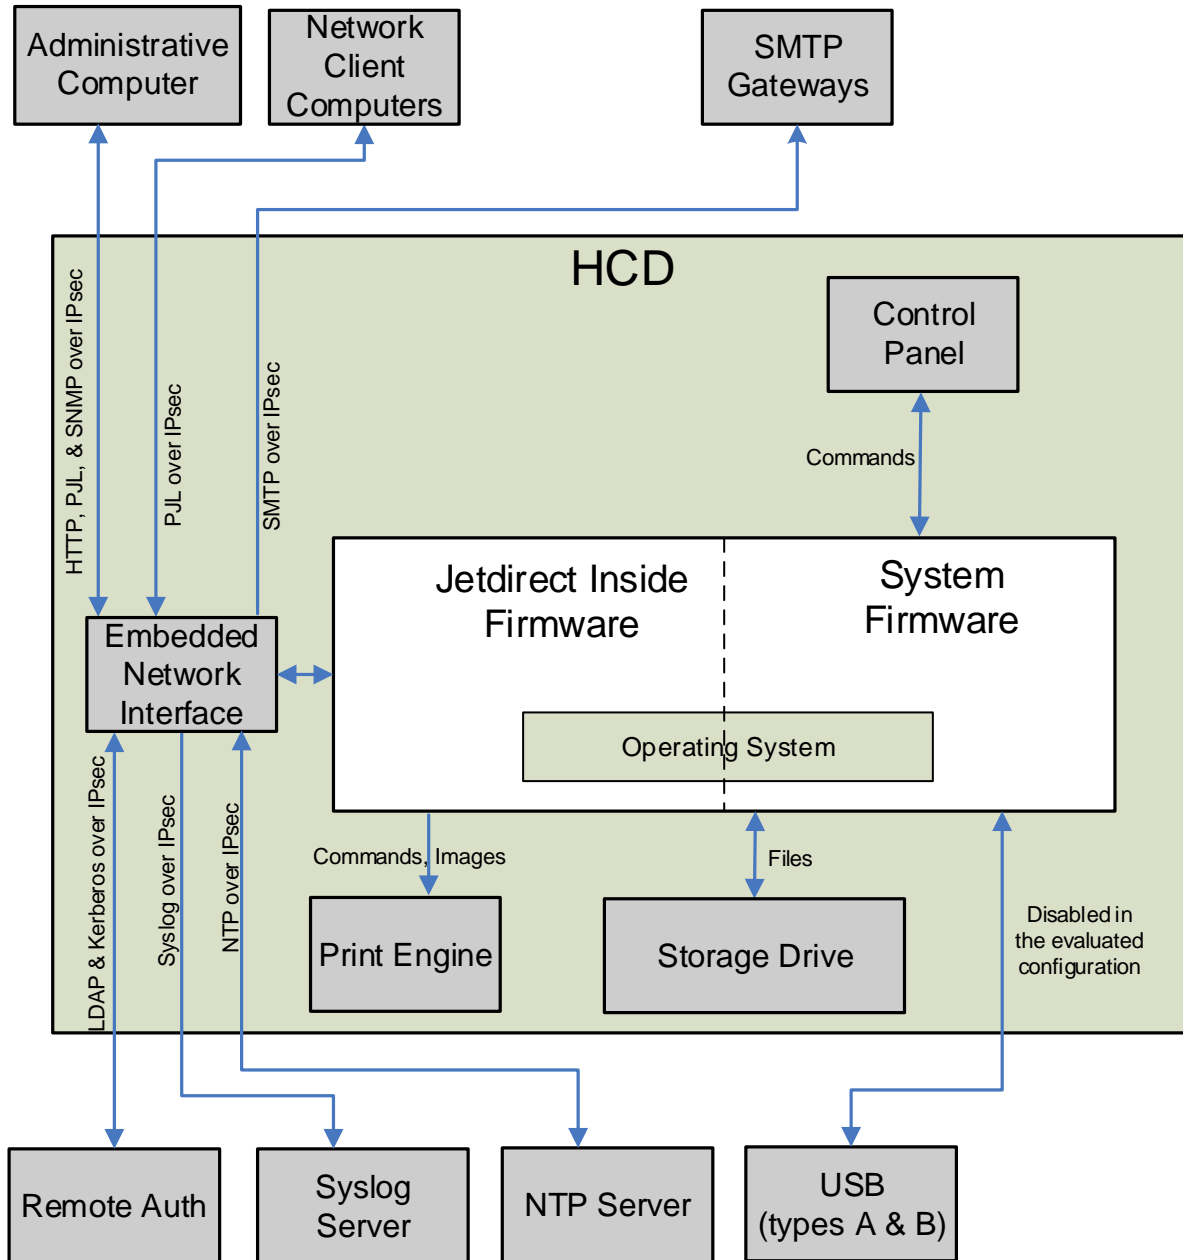


Figure 1: HCD physical diagram

Figure 1 shows a high-level physical diagram of an HCD with the unshaded areas representing the TOE and the shaded areas indicating components that are part of the Operational Environment.

At the top of this figure is the Administrative Computer which connects to the TOE using Internet Protocol Security (IPsec) with X.509v3 certificates for both mutual authentication and for protection of data from

disclosure and alteration. This computer can administer the TOE using the following interfaces over the IPsec connection:

- Embedded Web Server (EWS)
- Simple Network Management Protocol (SNMP)

The HTTP-based EWS administrative interface allows administrators to remotely manage the features of the TOE using a web browser.

The SNMP network interface allows administrators to remotely manage the TOE using external SNMP-based administrative applications.

Printer Job Language (PJL) is used in a non-administrative capacity by the Administrative Computer. The Administrative Computer uses PJL to send print jobs to the TOE as well as to receive job status. In general, PJL supports password-protected administrative commands, but in the evaluated configuration these commands are disabled. For the purposes of this Security Target, we define the PJL Interface as PJL data sent to networking port 9100 on the TOE.

The TOE protects all non-broadcast/non-multicast network communications with IPsec, which is part of the embedded Jetdirect Inside firmware. Though IPsec supports multiple authentication methods, in the evaluated configuration, both ends of the IPsec connection are authenticated using X.509v3 certificates. An identity certificate for the TOE must be created outside the TOE, signed by a Certificate Authority (CA), and imported (added) into the TOE along with the Certificate Authority's CA certificate.

Because IPsec authenticates the computers (IPsec authenticates the computer itself; IPsec does not authenticate the individual users of the computer), access to the Administrative Computer should be restricted to TOE administrators only.

The TOE distinguishes between the Administrative Computer and Network Client Computers by using IP addresses, IPsec, and the embedded Jetdirect Inside's internal firewall. In the evaluated configuration, the number of Administrative Computers used to manage the TOE is limited to one and the Device Administrator Password must be set.

The evaluated configuration supports the following SNMP versions:

- SNMPv1 read-only
- SNMPv2c read-only
- SNMPv3

Network Client Computers connect to the TOE using IPsec with X.509v3 certificates to protect the communication and to mutually authenticate. These client computers can send print jobs to the TOE using the PJL Interface as well as receive job status.

The TOE protects stored jobs with either a 4-digit Job PIN or by accepting (and storing) an encrypted job from a client computer. Both protection mechanisms are optional by default and are mutually exclusive of each other if used. In the evaluated configuration, every stored job must either be assigned a 4-digit Job PIN or be an encrypted job.

The TOE can send email alert messages to administrator-specified email addresses, or send automated emails regarding product configuration and SFP supplies to HP. The TOE supports protected communications between itself and Simple Mail Transfer Protocol (SMTP) gateways. It uses IPsec with X.509v3 certificates to protect the communications and to mutually authenticate with the SMTP gateway. The TOE can only protect unencrypted email up to the SMTP gateway. It is the responsibility of the Operational Environment to protect emails from the SMTP gateway to the email's destination. Also, the TOE can only send emails; it does not accept inbound emails.

Each HCD contains a user interface called the Control Panel. Depending on the SFP model, the Control Panel contains either a non-touchscreen LCD or a touchscreen LCD. The Control Panel is the physical interface that a user uses to communicate with the TOE when physically using the HCD. The LCD screen displays information such as menus and status to the user.

On SFP models that contain a Control Panel with a non-touchscreen LCD, the Control Panel also contains a physical keypad that contains a numeric keypad and the following buttons:

- Sign In or Sign Out
- Information
- Help
- OK
- Back
- Up arrow
- Down arrow
- Left arrow
- Right Arrow
- Start
- Cancel
- Clear
- Message Center

On SFP models that contain a Control Panel with a touchscreen LCD, the Control Panel also contains Home button. It also provides virtual buttons to the user such as an alphanumeric keypad for entering usernames and passwords.

When a user signs in at the Control Panel, a Permission Set is associated with their session which determines the functions the user is permitted to perform.

The TOE's Control Panel supports local and remote sign-in methods for I&A of users.

- Local sign-in method
 - Local Device Sign In
- Remote sign-in methods
 - LDAP Sign In
 - Windows Sign In

The Local Device Sign In method maintains the account information within the TOE. Only the Device Administrator account, which is an administrative account, is supported through this method in the evaluated configuration. The remote sign-in methods are called LDAP Sign In and Windows Sign In (i.e., Kerberos). The TOE uses IPsec with X.509v3 certificates to protect both the LDAP and Kerberos communications.

The Print Engine in [Figure 1](#) converts electronic documents into hardcopy form.

All SFP models contain a persistent storage drive (a.k.a. storage drive) that resides in the Operational Environment. Depending on the SFP model, the storage drive will either be eMMC or the HP High-Performance Secure Hard Disk. For SFP models that contain eMMC, the HP High-Performance Secure Hard Disk is available as an accessory and be purchased to replace the eMMC.

The storage drive contains a section called Job Storage which is a user-visible file system where stored print jobs are stored/held. (Job types are discussed in [section 1.5.5.2.1.](#))

If the SFP model contains eMMC, all jobs in Job Storage are automatically deleted when the HCD is turned off. If the SFP model contains the HP High Performance Secure Hard Disk, jobs in Job Storage can persist

across power-cycles or can be deleted, depending on how the administrator configures the TOE and on the job type.

The TOE supports the auditing of document-processing functions and security-relevant events by generating and forwarding audit records to a remote syslog server. The TOE uses IPsec with X.509v3 certificates to protect the communications between itself and the syslog server and for mutual authentication of both endpoints.

The Jetdirect Inside Firmware and HCD System Firmware components comprise the firmware on the system. They are shown as two separate components but they both share the same operating system (OS). The operating system is part of the Operational Environment. Both firmware components also contain an Embedded Web Server (EWS).

The Jetdirect Inside firmware includes SNMP, IPsec, a firewall, and the management functions for managing these network-related features. The Jetdirect Inside firmware also provides the network stack and drivers controlling the TOE's embedded Ethernet interface.

The HCD System Firmware controls the overall functions of the TOE from the Control Panel to the storage drive(s) to the print jobs.

Figure 2 shows the HCD boundary in grey and the firmware (TOE) boundary in blue (the TOE being comprised of the HCD System firmware and the Jetdirect Inside firmware excluding the underlying operating system). The Jetdirect Inside firmware provides the network connectivity and network device drivers used by the HCD System firmware. The HCD System firmware and Jetdirect Inside firmware share the same operating system (which is part of the Operational Environment). The HCD System firmware also includes internal Control Panel applications that drive the functions of the TOE. Both firmware components work together to provide the security functionality defined in this document for the TOE.

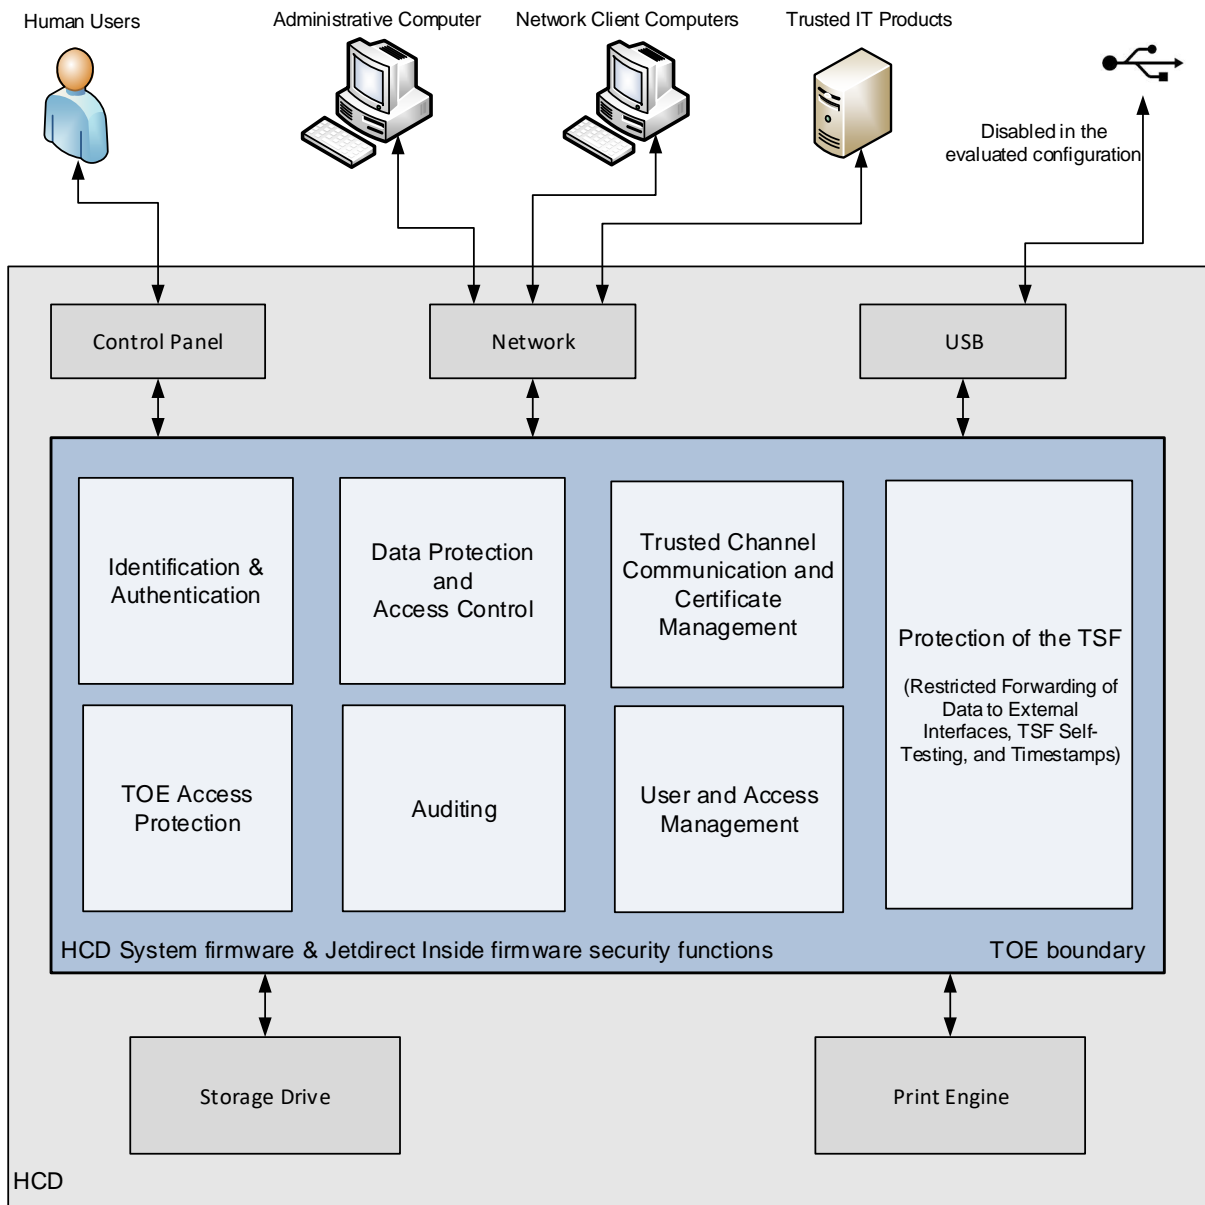


Figure 2: HCD logical scope

1.5.3 TOE security functionality (TSF) summary

1.5.3.1 Auditing

The TOE performs auditing of document-processing functions and security-relevant events. Both the Jetdirect Inside and HCD System firmware generate audit records. The TOE connects and sends audit records to a syslog server for long-term storage and audit review. (The syslog server is part of the Operational Environment.)

1.5.3.2 Cryptography

The TOE uses IPsec to protect its communications channels. The QuickSec cryptographic library, which is part of the Operational Environment, is used to supply the cryptographic algorithms for IPsec. See [section 1.5.3.7](#) for more information.

The TOE supports key derivation and decryption for printing encrypted stored print jobs. Both the key derivation function and decryption algorithm used by the TOE for this are included in the TOE. See section 1.5.3.4.3 for more information.

1.5.3.2.1 Cryptography outside the scope of the TOE

This section exists to inform the reader that the HCD contains other cryptography that is outside the scope of the TOE, is **not** part of this evaluation, and is **not** used to fulfill any of the [PP2600.1] requirements.

The HP High-Performance Secure Hard Disk provides hardware-based cryptography and persistent storage to securely manage sensitive document and system data. Data on this drive is encrypted and the encryption key is locked to the HCD. The cryptographic functionality is transparent to the TOE and to the user. Not all SFP models in this evaluation contain this storage drive. The SFP models that do not, instead contain eMMC. For SFP models that contain eMMC, the HP High-Performance Secure Hard Disk is available as an accessory (HP part #: B5L29-67903).

Certain areas of the eMMC are encrypted under the control of the TOE using the HCD's hardware.

1.5.3.3 Identification and authentication

1.5.3.3.1 Control Panel I&A

From the Control Panel, the user can perform the following actions prior to authentication.

- Viewing of help information
- Viewing of device status information
- Viewing of network connectivity status information
- Viewing of system time
- Viewing of Web Services status information
- Viewing of Welcome screen
- Selection of Sign In
- Selection of sign-in method from Sign In screen
- Selection of an application
- Printing of help information
- Printing of network connectivity status information
- Changing language for the session
- Resetting of session

The Control Panel user cannot perform any other TSF-mediated actions until after the user has been successfully identified and authenticated.

Users select the sign in method from a menu of sign in methods. The menu options vary depending on the number of remote sign-in methods configured for the TOE. The Control Panel supports the following local and remote sign-in methods in the evaluated configuration.

The mechanism for the local sign-in method, which is part of the TOE firmware, is called:

- Local Device Sign In

Remote sign-in methods used by the TOE are:

- LDAP Sign In
- Windows Sign In (via Kerberos)

Although the Local Device Sign In method supports multiple accounts, only the built-in Device Administrator account (U.ADMINISTRATOR) is to be used with this method in the evaluated configuration. The administrator must not create any Local Device Sign In accounts.

For successful authentication using a remote sign-in method, Control Panel users must enter their username and password as defined on the remote authentication server.

When users sign in through the Control Panel, the TOE displays dots for each character of access code or password typed to prevent onlookers from viewing another user's authentication data. The TOE also contains account lockout functionality for the built-in Device Administrator account to help prevent password discovery through a brute-force attack.

1.5.3.3.2 IPsec I&A

Client computers can connect to the TOE to submit print jobs and to manage the TOE. The TOE uses IPsec to identify and mutually authenticate client computers that attempt to connect to the TOE.

The client computers that connect to the TOE are considered IPsec users and are classified as either Network Client Computers or the Administrative Computer. The TOE uses IP addresses to identify these users and Rivest-Shamir-Adleman (RSA) X.509v3 certificates to authenticate the users. The IP address of a connecting client computer must be defined in the TOE's IPsec/Firewall in order for the computer to be considered authorized to access the TOE. Any client computer not defined in the TOE's IPsec/Firewall is considered unauthorized and is blocked by the firewall from accessing the TOE.

The TOE uses IPsec/Firewall address templates, service templates, and rules to map IP addresses to network service protocols. An address template contains one or more IP addresses. A service template contains one or more allowed network service protocols. A rule contains a mapping of an address template to a service template. Through the rules, an administrator determines the User Role of the client computers (i.e., the administrator determines which client computer is the Administrative Computer and which client computers are the Network Client Computers). In the evaluated configuration, the IPsec/Firewall only allows the Administrative Computer to connect to all interfaces supported by the TOE. The Network Client Computers are limited to just the PJI Interface (TCP port 9100). Table 3 shows the mapping of IPsec users to their allowed network protocols.

IPsec user	Allowed network protocol access
Administrative Computer (U.ADMINISTRATOR)	EWS (HTTP), SNMP, PJI
Network Client Computer (U.NORMAL)	PJI (TCP port 9100 only)

Table 3: IPsec user mappings to allowed network protocols

Because IPsec mutual authentication is performed at the computer level, not the user level, the computer allowed by the firewall to access the TOE via the EWS and SNMP must itself be the Administrative Computer. This means that non-TOE administrative users should not be allowed to logon to the Administrative Computer because every user of the Administrative Computer is potentially a TOE administrator.

IPsec is configured to use X.509v3 certificates via the Internet Key Exchange (IKE) protocols. Both IKEv1 and IKEv2 are supported in the evaluated configuration.

In addition, the TOE can contact many types of trusted IT products using IPsec and mutual authentication. The TOE contacts these trusted IT products either to send data to them (e.g., send email alert to the SMTP Gateway) or to request information from them (e.g., authenticate a user using LDAP). The TOE mutually authenticates these servers via IPsec prior to sending data or requesting information from them.

1.5.3.4 Data protection and access control

1.5.3.4.1 Permission Sets

The TOE controls user access to functions available at the Control Panel using permissions. Each Control Panel application and protected feature has an associated permission. A permission is configured to either grant or deny access. Permissions are defined in Permission Sets (a.k.a. User Roles) which are assigned to users. To execute a Control Panel application or protected feature, the applicable permission must be configured to grant access in the Permission Set applied to a user. The Permission Set applied to a user is a combination of Permission Sets assigned to the user.

The TOE contains built-in Permission Sets. The built-in Permission Sets are:

- Device Guest
- Device Administrator
- Device User

Built-in Permission Sets cannot be deleted or renamed. Additionally, the permissions defined in the Device Administrator Permission Set cannot be configured (i.e. the permissions are always set to grant access).

In addition to the built-in Permission Sets, the TOE provides the ability to add custom Permission Sets.

Permission Sets are stored in the TOE and are managed via the EWS.

The following table lists the access control level each Permission Set provides, and the User Role each Permission Set is assigned to in the evaluated configuration.

Permission Set	Access control level	Assigned to User Role
Device Guest	None (The Device Guest Permission Set has all permissions configured to deny access.)	All
Device Administrator	Administrative (The Device Administrator Permission Set has all permissions set to grant access. With all permissions set to grant access, the Device Administrator Permission Set provides access to all functions.)	U.ADMINISTRATOR
Device User	Non-administrative (The Device User Permission Set has all permissions for administrative functions configured to deny access.)	U.NORMAL

Permission Set	Access control level	Assigned to User Role
Custom (if any are added by U.ADMINISTRATOR)	Non-administrative (The Device User Permission Set has all permissions for administrative functions configured to deny access.)	U.NORMAL

1.5.3.4.2 Job PINs

Users control access to print jobs that they place in Job Storage by assigning Job PINs to these jobs (required in the evaluated configuration). Job PINs must be 4 digits in length. Job PINs limit access to these jobs while they reside on the TOE and allow users to control when the jobs are printed so that physical access to the hard copies can be controlled.

1.5.3.4.3 Job Encryption Password

The TOE can store and decrypt encrypted stored print jobs received from a client computer that has the HP Universal Print Driver installed. A stored print job is first encrypted by the client computer using a user-specified Job Encryption Password. The job is then sent encrypted to the TOE and stored encrypted by the TOE.

To print or delete an encrypted stored print job at the Control Panel, a non-administrative user must provide the correct Job Encryption Password for the encrypted stored print job. An administrative user can delete an encrypted stored print job at the Control Panel without providing a Job Encryption Password but must provide the correct Job Encryption Password to print the job.

1.5.3.4.4 Common access control

The TOE protects each job in Job Storage from non-administrative users through the use of a user identifier and a Job PIN or through the use of just a Job Encryption Password. The user identifier for a print job received from a client computer is either automatically assigned by that client computer or assigned by the user sending the print job from the client computer. Every job in Job Storage is assigned either a Job PIN or a Job Encryption Password by the user at job creation time.

The default rules for a non-administrative (U.NORMAL) user for accessing a job in Job Storage are:

- if the job is Job PIN protected:
 - the job owner (i.e., the authenticated user who matches the job's user identifier) can access the job without supplying the Job PIN
 - any non-owner authenticated user who supplies the correct Job PIN can access the job
- if the job is Job Encryption Password protected, any authenticated user who supplies the correct Job Encryption Password can access the job

A Control Panel administrator (U.ADMINISTRATOR) user has a permission in their Permission Set that allows the administrator to delete a job in Job Storage.

1.5.3.4.5 TOE function access control

For Control Panel users, the TOE controls access to Control Panel applications (e.g., Print from Device Memory) using Permission Sets and, optionally, sign-in methods (authentication databases). Permission Sets act as User Roles to determine if the user can perform a function controlled by permissions.

Each Control Panel application requires the user to have one or more specific permissions in their session Permission Set in order to access that application. In addition, the TOE's administrator can map a sign-in method to each Control Panel application and require the user to be authenticated to that sign-in method in order to access that application. The individual applications only check and enforce permissions. They

do not check the sign-in methods. Instead, the TOE enforces the sign-in method requirement at the time that the user signs in to the TOE by removing permissions from the user's session Permission Set for each application in which the user's sign-in method does not match the sign-in method required by the TOE. By removing the permissions required by each non-matching application, the TOE limits the set of applications that the user can access.

Administrators can change/modify the sign-in method mapped to each application. In addition, the TOE contains a function that allows administrators to select if the sign-in method application mappings are enforced or ignored by the TOE. This function is called "Allow users to choose alternate sign-in methods at the product control panel." When this function is disabled, the TOE enforces the "sign in method to application" mappings and prunes (reduces) the user's session Permission Set accordingly. When this function is enabled, the sign in method mappings are ignored by the TOE and the user's session Permission Set remains unchanged.

For IPsec users, the TOE uses the IPsec/Firewall to control access to the supported network service protocols. The IPsec/Firewall contains the IP addresses of authorized client computers grouped into address templates and the network service protocols grouped into service templates. The administrator maps an address template to a service template using an IPsec/Firewall rule. Service templates, therefore, act as the User Roles. IP addresses of computers not contained in a rule are denied access to the TOE.

1.5.3.4.6 Residual information protection

The TOE protects deleted objects by making them unavailable to TOE users via the TOE's interfaces. This prevents TOE users from attempting to recover deleted objects of other users via the TOE interfaces.

1.5.3.5 Protection of the TSF

1.5.3.5.1 Restricted forwarding of data to external interfaces

The TOE allows an administrator to restrict the forwarding of data received from an External Interface to the Shared-medium Interface. The TOE does not provide a pathway or support for commands necessary to achieve network access.

1.5.3.5.2 TSF self-testing

The TOE contains a suite of self tests to test specific security functionality of the TOE. It contains data integrity checks for testing specific TSF Data of the TOE and for testing the stored TOE executables.

1.5.3.5.3 Reliable timestamps

The TOE contains a system clock that is used to generate reliable timestamps. In the evaluated configuration, the TOE can optionally be configured to synchronize its system clock with a Network Time Protocol (NTP) server.

1.5.3.6 TOE access protection

1.5.3.6.1 Inactivity timeout

The Control Panel supports an Inactivity Timeout in case users forget to sign out of the Control Panel after signing in.

1.5.3.7 Trusted channel communication and certificate management

The TOE supports IPsec to protect data being transferred over the Shared-medium Interface. IPsec along with IKE use Diffie-Hellman (DH) key establishment (a.k.a. key exchange) to establish the key used for the secure channel, IP addresses and RSA X.509v3 certificates to identify and authenticate the endpoint, and the Advanced Encryption Standard (AES) with cipher block chaining (CBC) to protect the data transfers between the TOE and the endpoint using the key derived from the key establishment. DH uses the Digital Signature Algorithm (DSA) for key generation. In addition, the Secure Hash Algorithm (SHA) and Hashed Message Authentication Code (HMAC) based on SHA are used as part of the IPsec/IKE protocol. A deterministic random bit generator (DRBG)—specifically the counter DRBG CTR_DRBG(AES)

that uses AES—is used to generate cryptographically random numbers for creating encryption keys, key material, and secret keys.

The IPsec and IKE cryptographic algorithms are all supplied by the QuickSec cryptographic library. The QuickSec cryptographic library is part of the Operational Environment, but the TOE controls the usage of these algorithms.

In the evaluated configuration, the following IPsec cryptographic algorithms are supported:

- RSA 2048-bit, and 3072-bit signature generation and verification (Operational Environment)
- DSA 2048-bit, 3072-bit, 4096-bit, 6144-bit, and 8192-bit key pair generation (Operational Environment)
- DH (IKEv1, IKEv2) key establishment / exchange (Operational Environment)
- AES-128, AES-192, and AES-256 in CBC mode for data transfers (Operational Environment)
- AES-256 (with ECB mode) for the CTR_DRBG(AES) (Operational Environment)
- CTR_DRBG(AES) (Operational Environment)
- SHA-1, SHA-256, SHA-384, and SHA-512 hashing (Operational Environment)
- HMAC-SHA1-96 (Operational Environment)
- HMAC-SHA-256-128 (Operational Environment)
- HMAC-SHA-384-192 (Operational Environment)
- HMAC-SHA-512-256 (Operational Environment)

In addition, the TOE provides certificate management functions used to manage X.509v3 certificates used for IPsec authentication.

1.5.3.8 User and access management

The TOE provides management capabilities for managing its security functionality. The TOE supports the following roles:

- Administrator (U.ADMINISTRATOR)
- Normal User (U.NORMAL)

Administrators have the authority to manage the security functionality of the TOE and to manage normal users. Normal users can only manage user data that they have access to on the TOE.

1.5.4 TOE boundaries

1.5.4.1 Physical boundary

The physical boundary of the TOE is the programs and data stored in the firmware of the HCD (except for the embedded operating system) and the English-language guidance documentation.

QuickSec version 5.1 ([QuickSec51]) toolkit implements the TOE's IPsec including the IPsec/Firewall. The QuickSec toolkit includes a cryptographic library (a.k.a. encryption library) and an IPsec library. The QuickSec cryptographic library used by QuickSec for all IPsec cryptography is part of the Operational Environment.

QuickSec is developed and tested by INSIDE Secure. The QuickSec cryptographic algorithms used by the TOE were tested during the evaluation against a reference implementation of IPsec.

It is typical for an HCD, and thus the TOE, to be shared by many users and for those users to have direct physical access to the HCD. By design, users have easy access to some of the hardware features, such

as the Control Panel, the paper input trays, the paper output trays, and the power button. But other features such as the processor, volatile memory, and storage drive are located inside the HCD in the formatter cage. The formatter cage can be secured to the HCD chassis using a combination lock, thus, restricting normal user access to the components inside the cage.

Because of the restricted access to the storage drive, the drive is considered a non-removable non-volatile storage device from the perspective of [PP2600.1].

Due to the physical accessibility of the HCDs, they must be used in non-hostile environments. Physical access should be controlled and/or monitored.

The firmware, English-language guidance documentation, and other supporting files are packaged in a single ZIP file (i.e., a file in ZIP archive file format). This ZIP file is available for download from the HP Inc. website. The firmware is packaged in this ZIP file as a single firmware bundle. This firmware bundle contains two firmware modules.

- System firmware
- Jetdirect Inside firmware

The evaluated firmware module versions are provided in Table 1.

As seen in Table 1, there are multiple System firmware versions. Notice the first set of digits in the System firmware versions are all the same, but the second set varies. The first set of digits represents the version of the OS and other code that implement the security functions of the TOE. The second set of digits represents the drivers used to control the physical features—paper trays, document feeders, and output bins—of the TOE. Because different sets of models do not contain the exact same set of physical features, the second set of digits differs.

The consumer receives the hardware independent of the ZIP file. The evaluated hardware models, which are defined in Table 1, are either already on the consumer's premises or must be obtained from HP Inc.

1.5.4.2 Logical boundary

The security functionality provided by the TOE has been described above and includes:

- Auditing
- Cryptography
- Identification and authentication
- Data protection and access control
- Protection of the TSF (restricted forwarding, TSF self-testing, and timestamps)
- TOE access protection (Inactivity Timeout)
- Trusted channel communication and certificate management
- User and access management

1.5.4.3 Evaluated configuration

The following items will need to be adhered to in the evaluated configuration:

- Device Administrator Password must be set as per P.ADMIN.PASSWORD
- Only one Administrative Computer is used to manage the TOE
- Third-party solutions are not installed on the TOE
- All stored jobs must be assigned a Job PIN or job encryption password
- Device USB and Host USB plug and play must be disabled
- Firmware upgrades sent as print jobs through P9100 interface must be disabled

- Jetdirect Inside management via telnet and FTP must be disabled
- Jetdirect XML Services must be disabled
- External file system access through PJI and PS must be disabled
- IPsec authentication using X.509v3 certificates must be enabled (IPsec authentication using Kerberos or Pre-Shared Key is not supported)
- IPsec Authentication Headers (AH) must be disabled
- Device Guest permission set must have zero permissions enabled (this disables the Guest role)
- SNMP support limited to:
 - SNMPv1 read-only
 - SNMPv2c read-only
 - SNMPv3
- The Service PIN, used by a customer support engineer to access functions available to HP support personnel, must be disabled
- Near Field Communication (NFC) must be disabled
- Wireless Direct Print must be disabled
- PJI device access commands must be disabled
- User names for the LDAP and Windows Sign In users must only contain the characters defined in `P.USERNAME.CHARACTER_SET`
- Remote Control-Panel use is disallowed per `P.REMOTE_PANEL.DISALLOWED`
- Local Device Sign In accounts must not be created (i.e., only the Device Administrator account is allowed as a Local Device Sign In account).
- Access must be blocked to the following Web Services (WS):
 - Open Extensibility Platform device (OXPd) Web Services
 - WS* Web Services
- User Access Codes use is disabled
- An IPv4 address must be statically assigned as per the instructions in TOE's configuration guidance [CCECG]

1.5.5 Security policy model

This section describes the security policy model for the TOE. Much of the terminology in this section comes from [PP2600.1] and is duplicated here so that readers won't have to read [PP2600.1] to understand the terminology used in the rest of this Security Target document.

1.5.5.1 Subjects/Users

Users are entities that are external to the TOE and which interact with the TOE. TOE users are defined in Table 4.

Designation	Definition	
U.USER	Any authorized User. Authorized Users are U.ADMINISTRATOR and U.NORMAL.	
	Designation	Definition

Designation	Definition	
	U.NORMAL	A User who is authorized to perform User Document Data processing functions of the TOE.
	U.ADMINISTRATOR	A User who has been specifically granted the authority to manage some portion or all of the TOE and whose actions may affect the TOE security policy (TSP). A password must be set for all U.ADMINISTRATOR accounts in the evaluated configuration.

Table 4: Users

For the purpose of clarity in this Security Target, the following distinctions are made:

- **Control Panel users** – U.NORMAL and U.ADMINISTRATOR users who physically access the TOE's Control Panel.

Security attributes: User Role (defined by Permission Set) and User Identifier

- **IPsec users:**
 - **Network Client Computers** – Computers (U.NORMAL entities) that can successfully authenticate to the TOE's PJI Interface (TCP port 9100) using IPsec and mutual authentication. The TOE will accept print jobs from any user of a client computer where the client computer has successfully authenticated with the TOE.
 - **Security attributes:** User Role (defined by IPsec/Firewall service template) and User Identifier (defined by IP address)
 - **Administrative Computers** – Computers (U.ADMINISTRATOR entities) that can successfully authenticate to the TOE's administrative interfaces (e.g., EWS/HTTP and SNMP) using IPsec and mutual authentication. An Administrative Computer may also connect to the TOE as a Network Client Computer (i.e., the Administrative Computer can send print jobs as a U.NORMAL user through the PJI Interface on port 9100).
 - **Security attributes:** User Role (defined by IPsec/Firewall service template) and User Identifier (defined by IP address)

1.5.5.2 Objects

Objects are passive entities in the TOE that contain or receive information, and upon which Subjects perform Operations. Objects are equivalent to TOE Assets. There are three types of Objects:

- User Data
- TSF Data
- Functions

1.5.5.2.1 User Data

User Data are data created by and for Users and do not affect the operation of the TOE Security Functionality (TSF). This type of data is comprised of two objects:

- User Document Data
- User Function Data

Designation	Definition
D.DOC	User Document Data consists of the information contained in a user's document. This includes the original document itself in hardcopy or electronic form, image data, or residually-stored data created by the HCD while processing an original document and printed hardcopy output.
D.FUNC	User Function Data are the information about a user's document or job to be processed by the TOE.

Table 5: User Data

User Data objects include:

- **Print job types that use Job Storage:**
 - **Personal jobs** – Print jobs from a client computer that are stored in Job Storage. In the evaluated configuration, such jobs must be PIN protected with a Job PIN. These jobs are held until the user logs in to the Control Panel and releases the job. For PIN protected stored jobs, the user must be the job owner or know the Job PIN (or have administrator privileges) in order to delete the job. These jobs are automatically deleted after printing or if the HCD is turned off or after an administrator specified time interval. If the HCD contains the HP High Performance Secure Hard Disk, the administrator can configure the TOE to retain these jobs over a power cycle.
 - **Stored jobs** – Print jobs such as a personnel form, time sheet, or calendar from a client computer that are stored on the TOE and reprinted. In the evaluated configuration, such jobs must be PIN protected with a Job PIN. The administrator can configure the TOE to automatically delete these jobs after a specified time interval. For PIN protected stored jobs, the user must be the job owner or know the Job PIN (or have administrator privileges) in order to delete the job. If the HCD contains an eMMC, these jobs are automatically deleted when the HCD is turned off.
 - **Encrypted stored print jobs** – Print jobs like those described above but that require higher than normal protection (for example, documents containing company or employee confidential information). These jobs will be assigned a password by the submitter when submitted to the TOE. The user must know the password of the job in order to print or delete it. The administrator may delete it without knowing the password. If the HCD contains an eMMC, these jobs are automatically deleted when the HCD is turned off.

Ownership of a print job sent from a client computer is defined as the username associated with the job when it is submitted to the TOE. The username is specified outside of the TOE, in the Operational Environment, so it can neither be confirmed nor denied by the TOE.

1.5.5.2.2 TSF Data

TSF Data are data created by and for the TOE and that might affect the operation of the TOE. This type of data is comprised of two components: TSF Protected Data and TSF Confidential Data.

Designation	Definition
D.CONF	TSF Confidential Data are assets for which either disclosure or alteration by a user who is neither an administrator nor the owner of the data would have an effect on the operational security of the TOE.

Designation	Definition
D.PROT	TSF Protected Data are assets for which alteration by a user who is neither an administrator nor the owner of the data would have an effect on the operational security of the TOE, but for which disclosure is acceptable.

Table 6: TSF Data

The following table lists the TSF Data and the data designations.

TSF Data	D.CONF	D.PROT
Audit records	X	
Cryptographic keys and certificates	X	
Device and network configuration settings (including IPsec/Firewall rules and templates)		X
Job PINs associated with PIN-protected stored print jobs	X	
Content encryption keys associated with encrypted stored print jobs	X	
PJL protocol excluding the job data and Job PINs		X
Permission Sets		X
System time		X
User and Administrator identification data		X
User and Administrator authentication data	X	

Table 7: TSF Data Listing

1.5.5.3 SFR package functions

Functions perform processing, storage, and transmission of data. The following [PP2600.1]-defined functions apply to this Security Target.

Designation	Definition
F.DSR	Document storage and retrieval: a function in which a document is stored during one job and retrieved during one or more subsequent jobs
F.PRT	Printing: a function in which electronic document input is converted to physical document output

Designation	Definition
F.SMI	Shared-medium interface: a function that transmits or receives User Data or TSF Data over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple users, such as wired network media and most radio-frequency wireless media

Table 8: SFR package functions**1.5.5.4 SFR package attributes**

When a function is performing processing, storage, or transmission of data, the identity of the function is associated with that particular data as a security attribute. The following [PP2600.1]-defined attributes apply to this Security Target.

Designation	Definition
+DSR	Indicates data that is associated with a document storage and retrieval job.
+PRT	Indicates data that is associated with a print job.
+SMI	Indicates data that is transmitted or received over a shared-medium interface.

Table 9: SFR package attributes

2 CC Conformance Claim

This Security Target is CC Part 2 extended and CC Part 3 conformant, with a claimed Evaluation Assurance Level of EAL3, augmented by ALC_FLR.2.

This Security Target claims conformance to the following Protection Profiles and PP packages, if any:

- [PP2600.1]: IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A". Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-DSR]: SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions. Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-PRT]: SFR Package for Hardcopy Device Print Functions. Version 1.0 as of June 2009; demonstrable conformance.
- [PP2600.1-SMI]: SFR Package for Hardcopy Device Shared-medium Interface Functions. Version 1.0 as of June 2009; demonstrable conformance.

Common Criteria [CC] version 3.1 revision 5 is the basis for this conformance claim.

2.1 Protection Profile tailoring and additions

2.1.1 IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A" ([PP2600.1])

Although the HCDs in this Security Target contain a nonvolatile mass storage device (i.e., a storage drive), this device is considered an internal, built-in component of the HCDs and, therefore, constitutes a non-removable nonvolatile storage device from the perspective of [PP2600.1]. Because no removable nonvolatile storage devices exist in the HCDs, this Security Target does **not** claim conformance to "2600.1-NVS SFR Package for Hardcopy Device Nonvolatile Storage Functions, Operational Environment A" contained in [PP2600.1].

The following tables provide the mappings of and rationale for how the SFRs in this Security Target map to the SFRs in the protection profile [PP2600.1]. The term "n/a" means "not applicable". The term "common" is used to refer to that portion of [PP2600.1] to which all TOEs must conform (i.e., the portions not labeled as packages).

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FAU_GEN.1	FAU_GEN.1			The ST's FAU_GEN.1 combines the contents of FAU_GEN.1 from the common [PP2600.1] and FAU_GEN.1 from the [PP2600.1] SMI SFR package.
FAU_GEN.2	FAU_GEN.2			n/a

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1(a)	FDP_ACC.1-cac			The ST's FDP_ACC.1-cac combines the contents of the FDP_ACC.1(a) from the common [PP2600.1] and the FDP_ACC.1's from the [PP2600.1] packages claimed by the ST. The iteration name was changed from "(a)" to "-cac" (Common Access Control) for better understandability when reading the ST.
FDP_ACC.1(b)	FDP_ACC.1-tfac			The iteration name was changed from "(b)" to "-tfac" (TOE Function Access Control) for better understandability when reading the ST.
FDP_ACF.1(a)	FDP_ACF.1-cac			The ST's FDP_ACF.1-cac combines the contents of the FDP_ACF.1(a) from the common [PP2600.1] and the FDP_ACF.1's from the [PP2600.1] packages claimed by the ST. The iteration name was changed from "(a)" to "-cac" (Common Access Control) for better understandability when reading the ST.
FDP_ACF.1(b)	FDP_ACF.1-tfac			The iteration name was changed from "(b)" to "-tfac" (TOE Function Access Control) for better understandability when reading the ST.
FDP_RIP.1	FDP_RIP.1			n/a
FIA_ATD.1	FIA_ATD.1			n/a
FIA_UAU.1	FIA_UAU.1			The TOE's Control Panel supports authentication (FIA_UAU.1).
	FIA_UAU.2		X	The TOE supports IPsec authentication (FIA_UAU.2) which complies with the more restrictive FIA_UAU.2.

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FIA_UID.1	FIA_UID.1			The TOE's Control Panel supports identification (FIA_UID.1).
	FIA_UID.2		X	The TOE supports IPsec identification (FIA_UID.2) which complies with the more restrictive FIA_UID.2.
FIA_USB.1	FIA_USB.1			n/a
FMT_MSA.1(a)	FMT_MSA.1			FMT_MSA.1(a) was omitted because management of all security attributes can be covered by FMT_MSA.1.
FMT_MSA.1(b)	FMT_MSA.1			FMT_MSA.1(a) was omitted because management of all security attributes can be covered by FMT_MSA.1.
FMT_MSA.3(a)	None			FMT_MSA.3(a) was omitted because the security attributes do not have default values in the evaluated configuration.
FMT_MSA.3(b)	None			FMT_MSA.3(b) was omitted because the security attributes do not have default values in the evaluated configuration.
FMT_MTD.1.1(a)	FMT_MTD.1			Iteration was omitted because only TSF Data that is not associated with a Normal User can be managed.
FMT_MTD.1.1(b)	None			Iteration was omitted because only TSF Data that is not associated with a Normal User can be managed.
FMT_SMF.1	FMT_SMF.1			n/a
FMT_SMR.1	FMT_SMR.1			n/a

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FPT_STM.1	FPT_STM.1			Because the TOE can be configured to use NTP along with its internal time source, both A.SERVICES.RELIABLE and OE.SERVICES.RELIABLE apply.
FPT_TST.1	FPT_TST.1			n/a
FTA_SSL.3	FTA_SSL.3			n/a

Table 10: SFR mappings between 2600.1 and the ST

These SFRs in the Security Target are not required by and do not map to the protection profile [PP2600.1].

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
None	FCS_CKM.1-ipsec	X		FCS_CKM.1-ipsec specifies the type of cryptographic keys generated for IPsec key establishment.
None	FCS_CKM.1-job	X		FCS_CKM.1-job specifies key derivation function used by the TOE to unlock an encrypted stored print job.
None	FCS_CKM.2			FCS_CKM.2 specifies cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec
None	FCS_COP.1-ipsec	X		FCS_COP.1-ipsec specifies RSA signature generation and verification along with AES and HMAC cryptographic algorithms used by the TOE in IPsec.
None	FCS_COP.1-job	X		FCS_COP.1-job specifies the AES decryption algorithm used by the TOE for decrypting encrypted print jobs.

[PP2600.1] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
None	FIA_AFL.1			The TOE locks the Device Administrator account (a.k.a. Local Administrator account) after an administrator configurable positive integer of unsuccessful Control Panel authentication attempts via the Local Device Sign In method. Recommended by [PP2600.1] APPLICATION NOTE 38.
None	FIA_SOS.1			FIA_SOS.1 specifies the Job PIN strength of certain authorization mechanisms used by the TOE.
None	FIA_UAU.7			The TOE masks Job PINs, Access Codes, and passwords. Recommended by [PP2600.1] APPLICATION NOTE 38.
None	FMT_MOF.1	X		The TOE allows administrators to manage the security functions Control Panel authorization, Windows Sign In, LDAP Sign In, account lockout for Local Administrator account, Inactivity Timeout for Control Panel user sign-in sessions, enhanced security event logging, and IPsec.
None	FCS_RBG_EXT.1			FCS_RBG_EXT.1 specifies the random bit generation used by IPsec.

Table 11: SFR mappings of non-PP2600.1 SFRs and the ST (in the ST, but not required by or hierarchical to SFRs in PP2600.1)

2.1.2 SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions ([PP2600.1-DSR])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-DSR] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1	FDP_ACC.1-cac	X		See rationale for FDP_ACC.1(a).
FDP_ACF.1	FDP_ACF.1-cac	X		See rationale for FDP_ACF.1(a).

Table 12: SFR mappings between 2600.1-DSR and the ST

2.1.3 SFR Package for Hardcopy Device Print Functions ([PP2600.1-PRT])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-PRT] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FDP_ACC.1	FDP_ACC.1-cac	X		See rationale for FDP_ACC.1(a).
FDP_ACF.1	FDP_ACF.1-cac	X		See rationale for FDP_ACF.1(a).

Table 13: SFR mappings between 2600.1-PRT and the ST

2.1.4 SFR Package for Hardcopy Device Shared-medium Interface Functions ([PP2600.1-SMI])

The following table shows how the SFRs in this SFR package map to the SFRs in the Security Target.

[PP2600.1-SMI] SFR	Maps to ST SFR(s)	Iteration	Hierarchical substitution	Rationale
FAU_GEN.1	FAU_GEN.1			The ST's FAU_GEN.1 combines the contents of FAU_GEN.1 from the common [PP2600.1] and FAU_GEN.1 from the [PP2600.1] SMI SFR package.
FPT_FDI_EXP.1	FPT_FDI_EXP.1			n/a
FTP_ITC.1	FTP_ITC.1			n/a

Table 14: SFR mappings between 2600.1-SMI and the ST

3 Security Problem Definition

3.1 Introduction

The statement of TOE security environment describes the security aspects of the environment in which the TOE is intended to be used and the manner in which it is expected to be deployed.

To this end, the statement of TOE security environment identifies the list of assumptions made on the Operational Environment (including physical and procedural measures) and the intended method of use of the product, defines the threats that the product is designed to counter, and the organizational security policies with which the product is designed to comply.

3.2 Threat Environment

This security problem definition addresses threats posed by four categories of threat agents:

- a) Persons who are not permitted to use the TOE who may attempt to use the TOE.
- b) Persons who are authorized to use the TOE who may attempt to use TOE functions for which they are not authorized.
- c) Persons who are authorized to use the TOE who may attempt to access data in ways for which they not authorized.
- d) Persons who unintentionally cause a software malfunction that may expose the TOE to unanticipated threats.

The threats and policies defined in this Security Target address the threats posed by these threat agents.

The threat agents are assumed to originate from a well-managed user community in a non-hostile working environment. Therefore, the product protects against threats of security vulnerabilities that might be exploited in the intended environment for the TOE with low level of expertise and effort. The TOE protects against straightforward or intentional breach of TOE security by attackers possessing a Basic attack potential.

3.2.1 Threats countered by the TOE

T.DOC.DIS

User Document Data may be disclosed to unauthorized persons.

T.DOC.ALT

User Document Data may be altered by unauthorized persons.

T.FUNC.ALT

User Function Data may be altered by unauthorized persons.

T.PROT.ALT

TSF Protected Data may be altered by unauthorized persons.

T.CONF.DIS

TSF Confidential Data may be disclosed to unauthorized persons.

T.CONF.ALT

TSF Confidential Data may be altered by unauthorized persons.

3.3 Assumptions

3.3.1 Environment of use of the TOE

3.3.1.1 Physical

A.ACCESS.MANAGED

The TOE is located in a restricted or monitored environment that provides protection from unmanaged access to the physical components and data interfaces of the TOE.

A.ADMIN.PC.SECURE

The administrative computer is in a physically secured and managed environment and only the authorized administrator has access to it.

A.USER.PC.POLICY

User computers are configured and used in conformance with the organization's security policies.

3.3.1.2 Personnel

A.USER.TRAINING

TOE Users are aware of the security policies and procedures of their organization, and are trained and competent to follow those policies and procedures.

A.ADMIN.TRAINING

Administrators are aware of the security policies and procedures of their organization, are trained and competent to follow the manufacturer's guidance and documentation, and correctly configure and operate the TOE in accordance with those policies and procedures.

A.ADMIN.TRUST

Administrators do not use their privileged access rights for malicious purposes.

3.3.1.3 Connectivity

A.SERVICES.RELIABLE

When the TOE uses any of the network services DNS, Kerberos, LDAP, NTP, SMTP, syslog, and/or WINS, these services provide reliable information and responses to the TOE.

A.EMAILS.PROTECTED

For emails received by the SMTP gateway from the TOE, the transmission of emails between the SMTP gateway and the email's destination is protected.

3.4 Organizational Security Policies

3.4.1 Included in the PP2600.1 protection profile

P.USER.AUTHORIZATION

To preserve operational accountability and security, Users will be authorized to use the TOE only as permitted by the TOE Owner.

P.SOFTWARE.VERIFICATION

To detect corruption of the executable code in the TSF, procedures will exist to self-verify executable code in the TSF.

P.AUDIT.LOGGING

To preserve operational accountability and security, records that provide an audit trail of TOE use and security-relevant events will be created, maintained, and protected from unauthorized disclosure or alteration, and will be reviewed by authorized personnel.

P.INTERFACE.MANAGEMENT

To prevent unauthorized use of the external interfaces of the TOE, operation of those interfaces will be controlled by the TOE and its IT environment.

3.4.2 In addition to the PP2600.1 protection profile

P.ADMIN.PASSWORD

To restrict access to administrative tasks, the Device Administrator Password will be set in the evaluated configuration so that it is required to perform security-relevant actions through the EWS and at the Control Panel.

P.USERNAME.CHARACTER_SET

To prevent ambiguous user names in the TOE's audit trail, the user names of the LDAP and Windows Sign In users must only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E).

P.REMOTE_PANEL.DISALLOWED

To preserve operational accountability and security, administrators must not use the Remote Control-Panel feature.

4 Security Objectives

4.1 Objectives for the TOE

O.AUDIT.LOGGED

The TOE shall create and maintain a log of TOE use and security-relevant events, and prevent its unauthorized disclosure or alteration.

O.CONF.NO_ALT

The TOE shall protect TSF Confidential Data from unauthorized alteration.

O.CONF.NO_DIS

The TOE shall protect TSF Confidential Data from unauthorized disclosure.

O.DOC.NO_ALT

The TOE shall protect User Document Data from unauthorized alteration.

O.DOC.NO_DIS

The TOE shall protect User Document Data from unauthorized disclosure.

O.FUNC.NO_ALT

The TOE shall protect User Function Data from unauthorized alteration.

O.INTERFACE.MANAGED

The TOE shall manage the operation of external interfaces in accordance with security policies.

O.PROT.NO_ALT

The TOE shall protect TSF Protected Data from unauthorized alteration.

O.SOFTWARE.VERIFIED

The TOE shall provide procedures to self-verify executable code in the TSF.

O.USER.AUTHORIZED

The TOE shall require identification and authentication of Users, and shall ensure that Users are authorized in accordance with security policies before allowing them to use the TOE.

4.2 Objectives for the Operational Environment

OE.ADMIN.PC.SECURE

The TOE Owner shall locate the Administrative Computer in a physically secured and managed environment and allow only authorized personnel access to it.

OE.ADMIN.TRAINED

The TOE Owner shall ensure that TOE Administrators are aware of the security policies and procedures of their organization; have the training, competence, and time to follow the manufacturer's guidance and documentation; and correctly configure and operate the TOE in accordance with those policies and procedures.

OE.ADMIN.TRUSTED

The TOE Owner shall establish trust that TOE Administrators will not use their privileged access rights for malicious purposes.

OE.AUDIT.REVIEWED

The TOE Owner shall ensure that audit logs are reviewed at appropriate intervals for security violations or unusual patterns of activity.

OE.AUDIT_ACCESS.AUTHORIZED

If audit records generated by the TOE are exported from the TOE to another trusted IT product, the TOE Owner shall ensure that those records can be accessed in order to detect potential security violations, and only by authorized persons.

OE.AUDIT_STORAGE.PROTECTED

If audit records are exported from the TOE to another trusted IT product, the TOE Owner shall ensure that those records are protected from unauthorized access, deletion and modifications.

OE.INTERFACE.MANAGED

The IT environment shall provide protection from unmanaged access to TOE external interfaces.

OE.PHYSICAL.MANAGED

The TOE shall be placed in a secure or monitored area that provides protection from unmanaged physical access to the TOE.

OE.SERVICES.RELIABLE

When the TOE uses any of the network services DNS, Kerberos, LDAP, NTP, SMTP, syslog, and/or WINS, these services shall provide reliable information and responses to the TOE.

OE.EMAILS.PROTECTED

The IT environment shall protect the transmission of emails from the SMTP gateway to the email's destination.

OE.USER.AUTHORIZED

The TOE Owner shall grant permission to Users to be authorized to use the TOE according to the security policies and procedures of their organization.

OE.USER.PC.POLICY

The TOE Owner shall create a set of security policies to which user computers will conform.

OE.USER.TRAINED

The TOE Owner shall ensure that Users are aware of the security policies and procedures of their organization, and have the training and competence to follow those policies and procedures.

OE.USERNAME.CHARACTER_SET

The user names of all LDAP and Windows Sign In method users shall only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E).

4.3 Security Objectives Rationale

4.3.1 Coverage

The following table provides a mapping of TOE objectives to threats and policies, showing that each objective counters or enforces at least one threat or policy, respectively.

Objective	Threats / OSPs
O.AUDIT.LOGGED	P.AUDIT.LOGGING

Objective	Threats / OSPs
O.CONF.NO_ALT	T.CONF.ALT
O.CONF.NO_DIS	T.CONF.DIS
O.DOC.NO_ALT	T.DOC.ALT
O.DOC.NO_DIS	T.DOC.DIS
O.FUNC.NO_ALT	T.FUNC.ALT
O.INTERFACE.MANAGED	P.INTERFACE.MANAGEMENT
O.PROT.NO_ALT	T.PROT.ALT
O.SOFTWARE.VERIFIED	P.SOFTWARE.VERIFICATION
O.USER.AUTHORIZED	T.DOC.DIS T.DOC.ALT T.FUNC.ALT T.PROT.ALT T.CONF.DIS T.CONF.ALT P.USER.AUTHORIZATION

Table 15: Mapping of security objectives to threats and policies

The following table provides a mapping of the objectives for the Operational Environment to assumptions, threats and policies, showing that each objective holds, counters or enforces at least one assumption, threat or policy, respectively.

Objective	Assumptions / Threats / OSPs
OE.ADMIN.PC.SECURE	A.ADMIN.PC.SECURE
OE.ADMIN.TRAINED	A.ADMIN.TRAINING P.ADMIN.PASSWORD P.REMOTE_PANEL.DISALLOWED
OE.ADMIN.TRUSTED	A.ADMIN.TRUST
OE.AUDIT.REVIEWED	P.AUDIT.LOGGING
OE.AUDIT_ACCESS.AUTHORIZED	P.AUDIT.LOGGING
OE.AUDIT_STORAGE.PROTECTED	P.AUDIT.LOGGING
OE.INTERFACE.MANAGED	P.INTERFACE.MANAGEMENT

Objective	Assumptions / Threats / OSPs
OE.PHYSICAL.MANAGED	A.ACCESS.MANAGED
OE.SERVICES.RELIABLE	A.SERVICES.RELIABLE
OE.EMAILS.PROTECTED	A.EMAILS.PROTECTED
OE.USER.AUTHORIZED	T.DOC.DIS T.DOC.ALT T.FUNC.ALT T.PROT.ALT T.CONF.DIS T.CONF.ALT P.USER.AUTHORIZATION
OE.USER.PC.POLICY	A.USER.PC.POLICY
OE.USER.TRAINED	A.USER.TRAINING
OE.USERNAME.CHARACTER_SET	P.USERNAME.CHARACTER_SET

Table 16: Mapping of security objectives for the Operational Environment to assumptions, threats and policies

4.3.2 Sufficiency

The following rationale provides justification that the security objectives are suitable to counter each individual threat and that each security objective tracing back to a threat, when achieved, actually contributes to the removal, diminishing or mitigation of that threat:

Threat	Rationale for security objectives
T.DOC.DIS	<p>The threat:</p> <ul style="list-style-type: none"> User Document Data may be disclosed to unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> O.DOC.NO_DIS which protects D.DOC from unauthorized disclosure. O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.DOC.ALT	<p>The threat:</p> <ul style="list-style-type: none"> User Document Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> O.DOC.NO_ALT which protects D.DOC from unauthorized alteration.

Threat	Rationale for security objectives
	<ul style="list-style-type: none"> • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.FUNC.ALT	<p>The threat:</p> <ul style="list-style-type: none"> • User Function Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.FUNC.NO_ALT which protects D.FUNC from unauthorized alteration. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.PROT.ALT	<p>The threat:</p> <ul style="list-style-type: none"> • TSF Protected Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.PROT.NO_ALT which protects D.PROT from unauthorized alteration. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.CONF.DIS	<p>The threat:</p> <ul style="list-style-type: none"> • TSF Confidential Data may be disclosed to unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.CONF.NO_DIS which protects D.CONF from unauthorized disclosure. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
T.CONF.ALT	<p>The threat:</p> <ul style="list-style-type: none"> • TSF Confidential Data may be altered by unauthorized persons. <p>is countered by:</p> <ul style="list-style-type: none"> • O.CONF.NO_ALT which protects D.CONF from unauthorized alteration. • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.

Table 17: Sufficiency of objectives countering threats

The following rationale provides justification that the security objectives for the environment are suitable to cover each individual assumption, that each security objective for the environment that traces back to an assumption about the environment of use of the TOE, when achieved, actually contributes to the environment achieving consistency with the assumption, and that if all security objectives for the environment that trace back to an assumption are achieved, the intended usage is supported:

Assumption	Rationale for security objectives
A.ACCESS.MANAGED	<p>The assumption:</p> <ul style="list-style-type: none"> The TOE is located in a restricted or monitored environment that provides protection from unmanaged access to the physical components and data interfaces of the TOE. <p>is upheld by:</p> <ul style="list-style-type: none"> OE.PHYSICAL.MANAGED which establishes a protected physical environment for the TOE.
A.ADMIN.PC.SECURE	<p>The assumption:</p> <ul style="list-style-type: none"> The administrative computer is in a physically secured and managed environment and only the authorized administrator has access to it. <p>is upheld by:</p> <ul style="list-style-type: none"> OE.ADMIN.PC.SECURE which establishes the responsibility of the TOE owner to locate the administrative computer in a physically secured and managed environment and allow only authorized personnel access.
A.USER.PC.POLICY	<p>The assumption:</p> <ul style="list-style-type: none"> User computers are configured and used in conformance with the organization's security policies. <p>is upheld by:</p> <ul style="list-style-type: none"> OE.USER.PC.POLICY which establishes the responsibility of the TOE owner to create a set of security policies to which user computers will conform.
A.USER.TRAINING	<p>The assumption:</p> <ul style="list-style-type: none"> TOE Users are aware of the security policies and procedures of their organization, and are trained and competent to follow those policies and procedures. <p>is upheld by:</p> <ul style="list-style-type: none"> OE.USER.TRAINED which establishes responsibility of the TOE Owner to provide appropriate User training.
A.ADMIN.TRAINING	<p>The assumption:</p> <ul style="list-style-type: none"> Administrators are aware of the security policies and procedures of their organization, are trained and competent to follow the manufacturer's guidance and documentation, and correctly configure

Assumption	Rationale for security objectives
	<p>and operate the TOE in accordance with those policies and procedures.</p> <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.ADMIN.TRAINED which establishes responsibility of the TOE Owner to provide appropriate Administrator training.
A.ADMIN.TRUST	<p>The assumption:</p> <ul style="list-style-type: none"> • Administrators do not use their privileged access rights for malicious purposes. <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.ADMIN.TRUSTED which establishes responsibility of the TOE Owner to have a trusted relationship with Administrators.
A.SERVICES.RELIABLE	<p>The assumption:</p> <ul style="list-style-type: none"> • When the TOE uses any of the network services DNS, Kerberos, LDAP, NTP SMTP, syslog, and/or WINS, these services provide reliable information and responses to the TOE. <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.SERVICES.RELIABLE which, when the TOE uses the network services DNS, Kerberos, LDAP, NTP, SMTP, syslog, and/or WINS, establishes that these services provide reliable information and responses to the TOE.
A.EMAILS.PROTECTED	<p>The assumption:</p> <ul style="list-style-type: none"> • For emails received by the SMTP gateway from the TOE, the transmission of emails between the SMTP gateway and the email's destination is protected. <p>is upheld by:</p> <ul style="list-style-type: none"> • OE.EMAILS.PROTECTED which protects the transmission of emails from the SMTP gateway to the email's destination

Table 18: Sufficiency of objectives holding assumptions

The following rationale provides justification that the security objectives are suitable to cover each individual organizational security policy, that each security objective that traces back to an OSP, when achieved, actually contributes to the implementation of the OSP, and that if all security objectives that trace back to an OSP are achieved, the OSP is implemented:

OSP	Rationale for security objectives
P.USER.AUTHORIZATION	<p>The OSP:</p> <ul style="list-style-type: none"> • To preserve operational accountability and security, Users will be authorized to use the TOE only as permitted by the TOE Owner.

OSP	Rationale for security objectives
	<p>is enforced by:</p> <ul style="list-style-type: none"> • O.USER.AUTHORIZED which establishes user identification and authentication as the basis for authorization to use the TOE. • OE.USER.AUTHORIZED which establishes responsibility of the TOE Owner to appropriately grant authorization.
<p>P.SOFTWARE.VERIFICATION</p>	<p>The OSP:</p> <ul style="list-style-type: none"> • To detect corruption of the executable code in the TSF, procedures will exist to self-verify executable code in the TSF. <p>is enforced by:</p> <ul style="list-style-type: none"> • O.SOFTWARE.VERIFIED which provides procedures to self-verify executable code in the TSF.
<p>P.AUDIT.LOGGING</p>	<p>The OSP:</p> <ul style="list-style-type: none"> • To preserve operational accountability and security, records that provide an audit trail of TOE use and security-relevant events will be created, maintained, and protected from unauthorized disclosure or alteration, and will be reviewed by authorized personnel. <p>is enforced by:</p> <ul style="list-style-type: none"> • O.AUDIT.LOGGED which creates and maintains a log of TOE use and security-relevant events, and prevents unauthorized disclosure or alteration. • OE.AUDIT_STORAGE.PROTECTED which protects exported audit records from unauthorized access, deletion and modifications. • OE.AUDIT_ACCESS.AUTHORIZED which establishes responsibility of the TOE Owner to provide appropriate access to exported audit records. • OE.AUDIT.REVIEWED which establishes responsibility of the TOE Owner to ensure that audit logs are appropriately reviewed.
<p>P.INTERFACE.MANAGEMENT</p>	<p>The OSP:</p> <ul style="list-style-type: none"> • To prevent unauthorized use of the external interfaces of the TOE, operation of those interfaces will be controlled by the TOE and its IT environment. <p>is enforced by:</p> <ul style="list-style-type: none"> • O.INTERFACE.MANAGED which manages the operation of external interfaces in accordance with security policies.

OSP	Rationale for security objectives
	<ul style="list-style-type: none"> • OE.INTERFACE.MANAGED which establishes a protected environment for TOE external interfaces.
P.ADMIN.PASSWORD	<p>The OSP:</p> <ul style="list-style-type: none"> • To restrict access to administrative tasks, the Device Administrator Password will be set in the evaluated configuration so that it is required to perform security-relevant actions through EWS (HTTP) and at the Control Panel. <p>is enforced by:</p> <ul style="list-style-type: none"> • OE.ADMIN.TRAINED which establishes responsibility of the TOE Owner to provide appropriate Administrator training.
P.USERNAME.CHARACTER_SET	<p>The OSP:</p> <ul style="list-style-type: none"> • To prevent ambiguous user names in the TOE's audit trail, the user names of the LDAP and Windows Sign In method users must only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E). <p>is enforced by:</p> <ul style="list-style-type: none"> • OE.USERNAME.CHARACTER_SET which establishes that the user names of all LDAP and Windows Sign In methods users shall only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E).
P.REMOTE_PANEL.DISALLOWED	<p>The OSP:</p> <ul style="list-style-type: none"> • To preserve operational accountability and security, administrators must not use the Remote Control-Panel feature. <p>is enforced by:</p> <ul style="list-style-type: none"> • OE.ADMIN_TRAINED which establishes responsibility of the TOE Owner to provide appropriate Administrator training.

Table 19: Sufficiency of objectives enforcing Organizational Security Policies

5 Extended Components Definition

This section contains the extended component definition(s) used by this ST.

5.1 Class FPT: Protection of the TSF

This section describes the functional requirements for the restrictions of forwarding of data to external interfaces. This extended component is defined in [PP2600.1] Section 9.2.

5.1.1 Restricted forwarding of data to external interfaces (FDI)

Family behaviour

This family defines requirements for the TSF to restrict direct forwarding of information from one external interface to another external interface.

Many products receive information on specific external interfaces and are intended to transform and process this information before it is transmitted on another external interface. However, some products may provide the capability for attackers to misuse external interfaces to violate the security of the TOE or devices that are connected to the TOE's external interfaces. Therefore, direct forwarding of unprocessed data between different external interfaces is forbidden unless explicitly allowed by an authorized administrative role. The family FPT_FDI_EXP has been defined to specify this kind of functionality.

Component levelling

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces provides for the functionality to require TSF controlled processing of data received over defined external interfaces before these data are sent out on another external interface. Direct forwarding of data from one external interface to another one requires explicit allowance by an authorized administrative role.

Management: FPT_FDI_EXP.1

There are no management activities foreseen.

Audit: FPT_FDI_EXP.1

There are no audit events foreseen.

5.1.1.1 FPT_FDI_EXP.1 - Restricted forwarding of data to external interfaces

Hierarchical to: No other components.

Dependencies: FMT_SMF.1 Specification of Management Functions
FMT_SMR.1 Security roles

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on [assignment: *list of external interfaces*] from being forwarded without further processing by the TSF to [assignment: *list of external interfaces*].

5.2 Class FCS: Cryptographic support

5.2.1 Cryptographic Operation (Random Bit Generation) (FCS_RBG)

Family behaviour

This family defines requirements for random bit generation to ensure that it is performed in accordance with selected standards and seeded by an entropy source.

Component levelling

FCS_RBG_EXT.1 Random Bit Generation requires random bit generation to be performed in accordance with selected standards and seeded by an entropy source.

Management: FCS_RBG_EXT.1

There are no management activities foreseen.

Audit: FCS_RBG_EXT.1

There are no audit events foreseen.

5.2.1.1 FCS_RBG_EXT.1 – Random Bit Generation

Hierarchical to: No other components.

Dependencies: No dependencies.

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with NIST SP 800-90A using [selection: **Hash_DRBG(any), HMAC_DRBG(any), CTR_DRBG(AES)**].

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by an entropy source that accumulates entropy from software-based noise sources with a minimum of [selection: **128 bits, 256 bits**] of entropy at least equal to the greatest security strength, according to NIST SP 800-57, of the keys and hashes that it will generate.

Rationale

Random bits/number will be used by the SFRs for key generation and destruction, and the Common Criteria does not provide a suitable SFR for the random bit generation.

This extended component ensures the strength of encryption keys, and it is therefore placed in the FCS class with a single component.

6 Security Requirements

6.1 TOE Security Functional Requirements

The following table shows the security functional requirements for the TOE, and the operations performed on the components according to CC part 2: iteration (Iter.), refinement (Ref.), assignment (Ass.) and selection (Sel.).

Security functional group	Security functional requirement	Base security functional component	Source	Operations			
				Iter.	Ref.	Ass.	Sel.
FAU - Security audit	FAU_GEN.1 Audit data generation		PP2600.1	No	No	Yes	Yes
	FAU_GEN.2 User identity association		PP2600.1	No	No	No	No

Security functional group	Security functional requirement	Base security functional component	Source	Operations			
				Iter.	Ref.	Ass.	Sel.
FCS - Cryptographic support	FCS_CKM.1-ipsec Cryptographic key generation		CC Part 2	Yes	Yes	Yes	No
	FCS_CKM.1-job Cryptographic key generation	FCS_CKM.1	CC Part 2	Yes	No	Yes	No
	FCS_CKM.2 Cryptographic key establishment		CC Part 2	No	Yes	Yes	No
	FCS_COP.1-ipsec Cryptographic operation	FCS_COP.1	CC Part 2	Yes	Yes	Yes	No
	FCS_COP.1-job Cryptographic operation	FCS_COP.1	CC Part 2	Yes	No	Yes	No
	FCS_RBG_EXT.1 Random Bit Generation		ECD	No	Yes	No	Yes
FDP - User data protection	FDP_ACC.1-cac Common access control SFP	FDP_ACC.1	PP2600.1	Yes	No	Yes	No
	FDP_ACC.1-tfac TOE function access control SFP	FDP_ACC.1	PP2600.1	Yes	No	Yes	No
	FDP_ACF.1-cac Common access control functions	FDP_ACF.1	PP2600.1	Yes	No	Yes	No
	FDP_ACF.1-tfac TOE function access control functions	FDP_ACF.1	PP2600.1	Yes	No	Yes	No
	FDP_RIP.1 Subset residual information protection		PP2600.1	No	No	Yes	Yes
	FIA_AFL.1 Authentication failure handling		CC Part 2	No	No	Yes	Yes

Security functional group	Security functional requirement	Base security functional component	Source	Operations			
				Iter.	Ref.	Ass.	Sel.
FIA - Identification and authentication	FIA_ATD.1 Local user attribute definition		PP2600.1	No	No	Yes	No
	FIA_SOS.1 Verification of secrets		CC Part 2	No	No	Yes	No
	FIA_UAU.1 Timing of Control Panel authentication		PP2600.1	No	Yes	Yes	No
	FIA_UAU.2 IPsec authentication before any action		CC Part 2	No	Yes	No	No
	FIA_UAU.7 Control Panel protected authentication feedback		CC Part 2	No	Yes	Yes	No
	FIA_UID.1 Timing of Control Panel identification		PP2600.1	No	Yes	Yes	No
	FIA_UID.2 IPsec identification before any action		CC Part 2	No	Yes	No	No
	FIA_USB.1 User-subject binding		PP2600.1	No	Yes	Yes	No
FMT - Security management	FMT_MOF.1 Management of authentication security functions behavior	FMT_MOF.1	CC Part 2	Yes	No	Yes	Yes
	FMT_MSA.1 Management of security attributes	FMT_MSA.1	PP2600.1	Yes	No	Yes	Yes
	FMT_MTD.1 Management of TSF data	FMT_MTD.1	PP2600.1	Yes	No	Yes	Yes
	FMT_SMF.1 Specification of management functions		PP2600.1	No	No	Yes	No

Security functional group	Security functional requirement	Base security functional component	Source	Operations			
				Iter.	Ref.	Ass.	Sel.
	FMT_SMR.1 Security roles		PP2600.1	No	No	Yes	No
FPT - Protection of the TSF	FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces		PP2600.1-SMI	No	No	Yes	No
	FPT_STM.1 Reliable time stamps		PP2600.1	No	No	No	No
	FPT_TST.1 TSF testing		PP2600.1	No	No	Yes	Yes
FTA - TOE access	FTA_SSL.3 Control Panel TSF-initiated termination		PP2600.1	No	Yes	Yes	No
FTP - Trusted path/channels	FTP_ITC.1 Inter-TSF trusted channel		PP2600.1-SMI	No	Yes	Yes	Yes

Table 20: Security functional requirements for the TOE

6.1.1 Security audit (FAU)

6.1.1.1 Audit data generation (FAU_GEN.1)

FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:

- a) Start-up and shutdown of the audit functions; and
- b) All auditable events for the **not specified** level of audit; and
- c) **All Auditable Events as each is defined for its Audit Level (if one is specified) for the Relevant SFR in Table 21: Auditable Events; none.**

FAU_GEN.1.2 The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, **for each Relevant SFR listed in Table 21: Auditable Events: (1) information as defined by its Audit Level (if one is specified), and (2) all Additional Information (if any is required); none.**

Auditable event	Relevant SFR(s)	Audit level	Additional information	[PP2600.1]
Job completion	FDP_ACC.1-tfac	Not specified	Type of job	Yes: Common

Both successful and unsuccessful use of the authentication mechanism	FIA_UAU.1, FIA_UAU.2	Basic	None required	Yes: Common
Both successful and unsuccessful use of the identification mechanism	FIA_UID.1, FIA_UID.2	Basic	Attempted user identity, if available	Yes: Common
Use of the management functions	FMT_SMF.1	Minimum	None required	Yes: Common
Modifications to the group of users that are part of a role	FMT_SMR.1	Minimum	None required	Yes: Common
Changes to the time	FPT_STM.1	Minimum	None required	Yes: Common
Failure of the trusted channel functions	FTP_ITC.1	Minimum	None required	Yes: SMI
Termination of an interactive session by the session termination mechanism	FTA_SSL.3	Minimum	None required	No

Table 21: Auditable events

6.1.1.2 User identity association (FAU_GEN.2)

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

6.1.2 Cryptographic support (FCS)

6.1.2.1 Cryptographic key generation (FCS_CKM.1-ipsec)

FCS_CKM.1.1 The *QuickSec cryptographic library in the Operational Environment* TSF shall generate *asymmetric* cryptographic keys in accordance with a specified cryptographic key generation algorithm **defined in Table 22** and specified cryptographic key sizes **defined in Table 22** that meet the following: **the standards defined in Table 22**.

Protocol	Key generation algorithm	Key sizes	Standards
IPsec	DSA	2048-bit, 3072-bit, 4096-bit, 6144-bit, 8192-bit	[FIPS186-2] Finite Field Cryptography (FFC) “Digital Signature Standard (DSS)”

Table 22: Asymmetric cryptographic key generation

Application Note: *Random bit generation for FCS_CKM.1-ipsec is implemented by FCS_RBG_EXT.1.*

Application Note: *The asymmetric keys generated by the DSA algorithm are used by the key establishment algorithms specified in FCS_CKM.2.*

6.1.2.2 Cryptographic key generation (FCS_CKM.1-job)

FCS_CKM.1.1 The TSF shall generate cryptographic keys in accordance with a specific cryptographic key generation algorithm [Password-Based Key Derivation Function 2 (PBKDF2) with HMAC-SHA-256] and specified cryptographic key sizes [256 bit] that meet the following: [PKCS5v2.1]

Application Note: *PBKDF2 is used to derive a key from a Job Encryption Password to unlock an encrypted stored print job.*

6.1.2.3 Cryptographic key establishment (FCS_CKM.2)

FCS_CKM.2.1 The QuickSec cryptographic library in the Operational Environment TSF shall perform cryptographic key establishment distribute cryptographic keys in accordance with a specified cryptographic key establishment distribution method defined in Table 23 that meets the following: the standards defined in Table 23.

Protocol	Key establishment method	Standards
IPsec	IKEv1 (DH)	[RFC4109] Algorithms for Internet Key Exchange version 1 (IKEv1) [RFC4894] Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec
	IKEv2 (DH)	[RFC4306] Diffie-Hellman key agreement method defined for the IKEv2 protocol; [RFC4718] IKEv2 Clarifications and Implementation Guidelines [RFC4894] Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec

Table 23: Cryptographic key establishment

6.1.2.4 Cryptographic operation (FCS_COP.1-ipsec)

FCS_COP.1.1 The *QuickSec cryptographic library in the Operational Environment TSF* shall perform the operations defined in **Table 24** in accordance with a specified cryptographic algorithm defined in **Table 24** and cryptographic key sizes defined in **Table 24** that meet the following: the standards defined in **Table 24**.

Protocol	Operations	Algorithm	Key sizes (in bits)	Standards	
IPsec	Signature generation and verification	RSA	2048, 3072	[PKCS1v1.5] Public-Key Cryptography Standard (PKCS) #1 v1.5: RSA Encryption Standard	
	Symmetric encryption and decryption	AES	CBC: 128, 192, 256; ECB: 256	[FIPS197] Advanced Encryption Standard; [SP800-38A] Recommendation for Block Cipher Modes of Operation: Methods and Techniques	
	Secure hash	SHA-1, SHA-256, SHA-384, SHA-512		[FIPS180-4] Secure Hash Standard (SHS); [RFC4894] Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec	
	Data authentication	HMAC-SHA1-96		160	[RFC2104] HMAC: Keyed-Hashing for Message Authentication; [RFC2404] Use of HMAC-SHA1-96 within ESP and AH
				256	[RFC2104] HMAC: Keyed-Hashing for Message Authentication;
				384	[RFC4868] Using HMAC-SHA-256, HMAC-SHA-384, and HMAC-SHA-512 with IPsec
				512	

Table 24: Cryptographic operations for IPsec

6.1.2.5 Cryptographic operation (FCS_COP.1-job)

FCS_COP.1.1 The TSF shall perform the operations defined in **Table 25** in accordance with a specified cryptographic algorithm defined in **Table 25** and cryptographic key sizes defined in **Table 25** that meet the following: the standards defined in **Table 25**.

Protocol	Operations	Algorithm	Key sizes (in bits)	Standards
Print job	Symmetric decryption	AES (CBC mode)	256	[FIPS197] Advanced Encryption Standard; [SP800-38A] Recommendation for Block Cipher Modes of Operation

Table 25: Cryptographic operations

6.1.2.6 Random Bit Generation (FCS_RBG_EXT.1)

FCS_RBG_EXT.1.1 The *QuickSec cryptographic library in the Operational Environment* TSF shall perform all deterministic random bit generation services in accordance with NIST SP 800-90A using **CTR_DRBG(AES)**.

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by an entropy source that accumulates entropy from software-based noise sources with a minimum of **256 bits** of entropy at least equal to the greatest security strength, according to NIST SP 800-57, of the keys and hashes that it will generate.

6.1.3 User data protection (FDP)

6.1.3.1 Common access control SFP (FDP_ACC.1-cac)

FDP_ACC.1.1 The TSF shall enforce the **Common Access Control SFP in Table 26** on the list of users as subjects, objects, and operations among subjects and objects covered by the **Common Access Control SFP in Table 26**.

Object	Operation(s)	Subject	Access control rules	[PP2600.1] section
D.FUNC	Modify, Delete	U.NORMAL	For stored print jobs in Job Storage with the Job PIN attribute set: From the Control Panel, subjects must be the job owner or know the Job PIN or have the appropriate Job Storage permission in their Permission Set to delete the job; otherwise, delete access is denied. D.FUNC for Stored Jobs cannot be modified by any user, including U.ADMINISTRATOR. For encrypted stored print jobs in Job Storage: From the Control Panel, subjects must know the job's Job Encryption Password or have the appropriate Job Storage permission in their Permission Set to delete D.FUNC; otherwise, delete access is denied.	Common

D.DOC	Delete	U.NORMAL	<p>For stored print jobs in Job Storage with the Job PIN attribute set: From the Control Panel, subjects must be the job owner or know the Job PIN or have the appropriate Job Storage permission in their Permission Set to delete the job; otherwise, delete access is denied.</p> <p>For encrypted stored print jobs in Job Storage: From the Control Panel, subjects must know the job's Job Encryption Password or have the appropriate Job Storage permission in their Permission Set to delete D.DOC; otherwise, delete access is denied.</p>	Common
D.DOC+DSR D.DOC+PRT	Read	U.NORMAL	<p>For stored print jobs in Job Storage with the Job PIN attribute set: Subjects must be the job owner or know the Job PIN to read the object; otherwise, read access is denied.</p> <p>For encrypted stored print jobs in Job Storage: Subjects must know the job's Job Encryption Password to read the object, otherwise, read access is denied.</p>	DSR, PRT

Table 26: Common Access Control SFP

6.1.3.2 TOE function access control SFP (FDP_ACC.1-tfac)

FDP_ACC.1.1 The TSF shall enforce the **TOE Function Access Control SFP** on **users as subjects, TOE functions as objects, and the right to use the functions as operations.**

6.1.3.3 Common access control functions (FDP_ACF.1-cac)

FDP_ACF.1.1 The TSF shall enforce the **Common Access Control SFP** in **Table 26: Common Access Control SFP** to objects based on the following: **the list of users as subjects and objects controlled under the Common Access Control SFP in Table 26: Common Access Control SFP, and for each, the indicated security attributes in Table 26: Common Access Control SFP .**

FDP_ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: **rules specified in the Common Access Control SFP in Table 26: Common Access Control SFP governing access among controlled users as subjects and controlled objects using controlled operations on controlled objects.**

FDP_ACF.1.3 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules:

- **U.ADMINISTRATOR can delete any D.DOC without providing a Job PIN or Job Encryption Password.**

FDP_ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional rules: **none**.

6.1.3.4 TOE function access control functions (FDP_ACF.1-tfac)

FDP_ACF.1.1 The TSF shall enforce the **TOE Function Access Control SFP** to objects based on the following: **users and the following TOE functions and security attributes**:

- **Users: Control Panel users;**
Functions: F.PRT, F.DSR, F.SMI;
Security attributes:
 - **User Role as defined by the user's Permission Set**
 - **Association of a sign in method to a Control Panel application**
- **Users: Network Client Computers, Administrative Computer;**
Functions: F.DSR, F.PRT, F.SMI;
Security attributes:
 - **User Role as defined by the user's IPsec/Firewall service templates.**

Application Note: *The "Allow users to choose alternate sign-in methods at the product control panel" function affects the sign in processing behavior of Control Panel users, but is considered a function instead of a security attribute and, thus, not listed under "security attributes" above.*

FDP_ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed:

- **The user is explicitly authorized by U.ADMINISTRATOR to use a function**
- **A Network Client Computer that is authorized to use the TOE is automatically authorized to use the functions F.DSR, F.PRT, F.SMI.**

FDP_ACF.1.3 The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: **the user acts in the role U.ADMINISTRATOR, none**.

FDP_ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional rules: **none**.

6.1.3.5 Subset residual information protection (FDP_RIP.1)

FDP_RIP.1.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the **deallocation of the resource from** the following objects: **D.DOC**.

6.1.4 Identification and authentication (FIA)

6.1.4.1 Local sign-in method authentication failure handling (FIA_AFL.1)

FIA_AFL.1.1 The TSF shall detect when **an administrator configurable positive integer within 3 to 10** unsuccessful authentication attempts occur related to **the last successful authentication for the indicated user identity for the following interfaces**

- **Control Panel**
 - **Local Device Sign In**

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been **met**, the TSF shall **lock the account**.

Application Note: *Multiple unsuccessful authentication attempts using the same authentication data are counted as just one unsuccessful authentication attempt by the sign in method.*

6.1.4.2 Local user attribute definition (FIA_ATD.1)

FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users:

- **Control Panel users:**
 - **Local Device Sign In (Local Administrator account only)**
 - **User Identifier: Display name**
 - **User Role: Permission set**
 - **Windows Sign In**
 - **User Role: Permission set**
 - **LDAP Sign In**
 - **User Role: Permission set**
- **IPsec users:**
 - **User Identifier: IP address**
 - **User Role: IPsec/Firewall service template**

Application Note: *The LDAP and Windows Sign In method security attributes belonging to individual users are not in FIA_ATD.1 because these attributes are "maintained" independently by the LDAP server and Windows domain controller, respectively, which are part of the Operational Environment.*

6.1.4.3 Verification of secrets (FIA_SOS.1)

FIA_SOS.1.1 The TSF shall provide a mechanism to verify that secrets meet **the requirement: Job PINs shall be 4 digits**.

6.1.4.4 Timing of Control Panel authentication (FIA_UAU.1)

- FIA_UAU.1.1** The TSF shall allow
- Viewing of help information
 - Viewing of device status information
 - Viewing of network connectivity status information
 - Viewing of system time
 - Viewing of Web Services status information
 - Viewing of Welcome screen
 - Selection of Sign In

- Selection of sign-in method from Sign In screen
- Selection of an application
- Printing of help information
- Printing of network connectivity status information
- Changing language for the session
- Resetting of session

on behalf of the *Control Panel* user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each *Control Panel* user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

6.1.4.5 IPsec authentication before any action (FIA_UAU.2)

FIA_UAU.2.1 The TSF shall require each *Network Client Computer, Administrative Computer, and trusted IT product connection* user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that *connection* user.

6.1.4.6 Control Panel protected authentication feedback (FIA_UAU.7)

FIA_UAU.7.1 The TSF shall provide only dots (“●”) to users while the *Control Panel* authentication is in progress.

Application Note: *Job PINs and Job Encryption Passwords are not used for authentication, but the digits are masked within dots (“●”) when entered.*

6.1.4.7 Timing of Control Panel identification (FIA_UID.1)

FIA_UID.1.1 The TSF shall allow

- Viewing of help information
- Viewing of device status information
- Viewing of network connectivity status information
- Viewing of system time
- Viewing of Web Services status information
- Viewing of Welcome screen
- Selection of Sign In
- Selection of sign-in method from Sign In screen
- Selection of an application
- Printing of help information
- Printing of network connectivity status information
- Changing language for the session
- Resetting of session

on behalf of the *Control Panel* user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each *Control Panel* user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

6.1.4.8 IPsec identification before any action (FIA_UID.2)

FIA_UID.2.1 The TSF shall require each *Network Client Computer, Administrative Computer, and trusted IT product connection user* to be successfully identified before allowing any other TSF-mediated actions on behalf of that *connection user*.

6.1.4.9 User-subject binding (FIA_USB.1)

FIA_USB.1.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user:

1. User Identifier

- **Control Panel users:**
 - **Local Device Sign In: Display name**
 - **Windows Sign In: Windows username**
 - **LDAP Sign In: LDAP username**
- **IPsec users:**
 - **IP address**

2. User Role

- **Control Panel users:**
 - **Local Device Sign In: Permission set**
 - **Windows Sign In: Permission set**
 - **LDAP Sign In: Permission set**
- **IPsec users:**
 - **IPsec/Firewall service template**

FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on behalf of users:

- **If "Allow users to choose alternate sign-in methods at the product control panel" is disabled, the Control Panel user's session Permission Set will be reduced to exclude the permissions of applications whose sign-in method does not match the sign-in method used by the user to sign in.**

FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes associated with the subjects acting on the behalf of users:

- **None**

6.1.5 Security management (FMT)

6.1.5.1 Management of security functions (FMT_MOF.1)

FMT_MOF.1.1 The TSF shall restrict the ability to **perform the actions defined in Table 2727** on the functions **defined in Table 2727** to **U.ADMINISTRATOR**.

Function(s)	Actions(s)	Application note
Control Panel user authorization	determine the behavior of, modify the behavior of	The “Allow users to choose alternate sign-in methods at the product control panel” function affects how the TOE authorizes control panel users. When this function is enabled, the sign-in method to application mappings are enforced during control panel user authorization.
Windows Sign In	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, at least one external authentication mechanism must be enabled.
LDAP Sign In	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, at least one external authentication mechanism must be enabled.
Account lockout for Local Administrator account	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, account lockout for the Local Administrator account must be enabled.
Inactivity Timeout for Control Panel user sign-in sessions	determine the behavior of, modify the behavior of	In the evaluated configuration, the Control Panel Inactivity Timeout must be set to value in the range of 10 – 60 seconds.
Enhanced security event logging	disable, enable	In the evaluated configuration, enhanced security event logging must be enabled.
IPsec	disable, enable, determine the behavior of, modify the behavior of	In the evaluated configuration, IPsec must be enabled.

Table 27: Management of functions

6.1.5.2 Management of security attributes (FMT_MSA.1)

FMT_MSA.1.1 The TSF shall enforce the **Common Access Control SFP in Table 26** and **TOE Function Access Control SFP** to restrict the ability to **perform the operations defined in Error! Reference source not found.28** on the security attributes **defined in Error! Reference source not found.28** to **U.ADMINISTRATOR**.

Security attributes(s)	Operation(s)	Application note
User Identifier		

Custom IPsec/Firewall address template	query, create, modify, delete	The TOE provides the capability to create custom IPsec/Firewall address templates. A custom IPsec/Firewall address template defines one or more IP addresses for which the address template is to apply.
Role		
Built-in Device Administrator permission set	query	The TOE contains a built-in Device Administrator permission set that cannot be renamed or deleted. In the evaluated configuration, U.ADMINISTRATOR users must be granted the Device Administrator permission set.
Built-in Device User permission set	query	The TOE contains a built-in Device User permission set that cannot be renamed or deleted. In the evaluated configuration, U.NORMAL users must be granted either the built-in Device User permission set or a custom permission set (if any exist).
Custom permission set	query, create, modify, delete	The TOE provides the capability to create custom permission sets. A custom permission set can be renamed or deleted. In the evaluated configuration, U.NORMAL users must be granted either the built-in Device User permission set or a custom permission set (if any exist).
Permissions associated with built-in Device Administrator permission set	query	The built-in Device Administrator permission set has all permissions enabled. The permissions associated with the Device Administrator permission set cannot be disabled.
Permissions associated with built-in Device User permission set	query, enable, disable	The permissions associated with the built-in Device User permission set can be enabled or disabled. In the evaluated configuration, the built-in Device User permission set must have all administrative permissions disabled.
Permissions associated with a custom permission set	query, enable, disable	The permissions associated with a custom permission set can be enabled or disabled. In the evaluated configuration, any custom permission sets created must have all administrative permissions disabled.

<p>Built-in IPsec/Firewall All Services template</p>	<p>query</p>	<p>The TOE contains a built-in IPsec/Firewall All Services template. The built-in IPsec/Firewall All Services template cannot be renamed or deleted.</p> <p>In the evaluated configuration, built-in IPsec/Firewall All Services template must be granted to the Administrative Computer (U.ADMINISTRATOR).</p>
<p>Custom IPsec/Firewall service template</p>	<p>query, create, delete, modify</p>	<p>The TOE provides the capability to create custom IPsec/Firewall service templates.</p> <p>In the evaluated configuration, two custom IPsec/Firewall service templates must be created:</p> <ul style="list-style-type: none"> • One custom IPsec/Firewall service template for Network Client Computers (U.NORMAL). • One custom IPsec/Firewall service template for trusted IT products.
<p>Network services associated with built-in IPsec/Firewall All Services template</p>	<p>query</p>	<p>The built-in IPsec/Firewall All Services template has all network services enabled. Network services associated with the built-in IPsec/Firewall All Services template cannot be disabled.</p>
<p>Network services associated with a custom IPsec/Firewall services template</p>	<p>query, enable, disable</p>	<p>Network services associated with a custom IPsec/Firewall services template can be enabled or disabled.</p> <p>In the evaluated configuration;</p> <ul style="list-style-type: none"> • The custom IPsec/Firewall service template for Network Client Computers (U.NORMAL) must only have the P9100 services enabled. • The custom IPsec/Firewall service template for trusted IT products must only have those network services (e.g. SMTP) required for the TOE to establish an IPsec connection with the trusted IT products to either send data to them or request data from them. The custom IPsec/Firewall service template must not contain any network services that allow trusted IT products to initiate a connection to the TOE.

Table 28: Management of security attributes

6.1.5.3 Management of TSF data (FMT_MTD.1)

FMT_MTD.1.1 The TSF shall restrict the ability to perform the operations defined in Table 2929 on the TSF Data defined in Table 2929 to U.ADMINISTRATOR.

TSF Data	Operations(s)	Application note
Device Administrator Password	query, set, modify, clear	In the evaluated configuration, the Device Administrator Password must be set. The query operation reads the status (set or not set) of the Device Administrator Password and not the value of the Device Administrator Password.
CA certificates	query, install, delete, export	<none>
Identity certificates	query, install, delete, export	In the evaluated configuration, an identity certificate with private key that is generated outside the TOE must be imported into the TOE's certificate store. The query operation does not allow reading of the private key associated with an identity certificate. If the private key associated with an identity certificate is marked as non-exportable, the export operation will export an identity certificate without its associated private key.
Network identity certificate	query, modify	The query operation does not allow reading of the private key associated with the network identity certificate.

Table 29: Management of TSF data

6.1.5.4 Specification of management functions (FMT_SMF.1)

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions:

- Management of Control Panel user authorization (FMT_MOF.1)
- Management of Windows Sign In (FMT_MOF.1)
- Management of LDAP Sign In (FMT_MOF.1)
- Management of account lockout policy for Local Administrator account (FMT_MOF.1)
- Management of Inactivity Timeout for Control Panel sign-in sessions (FMT_MOF.1)
- Management of enhanced security event logging (FMT_MOF.1)
- Management of IPsec (FMT_MOF.1)
- Management of IPsec/Firewall address templates (FMT_MSA.1)
- Management of permission sets (FMT_MSA.1)

- Management of permissions associated with permission sets (FMT_MSA.1)
- Management of IPsec/Firewall service templates (FMT_MSA.1)
- Management of Device Administrator Password (FMT_MTD.1)
- Management of CA certificates (FMT_MTD.1)
- Management of identity certificates (FMT_MTD.1)
- Management of network identity certificate (FMT_MTD.1)

6.1.5.5 Security roles (FMT_SMR.1)

FMT_SMR.1.1 The TSF shall maintain the roles **U.ADMINISTRATOR, U.NORMAL**.

FMT_SMR.1.2 The TSF shall be able to associate users with roles.

6.1.6 Protection of the TSF (FPT)

6.1.6.1 Restricted forwarding of data to external interfaces (FPT_FDI_EXP.1)

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on **any external Interface** from being forwarded without further processing by the TSF to any **Shared-medium Interface**.

6.1.6.2 Reliable time stamps (FPT_STM.1)

FPT_STM.1.1 The TSF shall be able to provide reliable time stamps.

6.1.6.3 TSF testing (FPT_TST.1)

FPT_TST.1.1 The TSF shall run a suite of self tests **at the request of the authorised user** to demonstrate the correct operation of

- **System Clock - Timestamp verification**
- **LDAP Sign In - LDAP Settings verification**
- **Windows Sign In (via Kerberos) - Windows Settings verification**

FPT_TST.1.2 The TSF shall provide authorised users with the capability to verify the integrity of

- **Device Administrator Password**
- **Windows Sign In settings**
- **LDAP Sign In settings**
- **Permission sets**
- **Permissions associated with permission sets**
- **Network user to permission set relationships**
- **Network group to permission set relationships**
- **“Allow users to choose alternate sign-in methods at the product control panel” function enable/disable setting**

FPT_TST.1.3 The TSF shall provide authorised users with the capability to verify the integrity of **stored TSF executable code**.

6.1.7 TOE access (FTA)

6.1.7.1 TSF-initiated termination of Control Panel sign-in session (FTA_SSL.3)

FTA_SSL.3.1 The TSF shall terminate an interactive *Control Panel sign-in* session after a **administrator-configurable amount of user inactivity**.

6.1.8 Trusted path/channels (FTP)

6.1.8.1 Inter-TSF trusted channel (FTP_ITC.1)

FTP_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the ~~channel~~ *communicated* data from modification or disclosure.

FTP_ITC.1.2 The TSF shall permit **the TSF, another trusted IT product** to initiate communication via the trusted channel.

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for **communication of D.DOC, D.FUNC, D.PROT, and D.CONF over any Shared-medium Interface**.

6.2 Security Functional Requirements Rationale

6.2.1 Coverage

The following table provides a mapping of SFR to the security objectives, showing that each security functional requirement addresses at least one security objective.

Security functional requirements	Objectives
FAU_GEN.1	O.AUDIT.LOGGED
FAU_GEN.2	O.AUDIT.LOGGED
FCS_CKM.1-ipsec	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FCS_CKM.1-job	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT

Security functional requirements	Objectives
FCS_CKM.2	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FCS_COP.1-ipsec	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FCS_COP.1-job	O.DOC.NO_ALT, O.DOC.NO_DIS
FCS_RBG_EXT.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT
FDP_ACC.1-cac	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT
FDP_ACC.1-tfac	O.USER.AUTHORIZED
FDP_ACF.1-cac	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT
FDP_ACF.1-tfac	O.USER.AUTHORIZED
FDP_RIP.1	O.DOC.NO_DIS
FIA_AFL.1	O.USER.AUTHORIZED
FIA_ATD.1	O.USER.AUTHORIZED
FIA_SOS.1	O.USER.AUTHORIZED
FIA_UAU.1	O.INTERFACE.MANAGED, O.USER.AUTHORIZED

Security functional requirements	Objectives
FIA_UAU.2	O.INTERFACE.MANAGED, O.USER.AUTHORIZED
FIA_UAU.7	O.CONF.NO_DIS
FIA_UID.1	O.AUDIT.LOGGED, O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.INTERFACE.MANAGED, O.PROT.NO_ALT, O.USER.AUTHORIZED
FIA_UID.2	O.AUDIT.LOGGED, O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.INTERFACE.MANAGED, O.PROT.NO_ALT, O.USER.AUTHORIZED
FIA_USB.1	O.USER.AUTHORIZED
FMT_MOF.1	O.PROT.NO_ALT
FMT_MSA.1	O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.USER.AUTHORIZED
FMT_MTD.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.PROT.NO_ALT
FMT_SMF.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT

Security functional requirements	Objectives
FMT_SMR.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT, O.USER.AUTHORIZED
FPT_FDI_EXP.1	O.INTERFACE.MANAGED
FPT_STM.1	O.AUDIT.LOGGED
FPT_TST.1	O.SOFTWARE.VERIFIED
FTA_SSL.3	O.INTERFACE.MANAGED, O.USER.AUTHORIZED
FTP_ITC.1	O.CONF.NO_ALT, O.CONF.NO_DIS, O.DOC.NO_ALT, O.DOC.NO_DIS, O.FUNC.NO_ALT, O.PROT.NO_ALT

Table 30: Mapping of security functional requirements to security objectives

6.2.2 Sufficiency

The following rationale provides justification for each security objective for the TOE, showing that the security functional requirements are suitable to meet and achieve the security objectives:

Security objectives	Rationale
O.AUDIT.LOGGED	<p>The objective:</p> <ul style="list-style-type: none"> The TOE shall create and maintain a log of TOE use and security-relevant events, and prevent its unauthorized disclosure or alteration. <p>is met by:</p> <ul style="list-style-type: none"> FAU_GEN.1 which enforces audit policies by requiring logging of relevant events. FAU_GEN.2 which enforces audit policies by requiring logging of information associated with audited events. FIA_UID.1 and FIA_UID.2 which support audit policies by associating user identity with events FPT_STM.1 which supports audit policies by requiring time stamps associated with events.

Security objectives	Rationale
<p>O.CONF.NO_ALT</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect TSF Confidential Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MTD.1 which enforce protection by restricting access. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.CONF.NO_DIS</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect TSF Confidential Data from unauthorized disclosure. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel protected from unauthorized disclosure. • FCS_COP.1-ipsec which specifies the RSA signature generation and verification along with the AES and HMAC cryptographic algorithms used by IPsec to help prevent unauthorized disclosure. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FIA_UAU.7 which masks the display of certain passwords and PINs during authentication.

Security objectives	Rationale
	<ul style="list-style-type: none"> • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MTD.1 which enforce protection by restricting access. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.DOC.NO_ALT</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect User Document Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.1-job which specifies the PBKDF2 with HMAC-SHA256 used by the TOE to process encrypted stored print jobs. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_COP.1-job which specifies the AES decryption algorithm used by the TOE to process encrypted jobs. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FDP_ACC.1-cac which enforces protection by establishing an access control policy. • FDP_ACF.1-cac which supports access control policy by providing access control function. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MSA.1 which supports access control function by enforcing control of security attributes. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles.

Security objectives	Rationale
	<ul style="list-style-type: none"> • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.DOC.NO_DIS</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect User Document Data from unauthorized disclosure. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel protected from unauthorized disclosure. • FCS_CKM.1-job which specifies the PBKDF2 with HMAC-SHA256 used by the TOE to process encrypted stored print jobs. • FCS_COP.1-ipsec which specifies the RSA signature generation and verification along with the AES and HMAC cryptographic algorithms used by IPsec to help prevent unauthorized disclosure. • FCS_COP.1-job which specifies the AES decryption algorithm used by the TOE to process encrypted jobs. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FDP_ACC.1-cac which enforces protection by establishing an access control policy. • FDP_ACF.1-cac which supports access control policy by providing access control function. • FDP_RIP.1 which enforces protection by making residual data unavailable. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MSA.1 which supports access control function by enforcing control of security attributes. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.FUNC.NO_ALT</p>	<p>The objective:</p>

Security objectives	Rationale
	<ul style="list-style-type: none"> • The TOE shall protect User Function Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.1-job which specifies the PBKDF2 with HMAC-SHA256 used by the TOE to process encrypted stored print jobs. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FDP_ACC.1-cac which enforces protection by establishing an access control policy. • FDP_ACF.1-cac which supports access control policy by providing access control function. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MSA.1 which supports access control function by enforcing control of security attributes. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
<p>O.INTERFACE.MANAGED</p>	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall manage the operation of external interfaces in accordance with security policies. <p>is met by:</p> <ul style="list-style-type: none"> • FIA_UAU.1 and FIA_UAU.2 which enforce management of external interfaces by requiring user authentication. • FIA_UID.1 and FIA_UID.2 which enforce management of external interfaces by requiring user identification. • FPT_FDI_EXP.1 which enforces management of external interfaces by requiring (as needed) administrator control of data

Security objectives	Rationale
	<p>transmission from external Interfaces to Shared-medium Interfaces.</p> <ul style="list-style-type: none"> • FTA_SSL.3 which enforces management of external interfaces by terminating inactive sessions.
O.PROT.NO_ALT	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall protect TSF Protected Data from unauthorized alteration. <p>is met by:</p> <ul style="list-style-type: none"> • FCS_CKM.1-ipsec which specifies the type of cryptographic keys generated for IPsec key establishment. • FCS_CKM.2 which specifies the cryptographic key establishment methods used by IKEv1 and IKEv2 in IPsec to create a channel that detects unauthorized modification. • FCS_COP.1-ipsec which specifies the SHA and HMAC cryptographic algorithms used by IPsec to detect unauthorized modification. • FCS_RBG_EXT.1 which specifies the random bit generation used by IPsec. • FIA_UID.1 and FIA_UID.2 which support access control and security roles by requiring user identification. • FMT_MOF.1 which specifies the roles that can manage the security functions. • FMT_MTD.1 which enforce protection by restricting access. • FMT_SMF.1 which supports control of security attributes by requiring functions to control attributes. • FMT_SMR.1 which supports control of security attributes by requiring security roles. • FTP_ITC.1 which enforces protection by requiring the use of trusted channels for communication of data over Shared-medium Interfaces.
O.SOFTWARE.VERIFIED	<p>The objective:</p> <ul style="list-style-type: none"> • The TOE shall provide procedures to self-verify executable code in the TSF. <p>is met by:</p> <ul style="list-style-type: none"> • FPT_TST.1 which enforces verification of software by requiring the TOE include self-tests.
O.USER.AUTHORIZED	<p>The objective:</p>

Security objectives	Rationale
	<ul style="list-style-type: none"> • The TOE shall require identification and authentication of Users, and shall ensure that Users are authorized in accordance with security policies before allowing them to use the TOE. <p>is met by:</p> <ul style="list-style-type: none"> • FDP_ACC.1-tfac which enforces authorization by establishing an access control policy. • FDP_ACF.1-tfac which supports access control policy by providing access control function. • FIA_AFL.1 which locks Device Administrator account (a.k.a. Local Administrator account) after an administrator configurable positive integer of unsuccessful Control Panel authentication attempts via Local Device Sign In method. • FIA_ATD.1 which supports authorization by associating security attributes with users. • FIA_SOS.1 which specifies the password/PIN strength of certain authentication mechanisms. • FIA_UAU.1 and FIA_UAU.2 which enforce authorization by requiring user authentication. • FIA_UID.1 and FIA_UID.2 which enforce authorization by requiring user identification. • FIA_USB.1 which enforces authorization by distinguishing subject security attributes associated with User Roles. • FMT_MSA.1 which support access control function by enforcing control of security attributes. • FMT_SMR.1 which supports authorization by requiring security roles. • FTA_SSL.3 which enforces authorization by terminating inactive sessions.

Table 31: Security objectives for the TOE rationale

6.2.3 Security requirements dependency analysis

The following table demonstrates the dependencies of SFRs modeled in CC Part 2 and how the SFRs for the TOE resolve those dependencies:

Security functional requirement	Dependencies	Resolution
FAU_GEN.1	FPT_STM.1	FPT_STM.1
FAU_GEN.2	FAU_GEN.1	FAU_GEN.1
	FIA_UID.1	FIA_UID.1

Security functional requirement	Dependencies	Resolution
FCS_CKM.1-ipsec	[FCS_CKM.2 or FCS_COP.1]	FCS_CKM.2 FCS_COP.1-ipsec
	FCS_CKM.4	This dependency is unresolved. The derived keys are not formally destroyed. The object reuse mechanisms of the operating system prevent their use except in the intended context.
FCS_CKM.1-job	[FCS_CKM.2 or FCS_COP.1]	FCS_COP.1-job
	FCS_CKM.4	This dependency is unresolved. The derived keys are not formally destroyed. The object reuse mechanisms of the operating system prevent their use except in the intended context.
FCS_CKM.2	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1-ipsec
	FCS_CKM.4	This dependency is unresolved. The derived keys are not formally destroyed. The object reuse mechanisms of the operating system prevent their use except in the intended context.
FCS_COP.1-ipsec	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1-ipsec
	FCS_CKM.4	This dependency is unresolved. The derived keys are not formally destroyed. The object reuse mechanisms of the operating system prevent their use except in the intended context.
FCS_COP.1-job	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1]	FCS_CKM.1-job
	FCS_CKM.4	This dependency is unresolved. The derived keys are not formally destroyed. The object reuse mechanisms of the operating system prevent their use except in the intended context.
FCS_RBG_EXT.1	No dependencies	
FDP_ACC.1-cac	FDP_ACF.1	FDP_ACF.1-cac
FDP_ACC.1-tfac	FDP_ACF.1	FDP_ACF.1-tfac

Security functional requirement	Dependencies	Resolution
FDP_ACF.1-cac	FDP_ACC.1	FDP_ACC.1-cac
	FMT_MSA.3	This dependency is unresolved. The Job PIN, Job Encryption Password, and Permission Sets do not have default values and do not allow for the specification of alternative initial values.
FDP_ACF.1-tfac	FDP_ACC.1	FDP_ACC.1-tfac
	FMT_MSA.3	This dependency is unresolved. The IP service templates, associations of sign in method to a Control Panel application, and Permission Sets do not have default values and do not allow for the specification of alternative initial values.
FDP_RIP.1	No dependencies.	
FIA_AFL.1	FIA_UAU.1	FIA_UAU.1
FIA_ATD.1	No dependencies.	
FIA_SOS.1	No dependencies.	
FIA_UAU.1	FIA_UID.1	FIA_UID.1
FIA_UAU.2	FIA_UID.1	FIA_UID.2
FIA_UAU.7	FIA_UAU.1	FIA_UAU.1
FIA_UID.1	No dependencies.	
FIA_UID.2	No dependencies.	
FIA_USB.1	FIA_ATD.1	FIA_ATD.1
FMT_MOF.1	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_MSA.1	[FDP_ACC.1 or FDP_IFC.1]	FDP_ACC.1-cac FDP_ACC.1-tfac
	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1

Security functional requirement	Dependencies	Resolution
FMT_MTD.1	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FMT_SMF.1	No dependencies.	
FMT_SMR.1	FIA_UID.1	FIA_UID.1
FPT_FDI_EXP.1	FMT_SMR.1	FMT_SMR.1
	FMT_SMF.1	FMT_SMF.1
FPT_STM.1	No dependencies.	
FPT_TST.1	No dependencies.	
FTA_SSL.3	No dependencies.	
FTP_ITC.1	No dependencies.	

Table 32: TOE SFR dependency analysis

6.3 Security Assurance Requirements

The security assurance requirements for the TOE are the Evaluation Assurance Level 3 components as specified in [CC] part 3, augmented by ALC_FLR.2.

The following table shows the Security assurance requirements, and the operations performed on the components according to CC part 3: iteration (Iter.), refinement (Ref.), assignment (Ass.) and selection (Sel.).

Security assurance class	Security assurance requirement	Source	Operations			
			Iter.	Ref.	Ass.	Sel.
ADV Development	ADV_ARC.1 Security architecture description	CC Part 3	No	No	No	No
	ADV_FSP.3 Functional specification with complete summary	CC Part 3	No	No	No	No
	ADV_TDS.2 Architectural design	CC Part 3	No	No	No	No
AGD Guidance documents	AGD_OPE.1 Operational user guidance	CC Part 3	No	No	No	No

Security assurance class	Security assurance requirement	Source	Operations			
			Iter.	Ref.	Ass.	Sel.
	AGD_PRE.1 Preparative procedures	CC Part 3	No	No	No	No
ALC Life-cycle support	ALC_CMC.3 Authorisation controls	CC Part 3	No	No	No	No
	ALC_CMS.3 Implementation representation CM coverage	CC Part 3	No	No	No	No
	ALC_DEL.1 Delivery procedures	CC Part 3	No	No	No	No
	ALC_DVS.1 Identification of security measures	CC Part 3	No	No	No	No
	ALC_FLR.2 Flaw reporting procedures	CC Part 3	No	No	No	No
	ALC_LCD.1 Developer defined life-cycle model	CC Part 3	No	No	No	No
ASE Security Target evaluation	ASE_INT.1 ST introduction	CC Part 3	No	No	No	No
	ASE_CCL.1 Conformance claims	CC Part 3	No	No	No	No
	ASE_SPD.1 Security problem definition	CC Part 3	No	No	No	No
	ASE_OBJ.2 Security objectives	CC Part 3	No	No	No	No
	ASE_ECD.1 Extended components definition	CC Part 3	No	No	No	No
	ASE_REQ.2 Derived security requirements	CC Part 3	No	No	No	No
	ASE_TSS.1 TOE summary specification	CC Part 3	No	No	No	No
ATE Tests	ATE_COV.2 Analysis of coverage	CC Part 3	No	No	No	No

Security assurance class	Security assurance requirement	Source	Operations			
			Iter.	Ref.	Ass.	Sel.
	ATE_DPT.1 Testing: basic design	CC Part 3	No	No	No	No
	ATE_FUN.1 Functional testing	CC Part 3	No	No	No	No
	ATE_IND.2 Independent testing - sample	CC Part 3	No	No	No	No
AVA Vulnerability assessment	AVA_VAN.2 Vulnerability analysis	CC Part 3	No	No	No	No

Table 33: Security assurance requirements

6.4 Security Assurance Requirements Rationale

The evaluation assurance level has been chosen to match a Basic attack potential commensurate with the threat environment that is experienced by typical consumers of the TOE and commensurate with [PP2600.1]. In addition, the evaluation assurance level has been augmented with ALC_FLR.2 commensurate with the augmented flaw remediation capabilities offered by the developer beyond those required by the evaluation assurance level and commensurate with [PP2600.1].

7 TOE Summary Specification

7.1 TOE Security Functionality

The following section explains how the security functions are implemented by the TOE. The different TOE security functions cover the various SFR classes.

The primary security features of the TOE are:

- Auditing
- Cryptography
- Identification and authentication
- Data protection and access control
- Protection of the TSF
- TOE access protection
- Trusted channel communication and certificate management
- User and access management

7.1.1 Auditing

The TOE performs auditing of security-relevant functions. The TOE connects and sends audit records to a syslog server (part of the Operational Environment) for long-term storage and audit review. The records sent to the syslog server by the TOE are only those generated by the TOE while the syslog server has an established connection with the TOE. If the connection between the TOE and syslog server breaks and is later reestablished, only records generated by the TOE after the connection is reestablished are sent to the syslog server. Both the Jetdirect Inside and HCD System firmware generate audit records.

To generate the proper set of audit events, the TOE's enhanced security event logging must be enabled.

The complete audit record format and audit record details are provided in the [CCECG] section *Enhanced security event logging messages*. The [CCECG] groups the events into event categories in the subsection *Log messages*.

The following table provides a mapping of the [CCECG] event categories to the events defined in FAU_GEN.1. (The ST author's intent is to not consume 30 pages of the ST by repeating the audit events listed in the [CCECG], but to refer the ST reader to the appropriate category of events in the [CCECG] that map to the events defined in FAU_GEN.1.).

Required event	Additional information	[CCECG] "Log messages" category and records
Audit start-up	None	<u>Security event logging</u> Records: <ul style="list-style-type: none"> • Auditing was started during boot up • Auditing was restarted using EWS or SNMP

Required event	Additional information	[CCECG] "Log messages" category and records
Audit shutdown	None	<p><u>Security event logging</u></p> <p>Record:</p> <ul style="list-style-type: none"> • Auditing was stopped using EWS or SNMP
Job completion	Type of job	<p><u>Job completion</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Save to Device Memory job completion • Retrieve from Device Memory job completion (Print from job storage) • Print job completion
Successful and unsuccessful user authentication	None	<p><u>Local device sign in</u></p> <p>Record:</p> <ul style="list-style-type: none"> • Local Device sign-in method succeeded for the specified user • Local Device sign-in method failed
		<p><u>Windows sign in</u></p> <p>Record:</p> <ul style="list-style-type: none"> • Windows sign in method succeeded for the specified user • Windows sign in method failed for the specified user
		<p><u>LDAP sign in</u></p> <p>Record:</p> <ul style="list-style-type: none"> • LDAP sign in method succeeded for the specified user • LDAP sign in method failed for the specified user

Required event	Additional information	[CCECG] "Log messages" category and records
Successful and unsuccessful user identification	None	Same events as the "Successful and unsuccessful user authentication" events
Use of management functions	None	<u>Management of Device Administrator password</u> Record: <ul style="list-style-type: none"> • Device administrator password modified
		<u>Management of account lockout policy for Local Administrator account</u> Records: <ul style="list-style-type: none"> • Account Lockout Policy enabled • Account Lockout Policy disabled • Account Lockout Policy setting modified
		<u>Management of Windows Sign In</u> Records: <ul style="list-style-type: none"> • Windows Sign In enabled • Windows Sign In disabled • Windows Sign In configuration modified
		<u>Management of LDAP Sign In</u> Records: <ul style="list-style-type: none"> • LDAP Sign In enabled • LDAP Sign In disabled • LDAP Sign In configuration modified
		<u>Management of Control Panel user authorization ("Allow users to choose alternate sign-in methods at the product control panel" function)</u> Record: <ul style="list-style-type: none"> • Sign In and Permission Policy settings modified

Required event	Additional information	[CCECG] "Log messages" category and records
		<p><u>Management of Inactivity Timeout for Control Panel sign-in sessions</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Control Panel Inactivity Timeout Changed <hr/> <p><u>Management of permission sets</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Permission Set added • Permission Set copied • Permission Set deleted • Permission Set modified <hr/> <p><u>Management of permissions associated with permission sets</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Permission Set modified <hr/> <p><u>Management of CA certificates</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Device CA certificate installed • Device CA certificate deleted <hr/> <p><u>Management of identity certificates</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Device Identity certificate and private key installed • Device Identity certificate deleted <hr/> <p><u>Management of network identity certificate</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Device Identity certificate for network identity selected

Required event	Additional information	[CCECG] "Log messages" category and records
		<p><u>Management of IPsec/Firewall address templates</u></p> <p>Record:</p> <ul style="list-style-type: none"> • IPsec/Firewall address policy added • IPsec/Firewall address policy deleted • IPsec/Firewall address policy modified <hr/> <p><u>Management of IPsec/Firewall service templates</u></p> <p>Record:</p> <ul style="list-style-type: none"> • IPsec/Firewall service policy added • IPsec/Firewall service policy deleted • IPsec/Firewall service policy modified
<p>Modification to the group of users that are part of a role</p>	<p>None</p>	<p><u>Network user to permission set relationships</u></p> <p>Records:</p> <ul style="list-style-type: none"> • User to permission set relationship added • User to permission set relationship deleted <hr/> <p><u>Network group to permission set relationships</u></p> <p>Records:</p> <ul style="list-style-type: none"> • Group to permission set relationship added • Group to permission set relationship deleted <hr/> <p><u>IPsec/Firewall rules</u></p> <p>Records:</p> <ul style="list-style-type: none"> • IPsec/Firewall rule added • IPsec/Firewall rule deleted • IPsec/Firewall rule enabled • IPsec/Firewall rule disabled
<p>Changes to the time</p>	<p>None</p>	<p><u>System time</u></p> <p>Records:</p>

Required event	Additional information	[CCECG] "Log messages" category and records
		<ul style="list-style-type: none"> • System time changed
Failure of the trusted channel functions	None	<p><u>IKEv1 phase 1 negotiations</u></p> <p>Records:</p> <ul style="list-style-type: none"> • IKEv1 phase 1 negotiation failed initiated by the client computer • IKEv1 phase 1 negotiation failed initiated by the local device (TOE) <hr/> <p><u>IKEv1 phase 2 negotiations</u></p> <p>Records:</p> <ul style="list-style-type: none"> • IKEv1 phase 2 negotiation failed initiated by the client computer • IKEv1 phase 2 negotiation failed initiated by the local device (TOE) <hr/> <p><u>IKEv2 phase 1 negotiations</u></p> <p>Records:</p> <ul style="list-style-type: none"> • IKEv2 phase 1 negotiation failed initiated by the client computer • IKEv2 phase 1 negotiation failed initiated by the local device (TOE) <hr/> <p><u>IKEv2 phase 2 negotiations</u></p> <p>Records:</p> <ul style="list-style-type: none"> • IKEv2 phase 2 negotiation failed initiated by the client computer • IKEv2 phase 2 negotiation failed initiated by the local device (TOE)
		<p><u>IPsec ESP</u></p> <p>Records:</p> <ul style="list-style-type: none"> • IPsec ESP

Table 34: TOE audit records

Each audit record includes the date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event.

The subject identity used in the audit record is formed in the following manner. For Local Device Sign In, the subject's identity contains the user's Display Name prefixed with "LOCAL". For LDAP Sign In, the subject's identity contains the user's LDAP user name prefixed with either the LDAP server's host name or IP address then a "\". For Windows Sign In, the subject's identity contains the user's Windows domain name and Windows user name separated by a "\". For IPsec, the subject's identity is the user's IP address.

The time source used for the audit record timestamps is discussed in [section 7.1.5.3](#).

This section maps to the following SFRs:

- [FAU_GEN.1](#)
- [FAU_GEN.2](#)

7.1.2 Cryptography

The TOE uses IPsec to protect its communications channels. The QuickSec cryptographic library, which is part of the Operational Environment, is used to supply the cryptographic algorithms for IPsec. See [section 7.1.7](#) for more information.

The TOE supports the decrypting of an encrypted stored print job. To decrypt an encrypted stored print job, the TOE derives a key from a Job Encryption Password and unlocks the decryption key using the derived key. The TOE then decrypts the encrypted stored print job using the decryption key. The key derivation code and the decryption code used by the TOE is included in the TOE. See [section 7.1.4.3](#) for more information.

7.1.3 Identification and authentication (I&A)

The TOE supports multiple Control Panel sign in methods, both local and remote methods. It also supports IPsec identification and mutual authentication.

The following interfaces support I&A:

- Control Panel
- IPsec

7.1.3.1 Control Panel I&A

The Control Panel interface supports both local and remote sign in methods. The following sign in methods are allowed with the evaluated configuration:

- Local sign in method:
 - Local Device Sign In (Local Administrator account only)
- Remote sign in methods:
 - LDAP Sign In
 - Windows Sign In (via Kerberos)

(The servers for the remote sign in methods are part of the Operational Environment.)

The Control Panel also allows both non-administrative users (U.NORMAL) and administrative users (U.ADMINISTRATOR) to sign in. Prior to sign in, the Control Panel allows users to perform the following functions:

- Viewing of help information
- Viewing of device status information
- Viewing of network connectivity status information

- Viewing of system time
- Viewing of Web Services status information
- Viewing of Welcome screen
- Selection of Sign In
- Selection of sign-in method from Sign In screen
- Selection of an application
- Printing of help information
- Printing of network connectivity status information
- Changing language for the session
- Resetting of session

The TOE contains a local user database that defines a single administrative (U.ADMINISTRATOR) device user account called the Local Administrator account to support the Local Device Sign In mechanism. The Local Administrator contains the following attributes:

- Display Name
- Administrator Access Code
- Permission Set

The Display Name and Permission Set attributes for the Local Administrator account are hardcoded. There values are:

- Display Name = admin
- Permission Set = Device Administrator permission set

Only the Administrator Access Code (a.k.a. Device Administrator Password) is manageable. It can be managed via the EWS and SNMP. The Device Administrator Password can be set to value between 1 and 16 characters in length. Additionally, the Device Administrator Password can contain upper- and lower-case letters, numbers, and the following special characters:

- "!", "@", "#", "\$", "%", "^", "&", "*", "(", ")", ":", ";", "<", "=", ">", "?", "[", "]", "_", "|", "~", "{", "}"

In the evaluated configuration, the Device Administrator Password must be at a minimum 8 characters in length and must contain three of the following: uppercase letters, lowercase letters, numbers, and special characters.

The Device Administrator Password can also be used to sign into the EWS from a remote computer in addition to signing in at the Control Panel.

The Permission Set defines/determines a user's access to many of the TOE's functions. Permission Sets are discussed in more detail in [section 7.1.4.1](#).

Like Local Device Sign In, the remote sign-in methods are used by the Control Panel. The TOE receives authentication credentials from the Control Panel users and passes the credentials to the remote sign-in method. The remote sign in method returns an authentication decision to the TOE. This decision is then enforced by the TOE by granting or denying access to the Control Panel user.

In the case of LDAP, the user name and password entered at the Control Panel are used to bind to the LDAP server. The user must have a valid and active LDAP account in order to successfully bind using this method.

In the case of Kerberos, the user name and password entered at the Control Panel are used to authenticate with the Windows domain controller. The user must have a valid and active Windows domain account in order to successfully bind using this method.

When a user successfully signs in to the Control Panel, the Permission Set associated with that user is bound to that user instance and defines the user's User Role.

When users authenticate through the Control Panel, the TOE displays a dot character of a PIN, Access Code, or password typed to prevent onlookers from viewing another user's authentication data. (Job PINs are not authentication data, but the Job PIN is masked.)

The TOE contains account lockout functionality to help protect against brute-force attacks. The account lockout functionality applies to the Device Administrator account (a.k.a. Local Administrator account) only.

The lockout mechanism uses the following control values.

- Account lockout maximum attempts
- Account lockout interval
- Account reset lockout counter interval

The account lockout maximum attempts value allows an administrator to control the number of failed authentication attempts on the account before it is locked. The administrator can choose a value between 3 and 10 inclusively. Consecutive failed authentication attempts using the same authentication credential count as a single failed authentication attempt. The counted failed attempts must happen within the value set for the account reset lockout counter interval value; otherwise, the maximum attempts counter is reset when the account reset lockout counter interval value elapses.

This section maps to the following SFRs:

- FIA_AFL.1
- FIA_ATD.1
- FIA_UAU.1
- FIA_UAU.7
- FIA_UID.1
- FIA_USB.1
- FMT_SMR.1

7.1.3.2 IPsec I&A

The TOE uses IPsec to identify and mutually authenticate the following user types:

- Administrative Computer (U.ADMINISTRATOR)
- Network Client Computers (U.NORMAL)

IPsec uses IP addresses and RSA X.509v3 certificates via the IKE protocols (IKEv1 and IKEv2) to identify and authenticate, respectively, a client computer. The TOE contains one X.509v3 identity certificate designated as the network identity certificate and one or more X.509v3 CA certificates to use for the IPsec mutual authentication. The TOE does not maintain individual X.509v3 certificates of its client computers.

The User Identity of a client computer is its IP address. The TOE's internal firewall maintains lists (IPsec/Firewall address templates) of IP addresses of client computers that can connect to the TOE as a Network Client Computer and as the Administrative Computer. If a client computer has an unrecognized IP address that is not defined in the IPsec/Firewall as either the Administrative Computer or a Network Client Computer, then the client computer is not allowed to connect to the TOE. Similarly, if the client computer presents an invalid or unknown (unrecognized CA) X.509v3 certificate, the IPsec mutual authentication

mechanism will fail. The TOE uses RSA signature generation and signature verification methods as part of this validity checking process.

The TOE also uses IP addresses and X.509v3 certificates via the IKE protocols to connect to and identify other trusted IT products. See [section 7.1.7](#) for more details.

The TOE supports the following versions of the IKE protocol:

- IKEv1 ([RFC4109])
- IKEv2 ([RFC4306] and [RFC4718])

Mutual identification and authentication must be completed before any tasks can be performed by a Network Client Computer or an Administrative Computer.

The service templates define the User Role of a client computer. The following service templates are used to define the TOE's User Roles for IPsec users:

- All Services (U.ADMINISTRATOR)
- Network Client Computers (U.NORMAL)

The All Services service template is provided with the TOE. The Network Client Computers service template is created by the administrator as part of the TOE's configuration guidance.

Both the Administrative Computer and the Network Client Computers can access the PjL Interface on port 9100, but only the Administrative Computer can access the EWS (HTTP) interface and SNMP interface.

IP address management is discussed in [section 7.1.4.5](#). Certificate management is discussed in [section 7.1.7](#).

This section maps to the following SFRs:

- FIA_ATD.1
- FIA_UAU.2
- FIA_UID.2
- FIA_USB.1
- FMT_SMR.1

7.1.4 Data protection and access control

7.1.4.1 Permission Sets

For Control Panel users, the TOE uses a user's User Role (as determined by each user's Permission Set) to determine a user's access to many TOE functions. Only U.ADMINISTRATOR can query, create, modify, and delete Permission Sets. In addition, only U.ADMINISTRATOR can query, create, modify, and delete the Permission Set associations to users. The TOE contains the following built-in Permission Sets:

- Device Guest
- Device Administrator (U.ADMINISTRATOR)
- Device User (U.NORMAL)

Built-in Permission Sets cannot be renamed or deleted. The permissions associated with the Device Administrator Permission Set can be queried but cannot be disabled. The permissions associated with the Device Guest and Device User Permission Sets can be queried and enabled or disabled.

The Device Administrator Permission Set has all permissions set to grant access. In the evaluated configuration, the Device Guest Permission Set has permissions configured to deny access, and the Device User permission set has zero administrative permissions configured to grant access.

The Device Administrator Permission Set is automatically granted to the Local Administrator account (U.ADMINISTROR) and can be granted to other administrator accounts (U.ADMINISTRATOR) defined in remote authentication server (e.g. LDAP server) used by remote sign-in method (e.g. LDAP Sign In).

The Device Guest Permission Set is associated with a Control Panel session when no user signed in. In the evaluated configuration, the Device Guest Permission Set has all permissions configured to deny access. With all permissions in the Device Guest Permission Set configured to deny access, the TOE requires all users to sign in at the Control Panel in order to perform any document-processing or administrative functions at the Control Panel.

Permissions in a Permission Set include permissions as high-level as executing the Print from Job Storage application. They also include more granular permissions that control administrative functions like the ability to delete any Job Storage job. Each permission in a Permission Set has two possible values: deny access and grant access.

This section maps to the following SFRs:

- FMT_MSA.1
- FMT_SMF.1

7.1.4.2 Job PINs

Users can control access to each stored print job that they place under the TOE's control by assigning a Job PIN to each job. A Job PIN limits access to a stored print job while the job resides under the TOE's control and allows a user to control when the job is printed so that physical access to the hard copies can be controlled by the user. A Job PIN must be 4 digits (0000-9999) in length. Only one Job PIN is permitted per job.

A Job PIN can only be assigned to a job at the time of creation. They cannot be assigned after the job already resides under the TOE's control. A user assigns a Job PIN to a print job at the client computer. The Job PIN is embedded in the print job by the client computer prior to sending the print job to the TOE. Once the TOE receives a print job containing a Job PIN, the TOE enforces the Job PIN embedded in that job.

Once a Job PIN is set on a job and the job resides under the TOE's control, the Job PIN cannot be modified or deleted (i.e., the TOE does not provide the ability to manage Job PINs).

A job with a Job Encryption Password cannot be assigned a Job PIN.

This section maps to the following SFRs:

- FIA_SOS.1

7.1.4.3 Job Encryption Passwords

The TOE can store and decrypt encrypted stored print jobs received from a client computer. A stored job is first encrypted with AES-256 in CBC mode using an encryption / decryption key and protected with a key derived from the user-specified Job Encryption Password. The stored print job is then sent encrypted to the TOE and stored encrypted by the TOE. To decrypt the encrypted stored print job at the Control Panel, a user must enter the correct Job Encryption Password that was used to derive the key to protect the job. The key derivation function and decryption algorithm are included in the TOE. Only one Job Encryption Password is permitted per job.

A Job Encryption Password can only be assigned to a job at job creation time. A user assigns a Job Encryption Password to a print job via the client computer. Once a Job Encryption Password is set on a job, it cannot be changed or removed. In addition, a job with a Job Encryption Password cannot be assigned a Job PIN.

This section maps to the following SFRs:

- FCS_CKM.1-job
- FCS_COP.1-job

7.1.4.4 Common access control

The TOE protects each print job in Job Storage from non-administrative users through the use of a user identifier and a Job PIN or through the use of a Job Encryption Password. The user identifier for a stored print job received from a client computer is either assigned by that client computer or assigned by the user sending the print job from the client computer. Every print job in Job Storage is assigned either a Job PIN or a Job Encryption Password by the user at job creation time. If the TOE receives a print job from a client computer without either a Job PIN or a Job Encryption Password, the TOE cancels the job.

The User Role, as defined by the user's Permission Set, defines each user's access. The default rules for a U.NORMAL User Role for accessing a print job in Job Storage are:

- if the job is Job PIN protected:
 - the job owner (i.e., the authenticated user who matches the job's user identifier) can access (read/delete D.DOC) the job without supplying the Job PIN
 - any non-owner authenticated user who supplies the correct Job PIN can access (read/delete D.DOC) the job
- if the job is Job Encryption Password protected, any authenticated user who supplies the correct Job Encryption Password can access (read/delete D.DOC) the job

By default, a Control Panel administrator (U.ADMINISTRATOR) has a permission in their Permission Set that allows them to delete print jobs (D.DOC) in Job Storage.

This section maps to the following SFRs:

- FDP_ACC.1-cac
- FDP_ACF.1-cac

7.1.4.5 TOE function access control

The TOE controls TOE functions available at the Control Panel using permissions defined in Permission Sets. During the Control Panel sign-in process, the TOE authorizes the user after they are successfully identified and authenticated. As part of the user authorization process, the TOE associates Permission Sets to the user and then applies a Permission Set (which is the combination of the Permission Sets associated to the user). The applied Permission Set (a.k.a. session Permission Set) becomes the user's User Role. Access to each TOE function is configurable via a permission in Permission Sets by an administrator. A user can perform any function permitted in the session Permission Set. Control Panel applications (e.g., Print from Job Storage) use the user's Permission Set to determine which of the application's functions should be allowed or disallowed for the user. A Control Panel user can perform the [PP2600.1] functions of F.PRT, F.DSR and F.SMI as determined by the user's Permission Set.

Each Control Panel application requires the user to have one or more specific permissions in their session Permission Set in order to access that application. In addition, the TOE's administrator can map sign-in methods to each Control Panel application and require the user to be authenticated to that sign-in method in order to access that application. The individual applications only check and enforce permissions. They do not check the sign-in methods. Instead, the TOE enforces the sign-in method requirement at the time that the user signs in to the TOE by removing permissions from the user's session Permission Set for each application in which the user's sign in method does not match the sign in method required by the TOE. By removing the permissions required by each non-matching application, the TOE limits the set of applications that the user can access.

Administrators can change/modify the sign-in method mapped to each application. In addition, the TOE provides the feature "Allow users to choose alternate sign-in methods at the product's control panel" which allows administrators to select if the sign-in method application mappings are enforced or ignored by the TOE. It is a function in the configuration settings which can be configured through the EWS (HTTP). When this function is disabled, the TOE enforces the "sign-in method to application" mappings and prunes (reduces) the user's session Permission Set accordingly. When this function is enabled, the sign-in method mappings are ignored by the TOE and the user's session Permission Set remains unchanged.

For IPsec users, the TOE uses the IPsec/Firewall to control access to the supported network service protocols. The IPsec/Firewall contains the IP addresses of authorized client computers grouped into address templates and the network service protocols grouped into service templates. The administrator maps an address template to a service template using an IPsec/Firewall rule. Service templates, therefore, act as the User Roles for IPsec users. IP addresses of computers not contained in a rule are denied access to the TOE. The [PP2600.1] functions available to an authorized client computer are F.DSR, F.PRT, and F.SMI.

This section maps to the following SFRs:

- FDP_ACC.1-tfac
- FDP_ACF.1-tfac

7.1.4.6 Residual information protection

When the TOE deletes an object defined in section 6.1.3.5, the contents of the object are no longer available to TOE users.

This section maps to the following SFR:

- FDP_RIP.1

7.1.5 Protection of the TSF

7.1.5.1 Restricted forwarding of data to external interfaces

The TOE does not allow forwarding of data to an External Interface. The TOE contains only one External Interface in the evaluated configuration and that interface is the Shared-medium Interface. The terms External Interface and Shared-medium Interface are defined in [PP2600.1] and duplicated in section 8.2 of this Security Target.

This section maps to the following SFR:

- FPT_FDI_EXP.1

7.1.5.2 TSF self-testing

The EWS interface allows an administrator (U.ADMINISTRATOR) to execute a set of correct operations tests, TSF Data integrity tests, and integrity tests of TSF executable code. The specific security related tests available to the administrator are listed in FPT_TST.1. In some cases, the tests have pre-requisites that must be met prior to execution in order to receive valid results. For example, the LDAP Settings verification test requires LDAP Sign In to be configured and enabled prior to executing the test. The tests that may be available during self-test include:

- System Clock - Timestamp verification
- LDAP Settings verification
- Windows Setting verification

This section maps to the following SFR:

- FPT_TST.1

7.1.5.3 Reliable timestamps

The TOE contains a system clock that is used to generate reliable timestamps. Only administrators can manage the system clock.

The administrator can optionally configure the TOE to synchronize its system clock with a Network Time Protocol (NTP) server.

This section maps to the following SFR:

- [FPT_STM.1](#)

7.1.6 TOE access protection

The following session termination mechanisms are supported by the TOE:

- Inactivity timeout

7.1.6.1 Inactivity timeout

The TOE supports an inactivity timeout for Control Panel sign-in sessions. If a signed in user is inactive for longer than the specified period of inactivity, the user is automatically signed out of the Control Panel by the TOE. The inactivity period is managed by the administrator via EWS (HTTP) or the Control Panel. Only one inactivity period setting exists per TOE.

This section maps to the following SFR:

- [FTA_SSL.3](#)

7.1.7 Trusted channel communication and certificate management

Shared-medium communications (i.e., Ethernet) between the TOE and other trusted IT products use a trusted channel mechanism to protect the communications from disclosure and modification. The TOE also ensures the cryptographic operations are validated during policy processing such as validating digital signatures or encrypting and decrypting data. The following table provides a list of the mechanism(s) used to protect these channels and the channels protected by the mechanism(s).

Secure protocol	Network channel	Initiated by
IPsec	Email connections (SMTP gateway)	TOE
	EWS (HTTP) connections (including web browser & certificate upload)	Administrative Computer
	Windows domain controller (Kerberos) connections	TOE
	LDAP server connections	TOE
	NTP connections	TOE
	PJL connections	Administrative Computer & Network Client Computer
	SNMP connections	Administrative Computer
	Syslog server connections	TOE

Table 35: Trusted channel connections

The TOE uses IPsec as means to provide trusted channel communications. IPsec uses X.509v3 certificates, the Encapsulating Security Payload (ESP), Internet Security Association and Key Management Protocol (ISAKMP), IKEv1, and IKEv2 protocols, and the cryptographic algorithms listed below to protect communications.

The cryptographic functions used by IPsec are implemented in the QuickSec cryptographic library version 5.1 ([QuickSec51]) which is produced by INSIDE Secure. The QuickSec cryptographic library is part of the Operational Environment. The TOE prepares the data and invokes the appropriate cryptographic functions, but the code in the QuickSec cryptographic library performs the processing and calculations required. INSIDE Secure performs regular and rigorous developer testing of the implementation of the cryptographic algorithms in the QuickSec cryptographic library.

In the evaluated configuration, the supported IPsec cryptographic algorithms are:

- RSA 2048-bit, and 3072-bit signature generation and verification (Operational Environment)
- DSA 2048-bit, 3072-bit, 4096-bit, 6144-bit, and 8192-bit key pair generation (Operational Environment)
- DH (IKEv1, IKEv2) key establishment / exchange (Operational Environment)
- AES-128, AES-192, and AES-256 in CBC mode for data transfers (Operational Environment)
- AES-256 (with ECB mode) for the CTR_DRBG(AES) (Operational Environment)
- CTR_DRBG(AES) (Operational Environment)
- SHA-1, SHA-256, SHA-384, and SHA-512 hashing (Operational Environment)
- HMAC-SHA1-96 (Operational Environment)
- HMAC-SHA-256-128 (Operational Environment)
- HMAC-SHA-384-192 (Operational Environment)
- HMAC-SHA-512-256 (Operational Environment)

IPsec is conformant to the MUST/MUST NOT requirements of the following Internet Engineering Task Force (IETF) Request for Comments (RFCs):

- [RFC4301] and [RFC4894] for IPsec
- [RFC4303] for ESP
- [RFC4306] for ISAKMP
- [RFC4109] and [RFC4894] for IKEv1
- [RFC4306], [RFC4718], and [RFC4894] for IKEv2.

The TOE maintains the following X.509v3 certificates for IPsec in the certificate store:

- One network identity certificate
- One or more Certificate Authority (CA) certificates

The EWS (HTTP) interface allows administrators to manage these X.509v3 certificates used by IPsec.

When the TOE is first powered on, it generates a self-signed identity certificate to use for network identity. In the evaluated configuration, the use of a self-signed identity certificate generated by the TOE for network identity is not permitted. The administrator must import a CA-signed identity certificate with private key and designate it for network identity usage. The TOE requires a network identity certificate to always exist; therefore, it allows the administrator to replace the network identity certificate used by IPsec.

The TOE uses a copy of the self-signed identity certificate it generates when first powered on as a CA certificate (self-signed) and comes with other CA certificates pre-installed. The administrator must obtain a CA certificate from the Operational Environment and install this certificate when setting up the evaluated configuration. The TOE allows the administrator to install and delete CA certificates used by IPsec.

This section maps to the following SFRs:

- FCS_CKM.1-ipsec

- FCS_CKM.2
- FCS_COP.1-ipsec
- FCS_RBG_EXT.1
- FMT_MTD.1
- FMT_SMF.1
- FTP_ITC.1

7.1.8 User and access management

The TOE supports the following roles:

- Administrators (U.ADMINISTRATOR)
- Users (U.NORMAL)

Administrators maintain and configure the TOE and Operational Environment. Users perform the standard print and document storage and retrieval functions on the system.

In addition, the TOE performs many security management functions.

Only administrators can configure the list of Network Client Computers and the Administrative Computer that are allowed to connect to the TOE and the list of other trusted IT products to which the TOE will connect. Administrators do this by creating, modifying, and deleting IPsec/Firewall address templates, service templates, and rules via the TOE. Similarly, only administrators can create, modify, and delete address templates, service templates, and rules via the TOE for trusted IT products.

For each Control Panel application, an administrator can modify the association of a sign-in method to an application. (For example, the administrator can associate LDAP Sign In method to the Print from Job Storage application). In addition, administrators control whether or not a Control Panel user must use the administrator-selected sign-in method associated with the applications in order to access that application. This latter feature is controlled through the "Allow users to choose alternate sign-in methods at the product's control panel" function.

It's worth noting that although the following security attributes are enforced by the TOE, the TOE does not provide functionality to manage these attributes (i.e., the TOE cannot add, change, delete, or query these attributes on an existing job) and the TOE does not provide default values for these attributes; therefore, there are no management SFRs specified in this ST for these security attributes:

- Job Encryption Password - The job is protected using a key derived from the Job Encryption Password by the Operational Environment. The TOE does not provide a mechanism to change or delete the password on the job.
- Job PIN - A print job's Job PIN is set by the Operational Environment (i.e., Network Client Computer). The TOE does not provide a mechanism to change or delete a Job PIN from a print job.

This section maps to the following SFRs:

- FMT_MOF.1
- FMT_MSA.1
- FMT_MTD.1
- FMT_SMF.1
- FMT_SMR.1

8 Abbreviations, Terminology and References

8.1 Abbreviations

AES

Advanced Encryption Standard

AH

Authentication Header (IPsec)

ASCII

American Standard Code for Information Interchange

CA

Certificate Authority

CBC

Cipher Block Chaining

DNS

Domain Name System

eMMC

embedded MMC

ESP

Encapsulating Security Payload (IPsec)

EWS

Embedded Web Server

HCD

Hardcopy Device

HMAC

Hashed Message Authentication Code

HTML

Hypertext Markup Language

HTTP

Hypertext Transfer Protocol

IEEE

Institute of Electrical and Electronics Engineers, Inc.

IKE

Internet Key Exchange (IPsec)

IP

Internet Protocol

IPsec

Internet Protocol Security

ISAKMP

Internet Security Association Key Management Protocol (IPsec)

LCD

Liquid Crystal Display

LDAP

Lightweight Directory Access Protocol

MAC

Message Authentication Code

MMC

MultiMediaCard

NFC

Near Field Communication

NTLM

Microsoft NT LAN Manager

NTP

Network Time Protocol

OSP

Open Extensibility Platform

OSPd

OSP device layer

PIN

Personal Identification Number

PJL

Printer Job Language

PRF

Pseudo-random Function

PSTN

Public Switched Telephone Network

SFR

Security Functional Requirement

SHA

Secure Hash Algorithm

SMTP

Simple Mail Transfer Protocol

SNMP

Simple Network Management Protocol

SOAP

Simple Object Access Protocol

SSH

Secure Shell

TOE

Target of Evaluation

USB

Universal Serial Bus

WINS

Windows Internet Name Service

XML

Extensible Markup Language

8.2 Terminology

This section contains definitions of technical terms that are used with a meaning specific to this document. Terms defined in the [CC] are not reiterated here, unless stated otherwise.

Administrative User

This term refers to a user with administrative control of the TOE.

Authentication Data

This includes the Access Code and/or password for each user of the product.

Control Panel Application

An application that resides in the firmware and is selectable by the user via the Control Panel.

Device Administrator Password

The password used to restrict access to administrative tasks via EWS and the Control Panel. This password is also required to associate a user with the Administrator role. In product documentation, it may also be referred to as the Local Device Administrator Password, Local Device Administrator Access Code, the Device Password, or the Administrator Password.

External Interface

A non-hardcopy interface where either the input is being received from outside the TOE or the output is delivered to a destination outside the TOE.

Hardcopy Device (HCD)

This term generically refers to the product models in this Security Target.

Near Field Communication (NFC)

Proximity (within a few inches) radio communication between two or more devices.

Shared-medium Interface

Mechanism for transmitting or receiving data that uses wired or wireless network or non-network electronic methods over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple users.

User Security Attributes

Defined by functional requirement FIA_ATD.1, every user is associated with one or more security attributes which allow the TOE to enforce its security functions on this user.

Wireless Direct Print

Feature that enables Wi-Fi capable devices (for example: smart phones, tablets, or computers) to establish a direct peer-to-peer wireless connection with the printer to submit print jobs.

8.3 References**CC Common Criteria for Information Technology Security Evaluation**

Version	3.1R4
Date	September 2012
Location	http://www.commoncriteriaportal.org/files/ccfiles/CCPART1V3.1R4.pdf
Location	http://www.commoncriteriaportal.org/files/ccfiles/CCPART2V3.1R4.pdf
Location	http://www.commoncriteriaportal.org/files/ccfiles/CCPART3V3.1R4.pdf

FIPS197 Advanced Encryption Standard

Date	2001-11-26
Location	http://csrc.nist.gov/publications/fips/fips197/fips-197.pdf

FIPS186-2 Digital Signature Standard (DSS)

Date	2001-10-05
Location	https://csrc.nist.gov/CSRC/media/Publications/fips/186/2/archive/2001-10-05/documents/fips186-2-change1.pdf

FIPS180-4 Secure Hash Standard (SHS)

Date	2015-08-04
Location	https://csrc.nist.gov/publications/detail/fips/180/4/final

PKCS1v1.5 Public-Key Cryptography Standard (PKCS) #1: RSA Encryption Standard

Author(s)	RSA Laboratories
Version	1.5
Date	November 1993

PP2600.1 IEEE Std 2600.1-2009; "2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A"

Version	1.0
---------	-----

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-DSR SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-PRT SFR Package for Hardcopy Device Print (PRT) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

PP2600.1-SMI SFR Package for Hardcopy Device Shared-medium Interface (SMI) Functions

Version 1.0

Date June 2009

Location https://www.niap-ccevs.org/pp/pp_hcd_br_v1.0.pdf

QuickSec51 QuickSec 5.1 Toolkit Reference Manual

Author(s) INSIDE Secure

Version 1.0

Date December 2009

RFC2104 HMAC: Keyed-Hashing for Message Authentication

Author(s) H. Krawczyk, M. Bellare, R. Canetti

Date 1997-02-01

Location <http://www.ietf.org/rfc/rfc2104.txt>

RFC2404 The Use of HMAC-SHA-1-96 within ESP and AH

Author(s) C. Madson, R. Glenn

Date 1998-11-01

Location <http://www.ietf.org/rfc/rfc2404.txt>

RFC2409 The Internet Key Exchange (IKE)

Author(s) D. Harkins, D. Carrel

Date 1998-11-01

Location <http://www.ietf.org/rfc/rfc2409.txt>

RFC4109 Algorithms for Internet Key Exchange version 1 (IKEv1)

Author(s) P. Hoffman

Date 2005-05-01

Location <http://www.ietf.org/rfc/rfc4109.txt>

RFC4301 Security Architecture for the Internet Protocol

Author(s) S. Kent, K. Seo

Date 2005-12-01

Location <http://www.ietf.org/rfc/rfc4301.txt>

RFC4303 IP Encapsulating Security Payload (ESP)

Author(s) S. Kent

Date 2005-12-01

Location <http://www.ietf.org/rfc/rfc4303.txt>

RFC4306 Internet Key Exchange (IKEv2) Protocol

Author(s) C. Kaufman

Date 2005-12-01

Location <http://www.ietf.org/rfc/rfc4306.txt>

RFC4718 IKEv2 Clarifications and Implementation Guidelines

Author(s) P. Eronen, P. Hoffman

Date 2006-10-01

Location <http://www.ietf.org/rfc/rfc4718.txt>

RFC4868 Using HMAC-SHA-256, HMAC-SHA-384, and HMAC-SHA-512 with IPsec

Author(s) S. Kelly, S. Frankel
Date 2007-05-01
Location <http://www.ietf.org/rfc/rfc4868.txt>

RFC4894 Use of Hash Algorithms in Internet Key Exchange (IKE) and IPsec

Author(s) P. Hoffman
Date 2007-05-01
Location <http://www.ietf.org/rfc/rfc4894.txt>

SP800-38A Recommendation for Block Cipher Modes of Operation: Methods and Techniques

Author(s) Morris Dworkin
Version NIST Special Publication 800-38A 2001 Edition
Date December 2001
Location <http://csrc.nist.gov/publications/nistpubs/800-38a/sp800-38a.pdf>

CCECG Common Criteria Evaluated Configuration Guide for HP Single-Function Printers

**HP LaserJet Enterprise M607/M608/M609,
HP LaserJet Managed E60055/E60065/E60075,
HP Color LaserJet Enterprise M652/M653,
HP Color LaserJet Managed E65060/E65060,
HP PageWide Enterprise Color 556,
HP PageWide Enterprise Color 765,
HP PageWide Managed Color E55650,
HP PageWide Managed Color E75160**

Author(s) HP
Edition 1
Date 6/2019

**556-UG HP PageWide Enterprise Color 556
User Guide**

Author(s) HP
Edition 1

Date 5/2016

**556-IG HP PageWide Enterprise Color 556
Installation Guide**

Author(s) HP

Date 2016

**M607_8_9 HP LaserJet Enterprise M607, M608, M609
-UG User Guide**

Author(s) HP

Edition 2

Date 8/2017

**M607_8_9 HP LaserJet Enterprise M607, M608, M609
-IG Installation Guide**

Author(s) HP

Date 2017

**765-UG HP PageWide Enterprise Color 765,
HP PageWide Color 755
User Guide**

Author(s) HP

Edition 4

Date 1/2019

**765-IG HP PageWide Enterprise Color 765 series
HP PageWide Color 755 series
Installation Guide**

Author(s) HP

Date 2018

**E75160- HP PageWide Managed Color E75160, P75250
UG User Guide**

Author(s) HP
Edition 2
Date 3/2018

**E75160-IG HP PageWide Managed Color E75160 Series
HP PageWide Managed Color P75250 Series
Installation Guide**

Author(s) HP
Edition 1
Date 3/2018

**M652_3-UG HP Color LaserJet Enterprise M652, M653
User Guide**

Author(s) HP
Edition 1
Date 5/2017

**M652-IG HP Color LaserJet Enterprise M652
Installation Guide**

Author(s) HP
Date 2017

**M653-IG HP Color LaserJet Enterprise M653
Installation Guide**

Author(s) HP
Date 2017