



Palo Alto Networks WF-500-B Appliance running WildFire 11.1 Security Target

Version: 1.0
Date: October 22, 2025

Palo Alto Networks, Inc.

www.paloaltonetworks.com

© 2025 Palo Alto Networks, Inc. Palo Alto Networks is a registered trademark of Palo Alto Networks. A list of our trademarks can be found at <https://www.paloaltonetworks.com/company/trademarks.html>. All other marks mentioned herein may be trademarks of their respective companies.

Table of Contents

1. SECURITY TARGET INTRODUCTION	4
1.1 SECURITY TARGET, TOE AND CC IDENTIFICATION	5
1.2 CONFORMANCE CLAIMS	5
1.3 CONVENTIONS	6
1.3.1 Terminology	7
1.3.2 Acronyms	7
2. PRODUCT DESCRIPTION	9
2.1 TOE OVERVIEW	9
2.2 TOE ARCHITECTURE	10
2.2.1 Physical Boundaries	11
2.2.2 Logical Boundaries	12
2.3 TOE DOCUMENTATION	13
2.4 EXCLUDED FUNCTIONALITY	13
3. SECURITY PROBLEM DEFINITION	15
4. SECURITY OBJECTIVES	16
4.1 SECURITY OBJECTIVES FOR THE OPERATIONAL ENVIRONMENT	16
5. IT SECURITY REQUIREMENTS	17
5.1 EXTENDED REQUIREMENTS	17
5.2 TOE SECURITY FUNCTIONAL REQUIREMENTS	17
5.2.1 Security Audit (FAU)	19
5.2.2 Cryptographic Support (FCS)	22
5.2.3 Identification and Authentication (FIA)	28
5.2.4 Security Management (FMT)	30
5.2.5 Protection of the TSF (FPT)	30
5.2.6 TOE Access (FTA)	32
5.2.7 Trusted Path/Channels (FTP)	32
5.3 TOE SECURITY ASSURANCE REQUIREMENTS	34
6. TOE SUMMARY SPECIFICATION	35
6.1 SECURITY AUDIT	36
6.2 CRYPTOGRAPHIC SUPPORT	36
6.3 IDENTIFICATION AND AUTHENTICATION	43
6.4 SECURITY MANAGEMENT	45
6.5 PROTECTION OF THE TSF	46
6.6 TOE ACCESS	49
6.7 TRUSTED PATH/CHANNELS	49
7. PROTECTION PROFILE CLAIMS	50
8. RATIONALE	51

LIST OF FIGURES

Figure 1 - WildFire File Analysis	1
Figure 2 - WildFire Interaction with Systems	7
Figure 3 - TOE Architecture	7

LIST OF TABLES

Table 1 TOE Platforms	8
Table 2 Excluded Features	10
Table 3 TOE Security Functional Components	14
Table 4 Auditable Events	16
Table 5 Assurance Components	29
Table 6 Cryptographic Functions	31
Table 7 FIPS 186-4 Conformance	33
Table 8 Private Keys and CSPs	34

1. Security Target Introduction

This section identifies the Security Target (ST) and Target of Evaluation (TOE) identification, ST conventions, ST conformance claims, and the ST organization. The TOE are physical appliances running WildFire software version 11.1, provided by Palo Alto Networks, Inc.

The physical is the WF-500-B, which is an on-premise network device that identify unknown malware, zero-day exploits, and Advanced Persistent Threats (APTs) through dynamic analysis, and automatically disseminates protection in near real-time to help security teams meet the challenge of advanced cyber-attacks. Unknown files are analyzed by WildFire in a scalable sandbox environment where new threats are identified, and protections are automatically developed and delivered in the form of an update. The result is a unique, closed loop approach to controlling cyber threats that begins with positive security controls to reduce the attack surface, inspection of all traffic, ports, and protocols to block all known threats, and rapid detection of unknown threats by observing their actual behavior. The appliance's architecture allows organizations to meet privacy and regulatory requirements for local analysis while still benefiting from shared threat intelligence and protections from other WildFire subscribers.

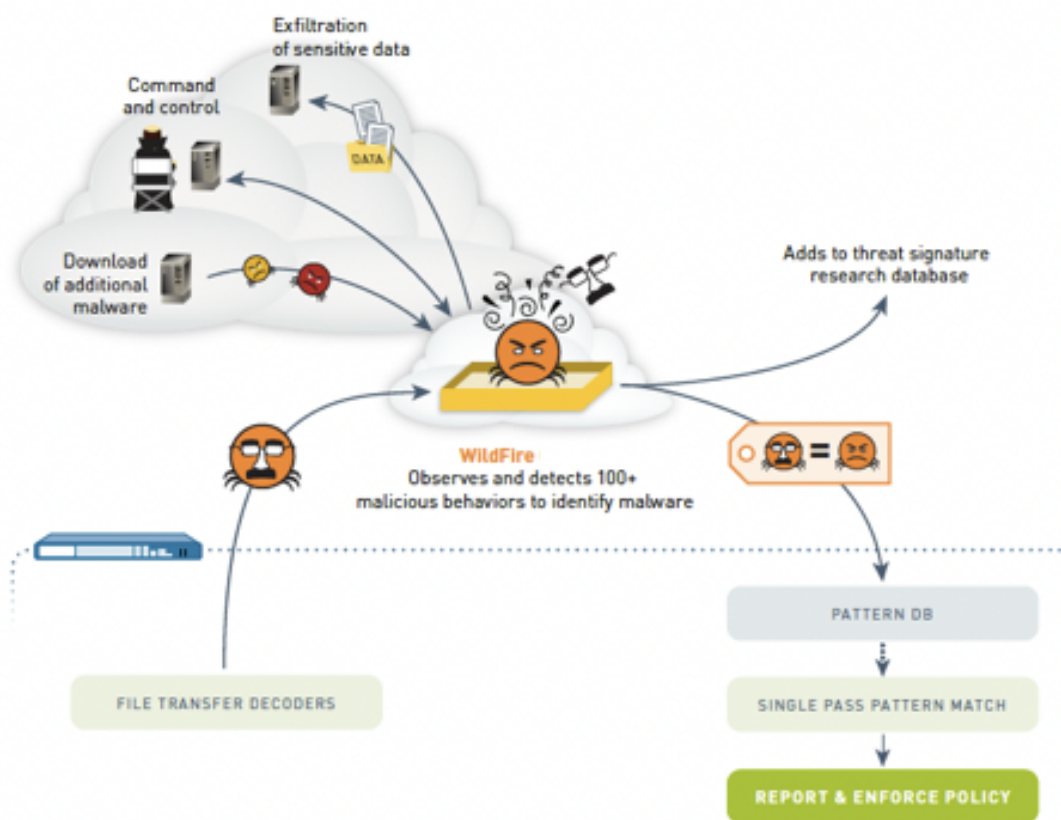


Figure 1 - WildFire File Analysis

The focus of this evaluation is on the TOE functionality supporting the claims in the collaborative Protection Profile for Network Devices and SSH Package. (See Section 1.2 for specific version information).

The only capabilities covered by the evaluation are those specified in the aforementioned Protection Profile and Functional Package, all other capabilities are not covered in the evaluation. The security functionality specified in [NDcPP] and [SSHPKG] includes protection of communications between the TOE and trusted external IT entities (trusted channel), protection of communications between the TOE and administrators (trusted path), identification and authentication of administrators, auditing of security-relevant events, ability to verify the source and integrity of updates to the TOE, implementation of session idle timeout, and the restricted use of FIPS Approved algorithms and protocols.

The Security Target contains the following additional sections:

- Product Description
- Security Problem Definition
- Security Objectives
- IT Security Requirements
- TOE Summary Specification
- Protection Profile Claims
- Rationale

1.1 Security Target, TOE and CC Identification

ST Title – Palo Alto Networks WF-500-B Appliance running WildFire 11.1 Security Target

ST Version – Version 1.0

ST Date – October 22, 2025

TOE Identification – Palo Alto Networks WF-500-B Appliance running WildFire 11.1.

TOE Developer – Palo Alto Networks, Inc.

Evaluation Sponsor – Palo Alto Networks, Inc.

CC Identification – *Common Criteria for Information Technology Security Evaluation, Version 3.1, Release 5, April 2017*

1.2 Conformance Claims

This ST and the TOE it describes are conformant to the following CC specifications: This ST is conformant to:

- PP Reference: collaborative Protection Profile for Network Devices, Version 3.0e, 6-December-2023 [NDcPP]
- Package Reference: Functional Package for Secure Shell (SSH) Version 1.0 13-May-2021 [SSHPKG]

The following NIAP Technical Decisions apply to the [SSHPKG], and have been accounted for in the ST development:

- TD0682: Addressing Ambiguity in FCS_SSHS_EXT.1 Tests
 - o TD updates test evaluation activities that apply to the TOE. [SSHPKG]
- TD0695: Choice of 128 or 256 bit size in AES-CTR in SSH Functional Package
 - o This TD is applicable to the TOE because it supports both 128 and 256 bits for AES-CTR. [SSHPKG]
- TD0732: FCS_SSHS_EXT.1.3 Test 2 Update
 - o TD updates test evaluation activities that apply to the TOE. [SSHPKG]

- TD0777: Clarification to Selections for Auditable Events for FCS_SSH_EXT.1
 - o This TD is applicable to the TOE because it logs failure to establish SSH connection. [SSHPKG]
- TD0909: Updates to FCS_SSH_EXT.1.1 App Note in SSH FP 1.0
 - o This TD is applicable to the TOE as it supports public keys. [SSHPKG]

The following NIAP Technical Decisions apply to the [NDcPP], and have been accounted for in the ST development:

- TD0836: NIT Technical Decision: Redundant Requirements in FPT_TST_EXT.1
 - o The TD modifies the FPT_TST_EXT.1.1 SFR and the AAR evaluation activities have been modified. [NDcPP]
 - TD0868: NIT Technical Decision: Clarification of time frames in FCS_IPSEC_EXT.1.7 and FCS_IPSEC_EXT.1.8
 - o This TD is not applicable because the TOE does not use IPSec [NDcPP]
 - TD0879: NIT Technical Decision: Correction of Chapter Headings in CPP_ND_V3.0E
 - o This TD modifies the chapter numbering and has been applied [NDcPP]
 - TD0880: NIT Technical Decision: Removal of Duplicate Selection in FMT_SMF.1.1
 - o This TD removes a duplicate selection [NDcPP]
 - TD0886: Clarification to FAU_STG_EXT.1 Test 6
 - o This TD adds an application note to clarify a test activity that applies to the TOE [NDcPP]
 - TD0899: NIT Technical Decision: Correlation of Recognition Test for TLS 1.2
 - o This TD modifies test activities for TLS Clients and Server, which is supported by the TOE [NDcPP]
 - TD0900: NIT Technical Decision: Clarification to Local Administrator Access in FIA_UIA_EXT.1.3
 - o This TD modifies a supported function, which has been applied to this ST [NDcPP]
 - TD0921: NIT Technical Decision: Addition of FIPS PUB 186-5 and Correction of Assignment
 - o This TD modifies a supported function, which has been applied to this ST [NDcPP]
 - TD0923: NIT Technical Decision: Auditable event for FAU_STG_EXT.1 in FAU_GEN.1.2
 - o This TD modifies a function that is supported / claimed by the TOE [NDcPP]
-
- Common Criteria for Information Technology Security Evaluation Part 2: Security functional components, Version 3.1, Revision 5, April 2017.
 - Part 2 Extended
 - Common Criteria for Information Technology Security Evaluation Part 3: Security assurance components, Version 3.1 Revision 5, April 2017.
 - Part 3 Conformant.

1.3 Conventions

The following conventions have been applied in this document:

- Security Functional Requirements – Part 2 of the CC defines the approved set of operations that may be applied to functional requirements: iteration, assignment, selection, and refinement.
- All operations performed in this ST are identified according to conventions described in [NDcPP].

- The ST author does not change operations that have been completed by the PP authors nor undo the formatting. For example, if the text is italicized, bolded, or underlined by the PP author, the ST author will not undo it. In this way operations have been identified.
- Selection/Assignment operations completed by the PP author remain as described in the [NDcPP].
- Selection/Assignment operations completed by the ST author was bolded to show that it was completed by the ST author and not taken as-is from the PP.
- Iteration operations completed by the ST author are identified with (1), (2), and (next number) with descriptive text following the name (e.g. FCS_HTTPS_EXT.1(1) HTTPS Protocol (TLS Server)).

1.3.1 Terminology

The following terms and abbreviations are used in this ST:

- WF – WildFire appliance
- UID – Unique Identification feature is a combination LED/button that is used to assist a technician in locating a device
- CO – Cryptographic Officer (Administrator or superuser)
- CCECG – Common Criteria Evaluated Configuration Guide used to assist an administrator with steps for configuring the TOE properly

1.3.2 Acronyms

AES	Advanced Encryption Standard
CBC	Cipher-Block Chaining
CC	Common Criteria for Information Technology Security Evaluation
CEM	Common Evaluation Methodology for Information Technology Security
CM	Configuration Management
CLI	Command Line Interface
DH	Diffie-Hellman
DRBG	Deterministic Random Bit Generator
EEPROM	Electrically Erasable Programmable Read-Only Memory
FIPS	Federal Information Processing Standard
FSP	Functional Specification
FTP	File Transfer Protocol
GCM	Galois/Counter Mode
GUI	Graphical User Interface
HMAC	Hashed Message Authentication Code
HTTPS	Hypertext Transfer Protocol Secure
IP	Internet Protocol
NIST	National Institute of Standards and Technology
PP	Protection Profile
REST	Representational State Transfer
RSA	Rivest, Shamir and Adleman (algorithm for public-key cryptography)
SA	Security Association
SAR	Security Assurance Requirement
SFR	Security Functional Requirement
SHA	Secure Hash Algorithm
SSH	Secure Shell
SSL	Secure Socket Layer

ST	Security Target
TLS	Transport Layer Security
TOE	Target of Evaluation
TSF	TOE Security Functions
UID	User Identifier
URL	Uniform Resource Locator

2. Product Description

The TOE is the Palo Alto Networks WF-500-B appliance, which utilizes the WildFire 11.1 software. The TOE provides detection and prevention of zero-day malware using a combination of dynamic and static analysis to detect threats and create protections to block malware. The WF-500-B appliance extends the capabilities of Palo Alto Networks' Next Generation Firewalls by receiving network traffic samples to identify and block targeted and unknown malware.

The evaluation only includes the WF-500-B physical device as identified in sections above. Other deployments of WildFire are cloud-based and are not within scope of this evaluation. Palo Alto Networks Next-Generation Firewalls are components of the TOE's Operational Environment and were evaluated previously, and information about them are provided for completeness only.

2.1 TOE Overview

It is required that the TOE be placed in FIPS-CC mode, which ensures that only FIPS/CC approved/allowed algorithms are utilized when interacting with other devices in the operational network. For communications with Palo Alto Networks Firewalls appliances, only the secure communication channels are claimed.

The TOE utilizes various protocols in its communication with other devices. TLS is used to secure connections between the TOE and other devices on the network such as the Firewall and syslog server. For any updates that are required on the TOE such as configuration changes that are processed via CLI, SSHv2 is used to secure these connections.

The various protocols implemented by the module include TLS and SSH. The TOE has the ability to handle certificates for their desired purpose as well as being able to generate certificates that can be used for these functions. Administrators are able to setup the TOE to support mutual authentication to improve the security of their appliance as it communicates with other devices.

As a network device, the TOE is required to generate logging events, which can be used by administrators to audit functions of the TOE as well as its interactions with other components. The TOE provides the ability to store logs locally, and also has the ability to send these logs to an external syslog server via a TLS connection.

To protect the TOE from unauthorized access and disruption, the TOE has security features in place that will log out idle administrators, lock the device in the event of too many failed authentication attempts, and has the ability to increase the password length to harden the credentials of administrators.

Operators that provide the correct credentials to the TOE are able to perform all management functions via the CLI, which is protected using SSHv2. Configurations can be updated for the ability of the appliance to communicate with other devices on the network, generate certificates, and perform security actions such as zeroization.

Figure 2 provides an overview of the communication protocols used between the TOE and other devices on the network. The PAN-OS Firewall devices are in the operational environment, and only the secure communication channels from the WildFire to those devices are claimed.

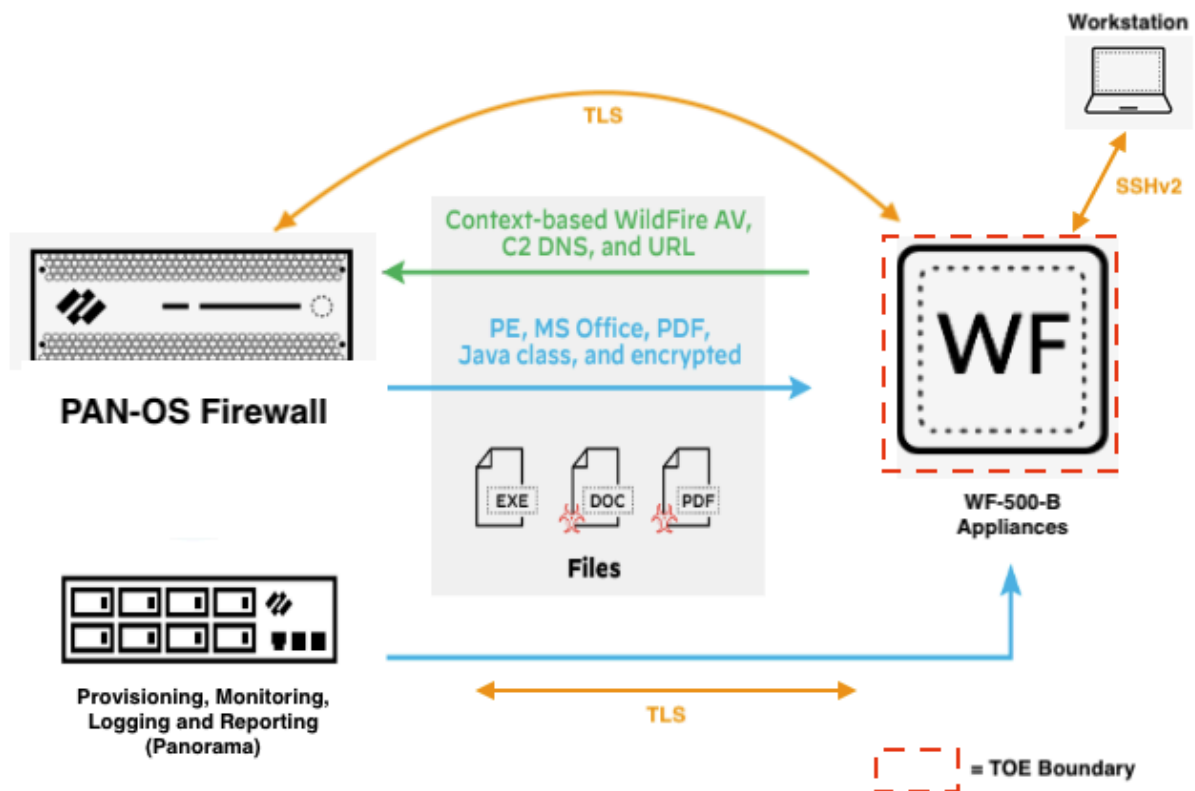


Figure 2 - WildFire Interaction with Systems

2.2 TOE Architecture

The TOE is a hardware and software solution that is comprised of items listed in Section 2.2.1 and 2.2.2. The software comes pre-installed on the device and can be updated by downloading a new version from the Palo Alto Networks support site. The system consists of the following items: system software, database, linux-derived operating system, and the hardware. The database is a repository for audit logs, user logs, and system/configuration data. The system software contains necessary items to support the functionality of the device such as using OpenSSL/OpenSSH, and items necessary for management interfaces (CLI). The WildFire 11.1 software runs on top of the PAN-OS 11.1 operating system. PAN-OS 11.1 is an operating system derived from Linux kernel version 4.18.0 to enforce domain separation, memory management, disk access, file I/O, and communications with the underlying hardware components including memory, network I/O, CPUs, and hard disks. Only services and libraries required by the system software and DB are enabled in the OS.

The following diagram demonstrates the software and hardware architecture of the TOE.

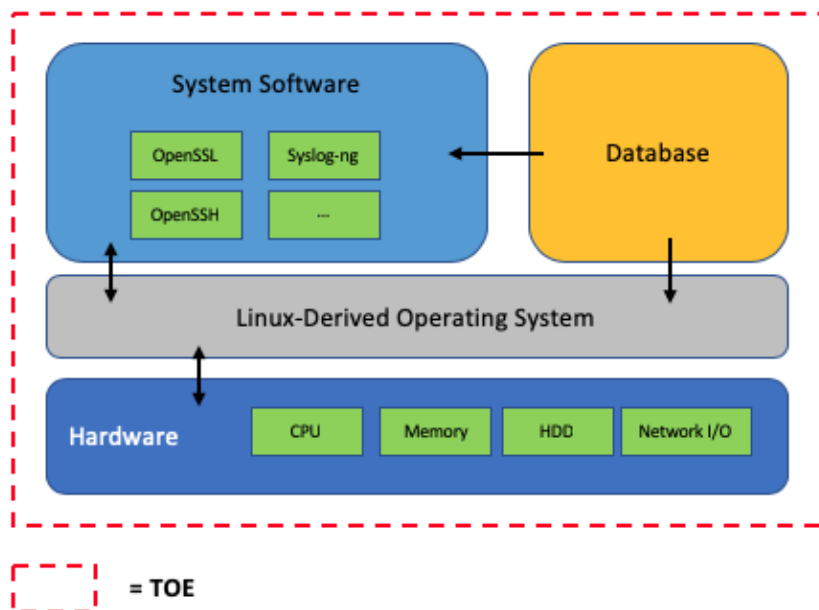


Figure 3 - TOE Architecture

2.2.1 Physical Boundaries

The TOE consists of the following components:

- Palo Alto Networks WF-500-B hardware appliance
- WildFire 11.1 (running on top of PAN-OS 11.1): The software component that runs on the appliance

The WF-500-B appliance includes the following ports:

- (Qty. 1) RJ-45 10/100/1000 management port used for managing the device and for data traffic
- (Qty. 3) RJ-45 10/100/1000 ports used for data traffic
- (Qty. 1) Graphics Port (reserved for future use)
- (Qty. 1) UID
- (Qty. 1) DB-9 serial port for console access (disabled in FIPS-CC mode)
- (Qty. 2) Power supplies
- (Qty. 4) USB ports (reserved for future use; disabled in FIPS-CC mode)

Table 1 TOE Platforms

Product Identification	Illustration	Description
WF-500-B		<p>The appliance detects unknown threats through a combination of multiple complementary analysis techniques.</p> <p>Processor: Intel Xeon Silver 4316 (Ice Lake) Memory: 512GB DDR4-3200 RAM System Storage: 512 GB SSD system storage</p>

The operational environment includes the following:

- Syslog server
- Palo Alto Networks Firewall appliances
- Workstation
 - o SSHv2 client

2.2.2 Logical Boundaries

This section summarizes the security functions provided by the TOE:

- Security Audit
- Cryptographic Support
- Identification and Authentication
- Security Management
- Protection of the TSF
- TOE Access
- Trusted Path/Channels

2.2.2.1 Security Audit

The TOE is designed to be able to generate logs for a variety of security relevant events including the events specified in [NDCPP] and [SSHPKG]. The TOE can be configured to store the logs locally or can be configured to send the logs to a designated external log server.

2.2.2.2 Cryptographic Support

The TOE implements NIST validated cryptographic algorithms that provide key management, random bit generation, encryption/decryption, digital signature and cryptographic hashing and keyed-hash message authentication features in support of cryptographic protocols such as TLS and SSH. In order to utilize these features, the TOE must be configured in FIPS-CC mode.

The TOE's (Palo Alto Networks Crypto Module) cryptographic functionality is validated by the following CAVP certificate: #A3453.

2.2.2.3 Identification and Authentication

The TOE requires that all users that access the TOE be successfully identified and authenticated before they can have access to any security functions that are available in the TOE. The TOE offers functions through connections using SSH for administrators.

The TOE supports the local definition and authentication of administrators with username, password, SSH keys, and role that it uses to authenticate the operator. These items are associated with an operator and an authorized role for access to the TOE. The TOE uses X.509 certificates to support TLS authentication. In the evaluated configuration, the syslog connection implements OCSP for status verification for the certificate. The connection to the firewalls can use either CRLs or OCSP.

2.2.2.4 Security Management

The TOE provides access to the security management features using the CLI. CLI commands are transmitted over SSH for secure connections. Security management commands are limited to administrators and only available after the operator has successfully authenticated themselves to the TOE. The TOE provides access to these services using an SSHv2 client. The product also includes a console port, but once FIPS-CC mode is enabled, the console port is disabled.

2.2.2.5 Protection of the TSF

The TOE implements features designed to protect itself, and to ensure the reliability and integrity of its security functions.

Stored passwords and cryptographic keys are protected so that unauthorized access does not result in sensitive data being lost, and the TOE also contains various self-tests so that it can detect if there are any errors with the system or if malicious activity has occurred. The TOE provides its own timing mechanism to ensure that reliable time information is present. The TOE uses digital signature mechanisms when performing trusted updates to ensure installation of software is valid and authenticated properly.

2.2.2.6 TOE Access

The TOE provides the ability for both TOE and user-initiated locking of the interactive sessions for the TOE termination of an interactive session after a period of inactivity is observed. Additionally, the TOE is able to display an advisory message regarding unauthorized use of the TOE before establishing a user session.

2.2.2.7 Trusted Path/Channels

The TOE protects interactive communication with administrators using SSH. Communication with other devices and services (such as a Syslog server) are protected using TLS and X.509 certificates to support TLS authentication.

2.3 TOE Documentation

Palo Alto Networks, Inc. has several documents that provide operators with information regarding the installation, and the included security features.

For WildFire 11.1 these documents include the following:

- Palo Alto Networks Common Criteria Evaluated Configuration Guide (CCECG) for WildFire 11.1
- Palo Alto Networks WildFire Appliance Administrator Guide Version 11.1, Last Revised: August 23, 2023
- WF-500-B WildFire Appliance Hardware Reference Guide, March 21, 2023

2.4 Excluded Functionality

The list below identifies features or protocols that are not evaluated or must be disabled, and the rationale why. Note that this does not mean the features cannot be used in the evaluated configuration (unless explicitly stated so). It means that the features were not evaluated and/or validated by an independent third party and the functional correctness of the implementation is vendor assertion. Evaluated functionality is scoped exclusively to the security functional requirements specified in Security Target. In particular, only the following protocols implemented by the TOE have been tested, and only to the extent specified by the security functional requirements: TLS and SSH. The features below are out of scope.

Table 2 Excluded Features

Feature	Description
Telnet Protocol	Telnet is disabled by default and cannot be enabled in the evaluated configuration. Telnet is insecure protocols which allow for plaintext passwords to be transmitted. Use SSH only as the management protocols to manage the TOE.

Feature	Description
HTTP	HTTP is disabled by default and cannot be enabled in the evaluated configuration.
External Authentication Servers	The WildFire appliance supports the optional use of RADIUS as an authentication server, but this is not claimed in the TOE's evaluated configuration.
WildFire Cloud	Other deployments of WildFire are cloud-based and not within the scope of this evaluation.
Shell and Console Access	The shell and console access is only allowed for pre-operational installation, configuration, and post-operational maintenance and troubleshooting.
Any features not associated with SFRs in claimed [NDcPP] and [SSHPKG]	[NDcPP] and [SSHPKG] forbids adding additional requirements to the Security Target (ST). If additional functionalities are mentioned in the ST, it is for completeness only.

3. Security Problem Definition

This security target includes by reference the Security Problem Definition (composed of organizational policies, threat statements, and assumption) from [NDcPP].

In general, the [NDcPP] has presented a Security Problem Definition appropriate for network infrastructure devices, such as firewalls, and as such is applicable to the Palo Alto TOE. NOTE:

A.COMPONENTS_RUNNING is not applicable because this is not a distributed TOE. [NDcPP] also has virtualization assumptions that are not applicable here.

4. Security Objectives

Like the Security Problem Definition, this security target includes by reference the Security Objectives from the [NDcPP]. The security objectives for the operational environment are reproduced below, since these objectives characterize technical and procedural measures each consumer must implement in their operational environment. NOTE: OE.COMPONENTS_RUNNING is not applicable because this is not a distributed TOE. [NDcPP] also has a virtualization related objective (OE.VM_CONFIGURATION) that is not applicable here.

4.1 Security Objectives for the Operational Environment

OE.PHYSICAL	Physical security, commensurate with the value of the TOE and the data it contains, is provided by the environment.
OE.NO_GENERAL_PURPOSE	There are no general-purpose computing capabilities (e.g., compilers or user applications) available on the TOE, other than those services necessary for the operation, administration and support of the TOE. Note: For vNDs the TOE includes only the contents of the its own VM, and does not include other VMs or the VS.
OE.NO_THRU_TRAFFIC_PROTECTION	The TOE does not provide any protection of traffic that traverses it. It is assumed that protection of this traffic will be covered by other security and assurance measures in the operational environment.
OE.UPDATES	The TOE firmware and software is updated by an administrator on a regular basis in response to the release of product updates due to known vulnerabilities.
OE.ADMIN_CREDENTIALS_SECURE	The administrator's credentials (private key) used to access the TOE must be protected on any other platform on which they reside.
OE.TRUSTED_ADMIN	<p>Security Administrators are trusted to follow and apply all guidance documentation in a trusted manner.</p> <p>For TOEs supporting X.509v3 certificate-based authentication, the Security Administrator(s) are assumed to monitor the revocation status of all certificates in the TOE's trust store and to remove any certificate from the TOE's trust store in case such certificate can no longer be trusted.</p>
OE.RESIDUAL_INFORMATION	The Security Administrator ensures that there is no unauthorized access possible for sensitive residual information (e.g. cryptographic keys, keying material, PINs, passwords etc.) on networking equipment when the equipment is discarded or removed from its operational environment. For vNDs, this applies when the physical

platform on which the VM runs is removed from its operational environment.

5. IT Security Requirements

This section defines the Security Functional Requirements (SFRs) and Security Assurance Requirements (SARs) that serve to represent the security functional claims for the Target of Evaluation (TOE) and to scope the evaluation effort.

The SFRs have all been drawn from the [NDcPP] and [SSHPKG].

As a result, refinements and operations already performed in that PP and FP are not identified (e.g., highlighted) here, rather the requirements have been copied from that PP and any residual operations have been completed herein. Of particular note, the [NDcPP] and [SSHPKG] made a number of refinements and completed some of the SFR operations defined in the CC and that PP and FP should be consulted to identify those changes if necessary.

The SARs are the set of mandatory SARs and the optional ALC_FLR.3 specified in [NDcPP].

5.1 Extended Requirements

All the extended requirements in this ST have been drawn from the [NDcPP] and [SSHPKG] with optional ALC_FLR.3. The [NDcPP] and [SSHPKG] define all the extended SFRs (*_EXT) and since they are not redefined in this ST, the [NDcPP] and [SSHPKG] should be consulted for more information regarding those CC extensions.

5.2 TOE Security Functional Requirements

The following table identifies the SFRs that are satisfied by the Palo Alto TOE.

Table 3 TOE Security Functional Components

Requirement Class	Requirement Component
FAU: Security Audit	FAU_GEN.1: Audit Data Generation
	FAU_GEN.2: User Identity Association
	FAU_STG_EXT.1: Protected Audit Event Storage
	FAU_STG.1: Protected Audit Trail Storage
FCS: Cryptographic Support	FCS_CKM.1: Cryptographic Key Generation
	FCS_CKM.2: Cryptographic Key Establishment
	FCS_CKM.4: Cryptographic Key Destruction
	FCS_COP.1/DataEncryption: Cryptographic Operation (AES Data Encryption/Decryption)
	FCS_COP.1/SigGen: Cryptographic Operation (Signature Generation and Verification)
	FCS_COP.1/Hash: Cryptographic Operation (Hash Algorithm)

Requirement Class	Requirement Component
	FCS_COP.1/KeyedHash: Cryptographic Operation (Keyed Hash Algorithm)
	FCS_RBG_EXT.1: Random Bit Generation
	FCS_SSH_EXT.1: SSH Protocol
	FCS_SSHS_EXT.1: SSH Protocol - Server
	FCS_TLSC_EXT.1: TLS Client Protocol
	FCS_TLSS_EXT.1: TLS Server Protocol
	FCS_TLSS_EXT.2: TLS Server Support for Mutual Authentication
FIA: Identification and Authentication	FIA_AFL.1: Authentication Failure Handling
	FIA_PMG_EXT.1: Password Management
	FIA_UIA_EXT.1: User Identification and Authentication
	FIA_X509_EXT.1/Rev: X.509 Certificate Validation
	FIA_X509_EXT.2(1): X.509 Certificate Authentication (Syslog Connections)
	FIA_X509_EXT.2(2): X.509 Certificate Authentication (Firewall Connections)
	FIA_X509_EXT.3: X.509 Certificate Requests
FMT: Security Management	FMT_MOF.1/ManualUpdate: Management of Security Functions Behaviour
	FMT_MTD.1/CoreData: Management of TSF Data
	FMT_SMF.1: Specification of Management Functions
	FMT_SMR.2: Restrictions on Security Roles
FPT: Protection of the TSF	FPT_SKP_EXT.1: Protection of TSF Data (for reading of all symmetric keys)
	FPT_APW_EXT.1: Protection of Administrator Passwords
	FPT_STM_EXT.1: Reliable Time Stamps
	FPT_TST_EXT.1: TSF Testing
	FPT_TUD_EXT.1: Trusted Update
FTA: TOE Access	FTA_SSL.3: TSF-initiated Termination
	FTA_SSL.4: User-initiated Termination
	FTA_TAB.1: Default TOE Access Banners
FTP: Trusted Path/Channels	FTP_ITC.1: Inter-TSF Trusted channel
	FTP_TRP.1/Admin: Trusted Path

5.2.1 Security Audit (FAU)

FAU_GEN.1 – Audit Data Generation

FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:

- Start-up and shutdown of the audit functions;
- All auditable events for the not specified level of audit; and
- All administrative actions comprising:
 - Administrative login and logout (name of Administrator account shall be logged if individual accounts are required for Administrators).
 - Changes to TSF data related to configuration changes (in addition to the information that a change occurred it shall be logged what has been changed).
 - Generating/import of, changing, or deleting of cryptographic keys (in addition to the action itself a unique key name or key reference shall be logged).
 - [Resetting passwords (name of related administrator account shall be logged)];**
- Specifically defined auditable events listed in Table 4

FAU_GEN.1.2 The TSF shall record within each audit record at least the following information:

- Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and
- For each audit event type, based on the auditable event definitions of the functional components included in the cPP/ST, information specified in column three of Table 4.

Table 4 Auditable Events

Requirement	Auditable Events	Additional Audit Record Contents
FAU_GEN.1	None.	None.
FAU_GEN.2	None.	None.
FAU_STG_EXT.1	Configuration of local audit settings.	Identity of account making changes to the audit configuration.
FAU_STG.1	None.	None.
FCS_CKM.1	None.	None.
FCS_CKM.2	None.	None.
FCS_CKM.4	None.	None.
FCS_COP.1/DataEncryption	None.	None.
FCS_COP.1/SigGen	None.	None.
FCS_COP.1/Hash	None.	None.
FCS_COP.1/KeyedHash	None.	None.
FCS_RBG_EXT.1	None.	None
FCS_SSH_EXT.1	<ul style="list-style-type: none"> Failure to establish a SSH session. Establishment of SSH connection Termination of SSH connection session 	<ul style="list-style-type: none"> Reason for failure and Non-TOE endpoint of connection (IP Address) Non-TOE endpoint of connection (IP Address)

Requirement	Auditable Events	Additional Audit Record Contents
	<ul style="list-style-type: none"> None 	<ul style="list-style-type: none"> None
FCS_SSHS_EXT.1	None	None
FCS_TLSC_EXT.1	Failure to establish a TLS session.	Reason for failure
FCS_TLSS_EXT.1	Failure to establish a TLS session.	Reason for failure
FCS_TLSS_EXT.2	Failure to authenticate the client	Reason for failure
FIA_AFL.1	Unsuccessful login attempts limit is met or exceeded.	Origin of the attempt (e.g., IP address)
FIA_PMG_EXT.1	None.	None.
FIA_UIA_EXT.1	All use of identification and authentication mechanisms.	Origin of the attempt (e.g., IP address).
FIA_X509_EXT.1/Rev	<ul style="list-style-type: none"> Unsuccessful attempt to validate a certificate Any addition, replacement or removal of trust anchors¹ in the TOE's trust store 	<ul style="list-style-type: none"> Reason for failure of certificate validation Identification of certificates added, replaced or removed as trust anchor in the TOE's trust store
FIA_X509_EXT.2(1) FIA_X509_EXT.2(2)	None.	None.
FIA_X509_EXT.3	None.	None.
FMT_MOF.1/ManualUpdate	Any attempt to initiate a manual update	None.
FMT_MTD.1/CoreData	None.	None.
FMT_SMF.1	All management activities of TSF data.	None.
FMT_SMR.2	None.	None.
FPT_SKP_EXT.1	None.	None.
FPT_APW_EXT.1	None.	None.
FPT_TST_EXT.1	None.	None.
FPT_TUD_EXT.1	Initiation of update; result of the update attempt (success or failure)	None.
FPT_STM_EXT.1	Discontinuous changes to time - either Administrator actuated or changed via an automated process. (Note that no continuous changes to time need to be logged. See also application note on FPT_STM_EXT.1)	For discontinuous changes to time: The old and new values for the time. Origin of the attempt to change time for success and failure (e.g., IP address).

¹ Importing CA certificate(s) or generating CA certificate(s) internally will implicitly set them as trust anchor.

Requirement	Auditable Events	Additional Audit Record Contents
FTA_SSL.3	The termination of a remote session by the session locking mechanism.	None.
FTA_SSL.4	The termination of an interactive session.	None.
FTA_TAB.1	None.	None.
FTP_ITC.1	<ul style="list-style-type: none"> Initiation of the trusted channel. Termination of the trusted channel. Failure of the trusted channel functions. 	<ul style="list-style-type: none"> None None Reason for failure
FTP_TRP.1/Admin	<ul style="list-style-type: none"> Initiation of the trusted path. Termination of the trusted path. Failure of the trusted path functions. 	<ul style="list-style-type: none"> None None Reason for failure

FAU_GEN.2 – User Identity Association

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

FAU_STG_EXT.1 – Protected Audit Event Storage

- FAU_STG_EXT.1.1** The TSF shall be able to transmit the generated audit data to an external IT entity using a trusted channel according to FTP_ITC.1.
- FAU_STG_EXT.1.2** The TSF shall be able to store generated audit data on the TOE itself. In addition [
- TOE shall consist of a single standalone component that stores audit data locally**].
- FAU_STG_EXT.1.3** The TSF shall maintain a [log file] of audit records in the event that an interruption of communication with the remote audit server occurs.
- FAU_STG_EXT.1.4** The TSF shall be able to store [persistent] audit records locally with a minimum storage size of [45 MB].
- FAU_STG_EXT.1.5** The TSF shall [drop new audit data] when the local storage space for audit data is full.
- FAU_STG_EXT.1.6** The TSF shall provide the following mechanisms for administrative access to locally stored audit records [ability to view locally].

FAU_STG.1 – Protected Audit Trail Storage

FAU_STG.1.1 The TSF shall protect the stored audit records in the audit trail from unauthorized deletion.

FAU_STG.1.2 The TSF shall be able to prevent unauthorized modifications to the stored audit records in the audit trail.

5.2.2 Cryptographic Support (FCS)

FCS_CKM.1 – Cryptographic Key Generation

FCS_CKM.1.1 The TSF shall generate **asymmetric** cryptographic keys in accordance with a specified cryptographic key generation algorithm: [

- *RSA schemes using cryptographic key sizes of [2048-bits, 3072-bits, and 4096-bits] that meet the following: FIPS PUB 186-4, "Digital Signature Standard (DSS)", Appendix B.3 or FIPS PUB 186-5, "Digital Signature Standard (DSS)", A.1;*
- *ECC schemes using "NIST curves" [P-256, P-384, P-521] that meet the following: FIPS PUB 186-4, "Digital Signature Standard (DSS)", Appendix B.4 or FIPS PUB 186-5, "Digital Signature Standard (DSS)", Appendix A.2, or ISO/IEC 14888-3, "IT Security techniques - Digital signatures with appendix - Part 3: Discrete logarithm based mechanisms", Section 6.6.;*
- *FFC Schemes using 'safe-prime' groups that meet the following: "NIST Special Publication 800-56A Revision 3, Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography" and [RFC 3526].*

] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].

FCS_CKM.2 – Cryptographic Key Establishment

FCS_CKM.2.1 The TSF shall **perform** cryptographic **key establishment** in accordance with a specified cryptographic key **establishment** method: [

- *Elliptic curve-based key establishment schemes that meet the following: NIST Special Publication 800-56A Revision 3, "Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography";*
- *FFC Schemes using "safe-prime" groups that meet the following: 'NIST Special Publication 800-56A Revision 3, "Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography" and [groups listed in RFC 3526].*

] that meets the following: [assignment: list of standards].

FCS_CKM.4 – Cryptographic Key Destruction

FCS_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method

- *For plaintext keys in volatile storage, the destruction shall be executed by a [single overwrite consisting of [a pseudo-random pattern using the TSF's RBG]];*
- *For plaintext keys in non-volatile storage, the destruction shall be executed by the invocation of an interface provided by a part of the TSF that [logically addresses the storage location of the key and performs a [single, [three or more]-pass] overwrite consisting of [[alternating ones and zeroes]]]*

that meets the following: No Standard.

FCS_COP.1/DataEncryption – Cryptographic Operation (AES Data Encryption/Decryption)

FCS_COP.1.1/DataEncryption The TSF shall perform *encryption/decryption* in accordance with a specified cryptographic algorithm **AES** used in **[CBC, CTR, GCM]** mode and cryptographic key sizes **[128 bits, 256 bits]** that meet the following: *AES as specified in ISO 18033-3, [CBC as specified in ISO 10116, CTR as specified in ISO 10116, GCM as specified in ISO 19772]*.

FCS_COP.1/SigGen – Cryptographic Operation (Signature Generation and Verification)

FCS_COP.1.1/SigGen The TSF shall perform *cryptographic signature services (generation and verification)* in accordance with a specified cryptographic algorithm [

- **RSA Digital Signature Algorithm,**
- **Elliptic Curve Digital Signature Algorithm**

] and cryptographic key sizes [

- **For RSA: [modulus 2048 bits or greater],**
- **For ECDSA: [256 bits or greater]**

] that meet the following: [

- **For RSA schemes: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Section 5.5, using PKCS #1 v2.1 or FIPS PUB 186-5, “Digital Signature Standard (DSS)”, Section 5.4 using PKCS #1 v2.2 Signature Schemes RSASSA-PSS and/or RSASSA-PKCS1v1_5; ISO/IEC 9796-2, Digital signature scheme 2 or Digital Signature scheme 3,**
- **For ECDSA schemes implementing [P-256, P-384, P-521] curves that meet the following: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Section 6 and Appendix D, Implementing “NIST Recommended curves” or FIPS PUB 186-5, “Digital Signature Standard (DSS)”, Section 6 and NIST SP 800-186 Section 3.2.1, Implementing Weierstrass curves; or ISO/IEC 14888-3, “IT Security techniques - Digital signatures with appendix - Part 3: Discrete logarithm based mechanisms”, Section 6.6.**

].

FCS_COP.1/Hash – Cryptographic Operation (Hash Algorithm)

FCS_COP.1.1/Hash The TSF shall perform *cryptographic hashing services* in accordance with a specified cryptographic algorithm **[SHA-1, SHA-256, SHA-384, SHA-512]** and cryptographic key sizes ~~[assignment: cryptographic key sizes]~~ and message digest sizes **[160, 256, 384, 512]** bits that meet the following: *ISO/IEC 10118-3:2004*.

FCS_COP.1/KeyedHash – Cryptographic Operation (Keyed Hash Algorithm)

FCS_COP.1.1/KeyedHash The TSF shall perform *keyed-hash message authentication* in accordance with a specified cryptographic algorithm **[HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-384, HMAC-SHA-512, implicit]** and cryptographic key sizes **[160, 256, 384, 512]** and message digest sizes **[160, 256, 384, 512]** bits that meet the following: *ISO/IEC 9797-2:2011, Section 7 “MAC Algorithm 2”*.

FCS_RBG_EXT.1 – Random Bit Generation

- FCS_RBG_EXT.1.1** The TSF shall perform all deterministic random bit generation services in accordance with ISO/IEC 18031:2011 using **[CTR_DRBG (AES)]**.
- FCS_RBG_EXT.1.2** The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from **[[one] platform-based noise source]** with minimum of **[256 bits]** of entropy at least equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 “Security Strength Table for Hash Functions”, of the keys and hashes that it will generate.

FCS_SSH_EXT.1 – SSH Protocol

- FCS_SSH_EXT.1.1** The TSF shall implement SSH acting as a **[server]** in accordance with that complies with RFCs 4251, 4252, 4253, 4254, **[4256, 4344, 5647, 5656, 6668, 8308, 8332]** and **[no other standard]**.
- FCS_SSH_EXT.1.2** The TSF shall ensure that the SSH protocol implementation supports the following user authentication methods: [
- **“password” (RFC 4252),**
 - **“keyboard-interactive” (RFC 4256),**
 - **“publickey” (RFC 4252): [**
 - o **ssh-rsa (RFC 4253),**
 - o **rsa-sha2-256 (RFC 8332),**
 - o **rsa-sha2-512 (RFC 8332)****]**
-] and no other methods.**
- FCS_SSH_EXT.1.3** The TSF shall ensure that, as described in RFC 4253, packets greater than **[262,105]** bytes in an SSH transport connection are dropped.
- FCS_SSH_EXT.1.4** The TSF shall protect data in transit from unauthorised disclosure using the following mechanisms: [
- **aes128-cbc (RFC 4253),**
 - **aes256-cbc (RFC 4253),**
 - **aes128-ctr (RFC 4344),**
 - **aes256-ctr (RFC 4344),**
 - **aes128-gcm@openssh.com (RFC 5647),**
 - **aes256-gcm@openssh.com (RFC 5647)**
-] and no other mechanisms.**
- FCS_SSH_EXT.1.5** The TSF shall protect data in transit from modification, deletion, and insertion using: [
- **hmac-sha2-256 (RFC 6668),**
 - **hmac-sha2-512 (RFC 6668),**
 - **implicit**
-] and no other mechanisms.**
- FCS_SSH_EXT.1.6** The TSF shall establish a shared secret with its peer using: [
- **ecdh-sha2-nistp256 (RFC 5656),**
 - **ecdh-sha2-nistp384 (RFC 5656),**
 - **ecdh-sha2-nistp521 (RFC 5656)**
-] and no other mechanisms.**
- FCS_SSH_EXT.1.7** The TSF shall use SSH KDF as defined in [

- **RFC 5656 (Section 4)**

] to derive the following cryptographic keys from a shared secret: *session keys*.

FCS_SSH_EXT.1.8

The TSF shall ensure that [

- ***a rekey of the session keys***

] occurs when any of the following thresholds are met:

- one hour connection time
- no more than one gigabyte of transmitted data, or
- no more than one gigabyte of received data.

FCS_SSHS_EXT.1 – SSH Protocol - Server

FCS_SSHS_EXT.1.1

The TSF shall authenticate itself to its peer (SSH Client) using: [

- *ssh-rsa (RFC 4253),*
- *rsa-sha2-256 (RFC 8332),*
- *rsa-sha2-512 (RFC 8332),*
- *ecdsa-sha2-nistp256 (RFC 5656),*
- *ecdsa-sha2-nistp384 (RFC 5656),*
- *ecdsa-sha2-nistp521 (RFC 5656)*

].

FCS_TLSC_EXT.1 - TLS Client Protocol

FCS_TLSC_EXT.1.1

The TSF shall implement [TLS 1.2 (RFC 5246)] supporting the following ciphersuites:

[

- *TLS_DHE_RSA_WITH_AES_128_CBC_SHA as defined in RFC 3268*
- *TLS_DHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC 3268*
- *TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA as defined in RFC 8422*
- *TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC 8422*
- *TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA as defined in RFC 8422*
- *TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA as defined in RFC 8422*
- *TLS_DHE_RSA_WITH_AES_128_CBC_SHA256 as defined in RFC 5246*
- *TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 as defined in RFC 5246*
- *TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256 as defined in RFC 5289*
- *TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384 as defined in RFC 5289*
- *TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289*
- *TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289*
- *TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289*
- *TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289*

] and no other ciphersuites.

FCS_TLSC_EXT.1.2

The TSF shall verify that the presented identifiers matches [*the reference identifier per RFC 6125 Section 6*] and no other attribute types].

FCS_TLSC_EXT.1.3

The TSF shall not establish a trusted channel if the server certificate is invalid [

- ***without any administrator override mechanism***].

- FCS_TLSC_EXT.1.4** The TSF shall *[present the Supported Groups Extension with the following curves/groups: [secp256r1, secp384r1, secp521r1] and no other curves/groups]* in the Client Hello.
- FCS_TLSC_EXT.1.5** The TSF shall [
 - *present the signature_algorithms extension with support for the following algorithms:*
 - o *rsa_pkcs1 with sha256(0x0401),*
 - o *rsa_pkcs1with sha384(0x0501),*
 - o *rsa_pkcs1 with sha512(0x0601),*
 - o *ecdsa_secp256r1 with sha256(0x0403),*
 - o *ecdsa_secp384r1 with sha384(0x0503),*
 - o *ecdsa_secp521r1 with sha512(0x0603),*
 - o *rsa_pss_rsae with sha256(0x0804),*
 - o *rsa_pss_rsae with sha384(0x0805),*
 - o *rsa_pss_rsae with sha512(0x0806),**] and no other algorithms;*
].
- FCS_TLSC_EXT.1.6** The TSF *[does not provide]* the ability to configure the list of supported ciphersuites as defined in FCS_TLSC_EXT.1.1.
- FCS_TLSC_EXT.1.7** The TSF shall prohibit the use of the following extensions:
 - Early data extension
 - Post-handshake client authentication according to RFC 8446, Section 4.2.6.
- FCS_TLSC_EXT.1.8** The TSF shall *[not use PSKs]*.
- FCS_TLSC_EXT.1.9** The TSF shall *[reject [TLS 1.2] renegotiation attempts]*.

FCS_TLSS_EXT.1 - TLS Server Protocol

- FCS_TLSS_EXT.1.1** The TSF shall implement *[TLS 1.2 (RFC 5246)]* and reject all other TLS and SSL versions. The TLS implementation will support the following ciphersuites:
[
 - *TLS_DHE_RSA_WITH_AES_128_SHA as defined in RFC 5246*
 - *TLS_DHE_RSA_WITH_AES_256_SHA as defined in RFC 5246*
 - *TLS_DHE_RSA_WITH_AES_128_CBC_SHA256 as defined in RFC 5246*
 - *TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 as defined in RFC 5246*
 - *TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289*
 - *TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289*
 - *TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289*
 - *TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289*
 - *TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA as defined in RFC 8422*
 - *TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC 8422*

] and no other ciphersuites.

- FCS_TLSS_EXT.1.2** The TSF shall authenticate itself using X.509 certificate(s) using *[RSA with key size [2048, 3072, 4096] bits; ECDSA over NIST curves [secp256r1, secp384r1, secp521r1] and no other curves]*.
- FCS_TLSS_EXT.1.3** The TSF shall perform key exchange using: [
- *EC Diffie-Hellman key agreement over NIST curves [secp256r1, secp384r1, secp521r1] and no other curves;*
 - *Diffie-Hellman parameters [of size 2048 bits]*
-].
- FCS_TLSS_EXT.1.4** The TSF shall support *[session resumption based on session tickets according to RFC 5077 (TLS 1.2)]*.
- FCS_TLSS_EXT.1.5** The TSF *[does not provide]* the ability to configure the list of supported ciphersuites as defined in FCS_TLSS_EXT.1.1.
- FCS_TLSS_EXT.1.6** The TSF shall prohibit the use of the following extensions:
- Early data extension
- FCS_TLSS_EXT.1.7** The TSF shall *[not use PSKs]*.
- FCS_TLSS_EXT.1.8** The TSF shall *[reject [TLS 1.2] renegotiation attempts]*.

FCS_TLSS_EXT.2 - TLS Server Support for Mutual Authentication

- FCS_TLSS_EXT.2.1** The TSF shall support TLS communication with mutual authentication of TLS clients using X.509v3 certificates and shall [
- *reject the connection if the client either does not provide a client certificate at all or the client certificate cannot be successfully validated by the TOE (except for override mechanisms that might be defined in FCS_TLSS_EXT.2.2) ('hard fail')*
-].
- FCS_TLSS_EXT.2.2** When establishing a trusted channel, by default the TSF shall not establish a trusted channel if the client certificate is invalid. The TSF shall also [
- *not implement any administrator override mechanism*
-].
- FCS_TLSS_EXT.2.3** The TSF shall not establish a trusted channel if the identifier contained in a certificate does not match an expected identifier for the client. If the identifier is a Fully Qualified Domain Name (FQDN), then the TSF shall match the identifiers according to RFC 6125, otherwise the TSF shall parse the identifier from the certificate and match the identifier against the expected identifier of the client as described in the TSS.
- FCS_TLSS_EXT.2.4** The TSF shall present a *[TLS 1.2]* Certificate Request message containing the following algorithms: [
- *rsa_pkcs1 with sha256(0x0401),*
 - *rsa_pkcs1 with sha384(0x0501),*
 - *rsa_pkcs1 with sha512(0x0601),*

- *ecdsa_secp256r1 with sha256(0x0403),*
 - *ecdsa_secp384r1 with sha384(0x0503),*
-] and no other algorithms.

5.2.3 Identification and Authentication (FIA)

FIA_AFL.1 – Authentication Failure Handling

- FIA_AFL.1.1** The TSF shall detect when an Administrator configurable positive integer within [1 – 10] unsuccessful authentication attempts occur related to *Administrators attempting to authenticate remotely using a password.*
- FIA_AFL.1.2** When the defined number of unsuccessful authentication attempts has been met, the TSF shall [***prevent the offending Administrator from successfully establishing remote session using any authentication method that involves a password until an Administrator defined time period has elapsed***].

FIA_PMG_EXT.1 – Password Management

- FIA_PMG_EXT.1.1** The TSF shall provide the following password management capabilities for administrative passwords:
1. Passwords shall be able to be composed of any combination of upper and lower case letters, numbers, and the following special characters: [“!”, “@”, “#”, “\$”, “%”, “^”, “&”, “*”, “(”, “)”, “[”, “]”, “+”, “=”, “-”, “.”, “/”, “:”, “;”, “<”, “=”, “>”, “[”, “\”, “]”, “_”, “{”, “}”, “~”, and “***all Unicode characters***”];
 2. Minimum password length shall be configurable to between [8] and [15] characters.

FIA_UIA_EXT.1 – User Identification and Authentication

- FIA_UIA_EXT.1.1** The TSF shall allow the following actions prior to requiring the non-TOE entity to initiate the identification and authentication process:
- Display the warning banner in accordance with FTA_TAB.1;
 - ***[[ICMP]]***.
- FIA_UIA_EXT.1.2** The TSF shall require each administrative user to be successfully identified and authenticated before allowing any other TSF-mediated actions on behalf of that administrative user.
- FIA_UIA_EXT.1.3** The TSF shall provide the following remote authentication mechanisms [***SSH password, SSH public key***] and [***no other mechanism***]. The TSF shall provide the following local authentication mechanisms [***none***].
- FIA_UIA_EXT.1.4** The TSF shall authenticate any administrator user’s claimed identity according to each mechanism specified in FIA_UIA_EXT.1.3.

FIA_X509_EXT.1/Rev – X.509 Certificate Validation

- FIA_X509_EXT.1.1/Rev** The TSF shall validate certificates in accordance with the following rules:
- RFC 5280 certificate validation and certificate path validation **supporting a minimum path length of three certificates.**

- The certificate path must terminate with a trusted CA certificate as a trust anchor.
- The TSF shall validate a certification path by ensuring that all CA certificates in the certification path contain the basicConstraints extension with the CA flag set to TRUE.
- The TSF shall validate the revocation status of the certificate using [**the Online Certificate Status Protocol (OCSP) as specified in RFC 6960, a Certificate Revocation List (CRL) as specified in RFC 5280 Section 6.3, Certificate Revocation List (CRL) as specified in RFC 5759 Section 5**].
- The TSF shall validate the extendedKeyUsage field according to the following rules:
 - o *Certificates used for trusted updates and executable code integrity verification shall have the Code Signing purpose (id-kp 3 with OID 1.3.6.1.5.5.7.3.3) in the extendedKeyUsage field.*
 - o *Server certificates presented for DTLS/TLS shall have the Server Authentication purpose (id-kp 1 with OID 1.3.6.1.5.5.7.3.1) in the extendedKeyUsage field.*
 - o *Client certificates presented for DTLS/TLS shall have the Client Authentication purpose (id-kp 2 with OID 1.3.6.1.5.5.7.3.2) in the extendedKeyUsage field.*
 - o *OCSP certificates presented for OCSP responses shall have the OCSP Signing purpose (id-kp 9 with OID 1.3.6.1.5.5.7.3.9) in the extendedKeyUsage field.*

FIA_X509_EXT.1.2/Rev The TSF shall only treat a certificate as a CA certificate if the basicConstraints extension is present and the CA flag is set to TRUE.

FIA_X509_EXT.2(1) – X.509 Certificate Authentication (Syslog Connection)

FIA_X509_EXT.2.1(1) The TSF shall use X.509v3 certificates as defined by RFC 5280 to support authentication for [**TLS**], and [**no additional uses**].

FIA_X509_EXT.2.2(1) When the TSF cannot establish a connection to determine the validity of a certificate, the TSF shall [**not accept the certificate**].

FIA_X509_EXT.2(2) – X.509 Certificate Authentication (Firewall Connections)

FIA_X509_EXT.2.1(2) The TSF shall use X.509v3 certificates as defined by RFC 5280 to support authentication for [**TLS**], and [**no additional uses**].

FIA_X509_EXT.2.2(2) When the TSF cannot establish a connection to determine the validity of a certificate, the TSF shall [**allow the Administrator to choose whether to accept the certificate in these cases**].

FIA_X509_EXT.3 – X.509 Certificate Requests

FIA_X509_EXT.3.1 The TSF shall generate a Certificate Request as specified by RFC 2986 and be able to provide the following information in the request: public key and [**Common Name, Organization, Country**].

FIA_X509_EXT.3.2 The TSF shall validate the chain of certificates from the Root CA upon receiving the CA Certificate Response.

5.2.4 Security Management (FMT)

FMT_MOF.1/ManualUpdate - Management of Security Functions Behaviour

FMT_MOF.1.1/ManualUpdate The TSF shall restrict the ability to enable the functions to perform manual updates to Security Administrators.

FMT_MTD.1/CoreData – Management of TSF Data

FMT_MTD.1.1/CoreData The TSF shall restrict the ability to manage the TSF data to Security Administrators.

FMT_SMF.1 – Specification of Management Functions

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions:

- Ability to administer the TOE remotely;
 - Ability to configure the access banner;
 - Ability to configure the remote session inactivity time before session termination;
 - Ability to update the TOE, and to verify the updates using digital signature capability prior to installing those updates;
- [
- o Ability to configure the list of TOE-provided services available before an entity is identified and authenticated, as specified in FIA_UIA_EXT.1;
 - o Ability to configure the cryptographic functionality;
 - o Ability to configure thresholds for SSH rekeying;
 - o Ability to set the time which is used for time-stamps;
 - o Ability to manage the TOE's trust store and designate X.509v3 certificates as trust anchors;
 - o Ability to generate Certificate Signing Request (CSR) and process CA certificate response;
 - o Ability to configure the authentication failure parameters for FIA_AFL.1;
 - o Ability to manage the trusted public keys database;
-].

FMT_SMR.2 – Restrictions on Security Roles

FMT_SMR.2.1 The TSF shall maintain the roles:

- Security Administrator.

FMT_SMR.2.2 The TSF shall be able to associate users with roles.

FMT_SMR.2.3 The TSF shall ensure that the conditions

- The Security Administrator role shall be able to administer the TOE remotely are satisfied.

5.2.5 Protection of the TSF (FPT)

FPT_SKP_EXT.1 – Protection of TSF Data (for reading of all symmetric keys)

FPT_SKP_EXT.1.1 The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys.

FPT_APW_EXT.1 – Protection of Administrator Passwords

- FPT_APW_EXT.1.1 The TSF shall store administrative passwords in non-plaintext form.
- FPT_APW_EXT.1.2 The TSF shall prevent the reading of plaintext administrative passwords.

FPT_STM_EXT.1 – Reliable Time Stamps

- FPT_STM_EXT.1.1 The TSF shall be able to provide reliable time stamps for its own use.
- FPT_STM_EXT.1.2 The TSF shall [*allow the Security Administrator to set the time*].

FPT_TST_EXT.1 – TSF Testing

- FPT_TST_EXT.1.1 The TSF shall run a suite of the following self-tests:
- During initial start-up (on power on) to verify the integrity of the TOE firmware and software;
 - Prior to providing any cryptographic service and [*on-demand*] to verify correct operation of cryptographic implementation necessary to fulfil the TSF;
 - [*start-up*] self-tests [
 - *AES Encrypt Known Answer Test*
 - *AES Decrypt Known Answer Test*
 - *AES GCM Encrypt Known Answer Test*
 - *AES GCM Decrypt Known Answer Test*
 - *AES CCM Encrypt Known Answer Test*
 - *AES CCM Decrypt Known Answer Test*
 - *RSA Sign Known Answer Test*
 - *RSA Verify Known Answer Test*
 - *RSA Encrypt/Decrypt Known Answer Test*
 - *ECDSA Sign Known Answer Test*
 - *ECDSA Verify Known Answer Test*
 - *HMAC-SHA-1 Known Answer Test*
 - *HMAC-SHA-256 Known Answer Test*
 - *HMAC-SHA-384 Known Answer Test*
 - *HMAC-SHA-512 Known Answer Test*
 - *SHA-1 Known Answer Test*
 - *SHA-256 Known Answer Test*
 - *SHA-384 Known Answer Test*
 - *SHA-512 Known Answer Test*
 - *DRBG SP800-90A Known Answer Tests*
 - *SP 800-90A Section 11.3 Health Tests*
 - *DH Known Answer Test*
 - *ECDH Known Answer Test*
 - *SP 800-135 KDF Known Answer Tests*
 - *Firmware Integrity Test*
 - *Pairwise Consistency Tests*
 - *SP 800-90B Entropy Health Tests*].
- to demonstrate the correct operation of the TSF.

Application Note: Modified per TD0836.

FPT_TST_EXT.1.2 The TSF shall respond to [all failures] by [entering an error state called maintenance mode].

FPT_TUD_EXT.1 – Trusted Update

FPT_TUD_EXT.1.1 The TSF shall provide *Security Administrators* the ability to query the currently executing version of the TOE firmware/software and [**no other TOE firmware/software version**].

FPT_TUD_EXT.1.2 The TSF shall provide *Security Administrators* the ability to manually initiate updates to TOE firmware/software and [**no other update mechanism**].

FPT_TUD_EXT.1.3 The TSF shall provide means to authenticate firmware/software updates to the TOE using a [**digital signature**] prior to installing those updates.

5.2.6 TOE Access (FTA)

FTA_SSL.3 – TSF-initiated Termination

FTA_SSL.3.1 The TSF shall terminate a **remote** interactive session after a *Security Administrator-configurable time interval of session inactivity*.

FTA_SSL.4 – User-initiated Termination

FTA_SSL.4.1 The TSF shall allow ~~user~~ **Administrator**-initiated termination of the ~~user's~~ **Administrator's** own interactive session.

FTA_TAB.1 – Default TOE Access Banners

FTA_TAB.1.1 Before establishing a ~~an~~ **administrative user** session the TSF shall display a **Security Administrator-specified advisory notice and consent** warning message regarding ~~unauthorised~~ use of the TOE.

5.2.7 Trusted Path/Channels (FTP)

FTP_ITC.1 – Inter-TSF Trusted Channel

FTP_ITC.1.1 The TSF shall **be capable of using [TLS]** to provide a trusted communication channel between itself and ~~another trusted IT product~~ **authorized IT entities supporting the following capabilities: audit server, [Firewall]** that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from ~~modification or disclosure~~ **and detection of modification of the channel data**.

FTP_ITC.1.2 The TSF shall permit [**the TSF, the authorized IT entities**] to initiate communication via the trusted channel.

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for [

- **transmitting audit records to an audit server using TLS**].

FTP_TRP.1/Admin – Trusted Path

- | | |
|--------------------------|--|
| FTP_TRP.1.1/Admin | The TSF shall be capable of using [SSH] to provide a communication path between itself and authorized <u>remote Administrators users</u> that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from <u>disclosure</u> and provides detection of modification of the channel data. |
| FTP_TRP.1.2/Admin | The TSF shall permit <u>remote Administrators users</u> to initiate communication via the trusted path. |
| FTP_TRP.1.3/Admin | The TSF shall require the use of the trusted path for <u>initial Administrator authentication and all remote administrative actions.</u> |

5.3 TOE Security Assurance Requirements

The security assurance requirements for the TOE are included by reference to [NDcPP] and optional ALC_FLR.3.

Table 5 Assurance Components

Requirement Class	Requirement Component
ADV: Development	ADV_FSP.1: Basic functional specification
AGD: Guidance Documents	AGD_OPE.1: Operational user guidance
	AGD_PRE.1: Preparative procedures
ALC: Life-Cycle Support	ALC_CMC.1: Labelling of the TOE
	ALC_CMS.1: TOE CM coverage
	ALC_FLR.3: Systematic flaw remediation
ASE: Security Target Evaluation	ASE_INT.1: ST introduction
	ASE_CCL.1: Conformance claims
	ASE_SPD.1: Security problem definition
	ASE_OBJ.1: Security objectives for the operational environment
	ASE_ECD.1: Extended components definition
	ASE_REQ.1: Stated security requirements
	ASE_TSS.1: TOE summary specification
ATE: Tests	ATE_IND.1: Independent testing - conformance
AVA: Vulnerability Assessment	AVA_VAN.1: Vulnerability survey

Consequently, the evaluation activities specified in the following Supporting Documents apply to the TOE evaluation:

- Supporting Document Mandatory Technical Document: Evaluation Activities for Network Device cPP, 6 December-2023, Version 3.0e
- Functional Package for Secure Shell (SSH), Version 1.0, May 13, 2021

6. TOE Summary Specification

This chapter describes the security functions:

- Security Audit
- Cryptographic Support
- Identification and Authentication
- Security Management
- Protection of the TSF
- TOE Access
- Trusted Path/Channels

6.1 Security Audit

FAU_GEN.1	<p>The TOE is designed to be able to generate log records for security-relevant events as they occur. The events that can cause an audit record to be logged include starting and stopping the audit function (also startup and shutdown of system), any use of an administrator command via the CLI, as well as all of the events identified in Table 4 (which corresponds to the audit events specified in the [NDcPP] and [SSHPKG].</p> <p>All log records include the following contents: date/time, event type, user ID (i.e., username, IP address) or component (i.e., ssh, syslog), and description of the event including success or failure. For user-initiated actions, the User ID is included in the log records. For cryptographic key operations, the key name—or certificate name if the key is embedded in certificate or certificate request—is also logged. Furthermore, based on the event, the description of the event will include additional information as required in Table 4. Please refer to the CC AGD [CCECG] for the complete list of mandated audit logs and contents.</p>
FAU_GEN.2	<p>The TOE identifies the responsible user for each event based on the specific username and/or network entity (identified by source IP address) that caused the event.</p>
FAU_STG_EXT.1 FAU_STG.1	<p>The audit trail generated by the TOE comprises several logs, which are locally stored in the TOE file system on the hard disk:</p> <ul style="list-style-type: none">• Configuration logs—include events such as when an administrator configures the device, user management, cryptographic functions, audit functions (e.g., enable syslog over TLS connection), and when an administrator configures which events gets audited.• System logs—include events such as user login and logout, session establishment, termination, and failures. <p>The TOE stores the audit records locally and protects them from unauthorized deletion by allowing only users in the pre-defined Audit Administrator role to access the audit trail with delete privileges. The pre-defined Audit Administrator role is part of the Security Administrator role as defined by the [NDcPP]. The TOE is a single standalone component that stores audit data locally. The TOE does not provide an interface where a user can modify the audit records, thus it prevents modification to the audit records. When a log reaches the maximum size (at least 45 MB), the TOE drops new audit data. Maximum disk space is dependent on the customer's installation as it depends on the number of hard drives installed on the system.</p> <p>The TOE can be configured to send generated audit records to an external Syslog server in real-time using TLS. When configured to send audit records to a syslog server, audit</p>

	records are also written to the external syslog as they are written locally to the internal logs. The locally stored audit records can be viewed via the CLI.
--	---

6.2 Cryptographic Support

FCS_CKM.1	The TOE includes NIST-validated cryptographic algorithms provided by Palo Alto Networks Crypto Module supporting the cryptographic functions below. The following functions have been certified in accordance with the identified standards.		
FCS_CKM.2			
FCS_COP.1/*			
FCS_RBG_EXT.1			
	Table 6 Cryptographic Functions		
	Functions	Standards	Certificates
	Asymmetric Key Generation (FCS_CKM.1)		
	ECC key pair generation (NIST curves P-256, P-384, P-521) Note that TLS and SSH each use any of P-256, P-384, or P-521, and certificate generation uses only P-256 or P-384.	FIPS PUB 186-4	Safe Primes Key Generation #A3453 ECDSA #A3453 RSA #A3453
	RSA key generation (key sizes 2048, 3072, 4096 bits) Note that TLS uses 2048-bit RSA keys while certificate and SSH RSA key pair generation use 2048, 3072, or 4096-bit keys.	FIPS PUB 186-4	
	FFC Schemes using Diffie-Hellman groups that meet the following: RFC 3526 and SP 800-56Ar3 (2048-bit MODP)	RFC 3526 NIST SP 800-56Ar3	
	Cryptographic Key Establishment (FCS_CKM.2)		
	ECDSA based key establishment (NIST P-256, P-384, P-521)	NIST SP 800-56Ar3	ECC #A3453 FFC #A3453
	FFC-based Key establishment scheme using Diffie-Hellman groups that meet the following: RFC 3526 and SP 800-56Ar3 (2048-bit MODP)	RFC 3526 NIST SP 800-56Ar3	

AES Data Encryption/Decryption (FCS_COP.1/DataEncryption)		
AES CBC, CTR, GCM (128, 256 bits)	AES as specified in ISO 18033-3 CBC as specified in ISO 10116 CTR as specified in ISO 10116 GCM as specified in ISO 19772	AES #A3453
Signature Generation and Verification (FCS_COP.1/SigGen)		
RSA Digital Signature Algorithm (rDSA) (modulus 2048, 3072, 4096)	FIPS PUB 186-4, "Digital Signature Standard (DSS)", Section 5.5, using PKCS #1 v2.1 Signature Schemes RSASSA-PSS and/or RSASSAPKCS1v1_5; ISO/IEC 9796-2, Digital signature scheme 2 or Digital Signature scheme 3	RSA #A3453
ECDSA (NIST curves P-256, P-384, and P-521)	FIPS PUB 186-4, "Digital Signature Standard (DSS)", Section 6 and Appendix D, Implementing "NIST curves" P-256, P-384, ISO/IEC 14888-3, Section 6.4	ECDSA #A3453
Cryptographic Hashing (FCS_COP.1/Hash)		
SHA-1, SHA-256, SHA-384 and SHA-512 (digest sizes 160, 256, 384 and 512 bits)	ISO/IEC 10118-3:2004	SHS #A3453
Keyed-hash Message Authentication (FCS_COP.1/KeyedHash)		
<ul style="list-style-type: none"> • HMAC-SHA-1 (key size 160 bits and digest size 160 bits) • HMAC-SHA-256 (key size 256 bits and digest size 256 bits) • HMAC-SHA-384 (key size 384 bits and digest size 384 bits) • HMAC-SHA-512 (key size 512 bits and digest size 512 bits) 	ISO/IEC 9797-2:2011	HMAC #A3453
Random Bit Generation (FCS_RBG_EXT.1)		

	CTR_DRBG (AES) from a platform based noise source of 256 bits of non-determinism	ISO/IEC 18031:2011	DRBG #A3453																								
	<p>The TOE implements the ISO/IEC 18031:2011 Deterministic Random Bit Generator (DRBG) based on the AES 256 block cipher in counter mode (CTR_DRBG(AES)). The TOE instantiates the DRBG with maximum security strength, obtaining the 256 bits of entropy from a proprietary hardware entropy source to seed the DRBG. The entropy source is described in the proprietary Entropy Design document.</p> <p>The TOE generates asymmetric cryptographic keys used for key establishment in accordance with FIPS PUB 186-4, "Digital Signature Standard (DSS)", Appendix B.3 for RSA schemes, FIPS PUB 186-4, "Digital Signature Standard (DSS)", Appendix B.4 for ECC schemes, and Diffie-Hellman Groups according to RFC 3526.</p> <p>While the TOE generally fulfills all of the FIPS PUB 186-4 requirements without extensions, the following table specifically identifies the "should", "should not", and "shall not" conditions from the publication along with an indication of whether the TOE conforms to those conditions with deviations rationalized. Key generation is among the identified sections.</p> <p style="text-align: center;">Table 7 FIPS 186-4 Conformance</p> <table border="1"> <thead> <tr> <th>FIPS PUB 186-4</th><th>"should", "should not", or "shall not"</th><th>Implemented accordingly?</th><th>Rationale for deviation</th></tr> </thead> <tbody> <tr> <td>FIPS PUB 186-4 Appendix B.3</td><td></td><td></td><td></td></tr> <tr> <td>B.3.1</td><td>shall not</td><td>Yes</td><td>N/A</td></tr> <tr> <td>FIPS PUB 186-4 Appendix B.4</td><td></td><td></td><td></td></tr> <tr> <td>B.4.1</td><td>Should</td><td>Yes</td><td>N/A</td></tr> <tr> <td>B.4.2</td><td>Should</td><td>Yes</td><td>N/A</td></tr> </tbody> </table> <p>The TOE performs cryptographic key establishment in accordance with NIST Special Publication 800-56A for elliptic curve-based key establishment schemes, and NIST Special Publication 800-56A for finite field-based key establishment schemes. The TOE acts as both a sender and as a recipient for elliptic curve-based, and finite field-based key establishment schemes. For TLS, the domain parameters used for the finite field-based key establishment scheme are compliance with FIPS 186-4. For SSH, the ECC key establishment only. NOTE: RFC 7919 (FFDHE) is not supported.</p> <p>The claimed key generation and key establishment algorithms used for each function is summarized below.</p> <p>FCS_CKM.1:</p> <ul style="list-style-type: none"> - X.509 key pair generation: ECDSA (256, 384), RSA (2048, 3072, 4096) - SSH RSA key pair generation: RSA (2048, 3072, 4096) - SSH: ECDSA (256, 384, 521) - TLS: ECC (256, 384, 521), FFC (2048) 			FIPS PUB 186-4	"should", "should not", or "shall not"	Implemented accordingly?	Rationale for deviation	FIPS PUB 186-4 Appendix B.3				B.3.1	shall not	Yes	N/A	FIPS PUB 186-4 Appendix B.4				B.4.1	Should	Yes	N/A	B.4.2	Should	Yes	N/A
FIPS PUB 186-4	"should", "should not", or "shall not"	Implemented accordingly?	Rationale for deviation																								
FIPS PUB 186-4 Appendix B.3																											
B.3.1	shall not	Yes	N/A																								
FIPS PUB 186-4 Appendix B.4																											
B.4.1	Should	Yes	N/A																								
B.4.2	Should	Yes	N/A																								

	<p>FCS_CKM.2:</p> <ul style="list-style-type: none">- SSH: ECC (256, 384, 521)- TLS: ECC (256, 384, 521), FFC (2048) <p>The SHA-2 hash function is associated with the digital signature generation/verification and corresponding HMAC functions. SHA-256 is also used for hashing the administrator password for storage. SHA-1 is used as part of ssh-rsa authentication and TLS client ciphersuites integrity.</p>																																												
FCS_CKM.4	<table><tr><th colspan="4">Table 8 Private Keys and CSPs</th></tr><tr><th>CSP #</th><th>CSP/Key Name</th><th>Type</th><th>Description</th></tr><tr><td>1</td><td>RSA Private Keys</td><td>RSA</td><td>RSA Private keys for verification of signatures or authentication. (RSA 2048, 3072, or 4096-bit)</td></tr><tr><td>2</td><td>ECDSA Private Keys</td><td>ECDSA</td><td>ECDSA Private key for verification of signatures and authentication (P-256, P-384, P-521)</td></tr><tr><td>3</td><td>TLS Pre-Master Secret</td><td>TLS Secret</td><td>Secret value used to derive the TLS session keys</td></tr><tr><td>4</td><td>TLS DHE/ECDHE Private Components</td><td>DH</td><td>Diffie-Hellman private FFC or EC component used in TLS (DHE 2048, ECDHE P-256, P-384, P-521)</td></tr><tr><td>5</td><td>TLS HMAC Keys</td><td>HMAC</td><td>TLS integrity and authentication session keys (HMAC-SHA-1, HMAC-SHA2-256, HMAC-SHA2-384)</td></tr><tr><td>6</td><td>TLS Encryption Keys</td><td>AES</td><td>TLS encryption session keys (128 and 256 CBC or GCM)</td></tr><tr><td>7</td><td>SSH Session Integrity Keys</td><td>HMAC</td><td>Used in all SSH connections to the security module's command line interface. (HMAC-SHA2-256, HMAC-SHA2-512)</td></tr><tr><td>8</td><td>SSH Session Encryption Keys</td><td>AES</td><td>Used in all SSH connections to the security module's command line interface. (128 and 256 bits in CBC and CTR, or 128 and 256 bits in GCM)</td></tr><tr><td>9</td><td>SSH ECDH Private Components</td><td>ECDH</td><td>ECDH and private component (ECDH P-256, P-384, P-521)</td></tr></table>	Table 8 Private Keys and CSPs				CSP #	CSP/Key Name	Type	Description	1	RSA Private Keys	RSA	RSA Private keys for verification of signatures or authentication. (RSA 2048, 3072, or 4096-bit)	2	ECDSA Private Keys	ECDSA	ECDSA Private key for verification of signatures and authentication (P-256, P-384, P-521)	3	TLS Pre-Master Secret	TLS Secret	Secret value used to derive the TLS session keys	4	TLS DHE/ECDHE Private Components	DH	Diffie-Hellman private FFC or EC component used in TLS (DHE 2048, ECDHE P-256, P-384, P-521)	5	TLS HMAC Keys	HMAC	TLS integrity and authentication session keys (HMAC-SHA-1, HMAC-SHA2-256, HMAC-SHA2-384)	6	TLS Encryption Keys	AES	TLS encryption session keys (128 and 256 CBC or GCM)	7	SSH Session Integrity Keys	HMAC	Used in all SSH connections to the security module's command line interface. (HMAC-SHA2-256, HMAC-SHA2-512)	8	SSH Session Encryption Keys	AES	Used in all SSH connections to the security module's command line interface. (128 and 256 bits in CBC and CTR, or 128 and 256 bits in GCM)	9	SSH ECDH Private Components	ECDH	ECDH and private component (ECDH P-256, P-384, P-521)
Table 8 Private Keys and CSPs																																													
CSP #	CSP/Key Name	Type	Description																																										
1	RSA Private Keys	RSA	RSA Private keys for verification of signatures or authentication. (RSA 2048, 3072, or 4096-bit)																																										
2	ECDSA Private Keys	ECDSA	ECDSA Private key for verification of signatures and authentication (P-256, P-384, P-521)																																										
3	TLS Pre-Master Secret	TLS Secret	Secret value used to derive the TLS session keys																																										
4	TLS DHE/ECDHE Private Components	DH	Diffie-Hellman private FFC or EC component used in TLS (DHE 2048, ECDHE P-256, P-384, P-521)																																										
5	TLS HMAC Keys	HMAC	TLS integrity and authentication session keys (HMAC-SHA-1, HMAC-SHA2-256, HMAC-SHA2-384)																																										
6	TLS Encryption Keys	AES	TLS encryption session keys (128 and 256 CBC or GCM)																																										
7	SSH Session Integrity Keys	HMAC	Used in all SSH connections to the security module's command line interface. (HMAC-SHA2-256, HMAC-SHA2-512)																																										
8	SSH Session Encryption Keys	AES	Used in all SSH connections to the security module's command line interface. (128 and 256 bits in CBC and CTR, or 128 and 256 bits in GCM)																																										
9	SSH ECDH Private Components	ECDH	ECDH and private component (ECDH P-256, P-384, P-521)																																										

	16	Firmware code integrity check	HMAC ECDSA	Used to check the integrity of crypto-related code. (HMAC-SHA-256 and ECDSA P-256) *Keys used to perform power-up self-tests are not CSPs and do not need to be zeroized
	17	Firmware Content Encryption Key	AES-256	Used to encrypt/decrypt firmware, software, and sensitive content.
	18	Password	Password	Authentication string with a minimum length of 8 characters. Stored hashed with SHA-256 and nonce.
	19	DRBG Seed /State	DRBG	AES 256 CTR DRBG used in the generation of a random values.
<p>The TOE performs a key error detection check on each internal, intermediate transfer of a key. The TOE stores persistent secret and private keys in encrypted form (AES-CBC encrypted) when not in use. The KEK (256-bit AES key) is the Firmware Content Encryption Key (also known as the Master Key). The KEK is not stored encrypted but is protected by Cryptod. The KEK is destroyed by the TOE's overwriting method. The TOE also zeroizes non-persistent cryptographic keys as soon as their associated session has terminated. In addition, the TOE recognizes when a private key expires and promptly zeroizes the key on expiration. The TOE does not permit expired private signature keys to be archived.</p> <p>Private cryptographic keys, plaintext cryptographic keys, and all other critical security parameters stored in intermediate locations in volatile memory for the purposes of transferring the key/critical security parameters (CSPs) to another location are zeroized immediately following the transfer. Zeroization is done by overwriting the storage location with a random pattern, followed by a read-verify. Note that plaintext cryptographic session keys (e.g., TLS encryption keys, SSH session keys) and CSPs (e.g., TLS Pre-Master secret, ECDHE/DHE private components) are only ever stored in volatile memory.</p> <p>For non-volatile memories other than EEPROM and Flash, the zeroization is executed by overwriting three times using a different alternating data pattern of ones and zeros each time. This includes the SSD storage. This includes all CSPs that are not stored in volatile memory such as private keys, KEK, hashed passwords, and entropy seeds. Only the KEK is stored in plaintext. It is used to encrypt all the private keys and other sensitive data. When a new KEK is generated, the old KEK is destroyed via key store APIs that overwrites the old KEK. The KEK is erased when the administrator initiates the zeroization function, which overwrites the KEK three or more times using an alternating pattern of ones and zeroes. Destruction of all encrypted stored keys is accomplished indirectly through destruction of the KEK that encrypted them.</p> <p>For volatile memory and non-volatile EEPROM and Flash memories, the zeroization is executed by a single direct overwrite consisting of a pseudo random pattern, followed by</p>				

	a read-verify. Sensitive data in volatile memory includes session keys such as encryption keys, integrity keys, and the Pre-Master secret.
FCS_TLSC_EXT.1 FCS_TLSS_EXT.1 FCS_TLSS_EXT.2	<p>The TOE can be configured as a TLS server for mutual certificate-based authentication for secure connections. The key agreement parameters of the server key exchange message consist of the key establishment parameters generated by the TOE: Diffie-Hellman parameters with key size of MODP group 2048-bit, ECDHE implementing NIST curves secp256r1, secp384r1, and secp521r1. The TOE supports session resumption using tickets for a single context (no configuration needed). The TOE checks if session tickets expire which would trigger a full handshake. The session tickets are encrypted with AES encryption and 128-bits encryption key plus 256-bits HMAC-SHA-256 key; and adhered to the structural format provided in section 4 of RFC 5077. TOE does not support fallback authentication for TLS. The TOE denies connections from clients requesting connections using SSL 2.0, SSL 3.0, TLS 1.0 or TLS 1.1 and shall not establish a trusted channel if the fully qualified distinguished name (FQDN) in the subject or Subject Alternative Name (SAN) field contained in a certificate does not match the expected identifier for the peer. The TOE will match the FQDN identifier according to RFC 6125 section 6. If the client certificate is not valid, the TOE will not establish a connection.</p> <p>The TOE can be configured as a TLS client for secure communication to an external audit server. The TOE verifies that the presented identifier matches the reference identifier (identifiers in RFC 6125 section 6) and only establishes a trusted channel if the peer certificate is valid. The TOE compares the external server's presented identifier to the reference identifier by matching the certificate Common Name (Subject), FQDN (hostname), and prioritizing the SAN field (if it exists) over the CN field. The TOE supports FQDN reference identifier and wildcards for peer authentication; IP addresses are not used in the evaluated configuration for the syslog connection. The TOE presents the Supported Elliptic Curves Extension in the Client Hello with the secp256r1, secp384r1, and secp521r1 NIST curves and is enabled by default. Additionally, the TOE supports RSA key sizes of 2048/3072/4096 bits, and ECDSA curves of P-256/384/521 for the digital signature algorithms that may be present in the TLS server certificate.</p> <p>The TOE implements only TLS 1.2 (RFC 5246), and does not support cipher suite configuration.</p> <p>TOE (as TLS client) to syslog server supports the following cipher suites:</p> <ul style="list-style-type: none"> • TLS_DHE_RSA_WITH_AES_128_CBC_SHA as defined in RFC 3268 • TLS_DHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC 3268 • TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA as defined in RFC 8422 • TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC 8422 • TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA as defined in RFC 8422 • TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA as defined in RFC 8422 • TLS_DHE_RSA_WITH_AES_128_CBC_SHA256 as defined in RFC 5246 • TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 as defined in RFC 5246 • TLS_ECDHE_ECDSA_WITH_AES_128_CBC_SHA256 as defined in RFC 5289 • TLS_ECDHE_ECDSA_WITH_AES_256_CBC_SHA384 as defined in RFC 5289 • TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289 • TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289 • TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289 • TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289

	<p>TOE (as TLS server) connection to firewall (same for mutual authentication) supports TLS:</p> <ul style="list-style-type: none"> • TLS_DHE_RSA_WITH_AES_128_SHA as defined in RFC 5246 • TLS_DHE_RSA_WITH_AES_256_SHA as defined in RFC 5246 • TLS_DHE_RSA_WITH_AES_128_CBC_SHA256 as defined in RFC 5246 • TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 as defined in RFC 5246 • TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289 • TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289 • TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 as defined in RFC 5289 • TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 as defined in RFC 5289 • TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA as defined in RFC 8422 • TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA as defined in RFC 8422 <p>When FIPS-CC mode is enabled, all TLS connections will only support the following signature algorithm extensions for TLS mutual authentication (by default):</p> <ul style="list-style-type: none"> • rsa_pkcs1 with sha256(0x0401), • rsa_pkcs1with sha384(0x0501), • rsa_pkcs1 with sha512(0x0601), • ecdsa_secp256r1 with sha256(0x0403), • ecdsa_secp384r1 with sha384(0x0503) <p>For TLS client functionality in FIPS-CC mode, the TOE supports the following signature algorithm extensions (by default):</p> <ul style="list-style-type: none"> • rsa_pkcs1 with sha256(0x0401), • rsa_pkcs1with sha384(0x0501), • rsa_pkcs1 with sha512(0x0601), • ecdsa_secp256r1 with sha256(0x0403), • ecdsa_secp384r1 with sha384(0x0503), • ecdsa_secp521r1 with sha512(0x0603), • rsa_pss_rsae with sha256(0x0804), • rsa_pss_rsae with sha384(0x0805), • rsa_pss_rsae with sha512(0x0806)
<p>FCS_SSH_EXT.1 FCS_SSHS_EXT. 1</p>	<p>The TOE supports SSHv2 server (compliant to RFCs 4251, 4252, 4253, 4254, 4344, 5647, 5656, 6668, 8308, 8332) with AES encryption/decryption algorithm (in CBC, CTR, or GCM mode) with key sizes of 128 or 256 bits. The TOE does not support any other optional characteristics for encryption or public key algorithms. The TOE also supports HMAC-SHA-256, HMAC-SHA-512, implicit MAC (aes128-gcm@openssh.com and aes256-gcm@openssh.com) for integrity. Both encryption and integrity algorithms are administrator-configurable and while 3DES, HMAC-MD5, diffie-hellman-group-1 are also supported, they are all disabled when FIPS-CC mode is enabled. Only the Approved encryption and integrity algorithms along with key exchange algorithms ecdh-sha2-nistp256, ecdh-sha2-nistp384, and ecdh-sha2-nistp521 and authentication public-key algorithms ssh-rsa, rsa-sha2-256, and rsa-sha2-512 are permitted in the evaluated configuration. If the SSH client (in the operational environment) only supports non-Approved algorithms, the SSH connection will be rejected by the TOE. SSH server supports both RSA and ECDSA SSH host keys as specified in FCS_SSHS_EXT.1. The TOE implements SSH KDF as defined in RFC 5656 section 4 for use in ECC key establishment</p>

	<p>schemes. Additionally, the SSH KDF that is utilized by the TOE has been algorithm tested and received a CAVP certificate to ensure that the KDF is functioning properly.</p> <p>The TOE uses OpenSSH implementation to support the SSHv2 connections. The password authentication timeout period is 60 seconds allowing clients to retry only 4 times by default but configurable. In addition, public-key (RSA), keyboard-interactive, and password-based authentication can be configured with password-based being the default method. For password, the TOE verifies the user identity when the username is entered. For public-key, the administrator must associate the public key to the user. SSH packets are limited to 262,105 bytes and any packet over that size will be dropped (i.e., not processed farther and buffer containing the packet will be freed). The TOE manages a tracking mechanism for each SSH session so that it can initiate a new key exchange (rekey) when either a configurable amount of data (10 – 4000 MBs) or time (10 – 3600 seconds) has passed, whichever threshold occurs first. In the evaluated configuration, the administrator should not configure the SSH data rekey threshold to be more than 1024 MBs that apply to both transmitted and received data.</p>
--	---

6.3 Identification and Authentication

FIA_UIA_EXT.1	<p>The TOE is designed to require users to be identified and authenticated before they can access any of the TOE functions. The only capabilities allowed prior to users authenticating are the display of an informative (login) banner and responding to ICMP request (e.g., ping or ICMP echo reply).</p> <p>The TOE maintains user accounts which it uses to control access to the TOE. When creating a new user account, the administrator specifies a username, password, and a role. Only one role is specified in the user account per user. The administrator can also specify an SSH key to be used instead of a password.</p> <p>The TOE uses the username and password or an SSH key to identify and authenticate the user when the user logs in via the CLI. The TOE does not echo passwords as they are entered, and the private keys are never transmitted. When accessing the CLI, the default authentication method is password. The administrators must configure public-key authentication which is supported for SSH sessions. It uses the role attribute to specify user permissions and control what the user can do with the CLI.</p> <p>The administrator can logon to CLI by using a secure connection (SSHv2) from an SSH client. The TOE provides secure access using an SSHv2 client. The administrator enters the IP address/hostname of the TOE and their username and password or their corresponding SSH key.</p> <p>A logon successful note is provided when the correct credentials are used (username and password or SSH key) that matches a defined account on the TOE.</p>
FIA_PMG_EXT.1	<p>Passwords can be composed of upper and lower case letters, numbers and special characters ("!", "@", "#", "\$", "%", "^", "&", "*", "(", ")", "~", "+", "=", "-", ".", "/", ":", ";", "<", ">", "[", "\\", "]", "_", "`", "{", "}", "~", and "all Unicode characters"). The minimum password length is configurable by the administrator from 8 up to 15 characters. Note in FIPS-CC mode, the minimum password length cannot be configured below 8. The maximum password length is 63 characters. For example, if the administrator configures the minimum password length as 15, they can only create passwords from length of 15 to 63.</p>

FIA_AFL.1	<p>The TOE logs all unsuccessful authentication attempts in the system log, and tracks the number of failed attempts via internal counters. The TOE can be configured to lock a user or authorized IT entity out after a configurable number (1 – 10) of unsuccessful authentication attempts. The lock can be configured to last a specified amount of time (0 – 60 minutes) during which providing the correct credentials will still not allow access (i.e. locked out). A setting of “0” will lock out the user indefinitely. In this case, the Administrator must unlock the locked user.</p> <p>These settings can be configured for SSH administration connections but applies to password authentication only. Public-key authentication is not vulnerable to weak passwords that can be brute-forced. In the evaluated configuration, it is required that at least one administrator, preferably the Superuser role (predefined ‘admin’ account), is configured with public-key authentication for SSH to prevent a denial of service due to locked accounts.</p>
FIA_X509_EXT.1/Rev FIA_X509_EXT.2(1) FIA_X509_EXT.2(2)	<p>The TOE uses X.509v3 certificates as defined by RFC 5280 to support authentication for TLS connections (client and server authentication). Public key infrastructure (PKI) credentials, such as RSA keys and certificates are stored in the TOE’s underlying file system on the appliance. Certificates and their associated private key are stored in a single container: the Certificate File. The PKCS#12 file consists of an Encrypted Private Key and X.509 Certificate. By default, all the private keys are protected since they are always stored in encrypted format using AES-256. The physical security of the appliance (A.PHYSICAL_PROTECTION) protects the appliance and the certificates from being tampered with or deleted. In addition, the TOE identification and authentication security functions protect an unauthorized user from gaining access to the TOE.</p> <p>The TOE supports Certificate Revocation List (CRL) and Online Certificate Status Protocol (OCSP) status verification for certificate profiles. CRL supports RFC 5280 and 5759 supporting strong Suite B ECDSA algorithms and curve sizes for signing CRLs, and OCSP as specified in RFC 6960. In the evaluated configuration, the syslog connection implements OCSP for status verification for the certificate. The connection to the firewalls can use either CRLs or OCSP.</p> <p>The TOE uses the following rules for validating the extendedKeyUsage field:</p> <ul style="list-style-type: none"> • Server certificates presented for TLS shall have the Server Authentication purpose (id-kp 1 with OID 1.3.6.1.5.5.7.3.1) in the extendedKeyUsage field. • Client certificates presented for TLS shall have the Client Authentication purpose (id-kp 2 with OID 1.3.6.1.5.5.7.3.2) in the extendedKeyUsage field. <p>The TOE validates a certificate path by ensuring the presence of the basicConstraints extension is present and that the CA flag is set to TRUE for all CA certificates. The TOE forms a Certificate trust path by ensuring that the basic constraints are met, proper key usage parameters exist, the CA flag exists, performing a revocation check of each certificate in the path and performing the validity of the CA certificate. The TOE will not treat a certificate as a CA certificate if the basicConstraints extension is not present or the CA flag is not set to TRUE.</p> <p>The TOE supports certificate path validation for a minimum path length of three certificates and terminates with a trusted CA certificate (i.e., Root certificate). The Administrator must import or generate a root CA certificate and store it in the TOE</p>

	<p>trust store. To use only a specific trusted certificate, the Administrator must specify only that certificate in the Certificate Profile and tie that Profile to a TLS connection.</p> <p>A certificate is checked for revocation status the first time it is used, and once validated, the status is cached for one hour. The TOE downloads and caches the last-issued CRL for every CA listed in the trusted CA list of the TOE. Caching only applies to validated certificates; if a TOE never validated a certificate, the TOE cache does not store the CRL for the issuing CA. Also, the cache only stores a CRL until it expires (one hour period). The TOE supports CRLs only in Distinguished Encoding Rules (DER) or PEM format.</p> <p>The TLS session for Syslog is blocked when the certificate status is unknown or cannot be determined. This is the default behavior for syslog connections and cannot be changed. When configuring the TLS sessions for Firewalls, the administrator may configure the profile whether or not to block connections when certificate status is unknown or cannot be determined.</p>
FIA_X509_EXT.3	<p>The authorized administrator may generate a certificate request as specified in RFC 2986 and provide the following information in the request: Common Name, Organization, and Country. The administrator may also import a certificate and private key into the TOE from an enterprise certificate authority or obtain a certificate from an external CA. When the administrators import a certificate based on the CSR, the TOE will check to make sure the certificate chain are present in the TOE. Otherwise, the TOE will reject the certificate and will not associate it with the CSR.</p>

6.4 Security Management

FMT_MOF.1/ManualUpdate FMT_MTD.1/CoreData	<p>The TOE provides a CLI to support security management of the TOE. The CLI is accessible securely over SSHv2. The restricted role-based privileges enable only authorized administrators to configure the TOE functions such as updating the TOE, managing X.509v3 certificates in the trust store, and manipulating TSF data.</p>
FMT_SMF.1	<p>The security management functions provided by the TOE include:</p> <ul style="list-style-type: none"> • Ability to administer the TOE remotely; • Ability to configure the access banner; • Ability to configure the remote session inactivity time before session termination; • Ability to update the TOE, and to verify the updates using digital signature capability prior to installing those updates; • Ability to configure the list of TOE-provided services available before an entity is identified and authenticated, as specified in FIA_UIA_EXT.1; • Ability to configure the cryptographic functionality; • Ability to configure thresholds for SSH rekeying; • Ability to set the time which is used for time-stamps; • Ability to manage the TOE's trust store and designate X.509v3 certificates as trust anchors; • Ability to generate Certificate Signing Request (CSR) and process CA certificate response; • Ability to configure the authentication failure parameters for FIA_AFL.1; • Ability to manage the trusted public keys database

	The CLI provides the administrator the ability to administer the TOE securely with all management functions. The management functions above can be configured when the administrator successfully authenticates into the TOE via the CLI.
FMT_SMR.2	<p>The TOE controls user access to commands and resources based on user role. Users are given permission to access a set of commands and resources based on their user role. By default, the TOE has the following pre-defined administrator roles: Superuser. The administrator role (Superuser) is considered the Security Administrator as defined in the [NDcPP] for the purposes of this ST. All roles can administer the TOE securely, and a user account can only be assigned one role at a time.</p> <ul style="list-style-type: none"> • Superuser—Full read-write access to WildFire services

6.5 Protection of the TSF

FPT_SKP_EXT.1	<p>Certificates and their associated private key are stored in a single container: the Certificate File. The PKCS#12 file consists of an Encrypted Private Key and X.509 Certificate. By default, all the private keys (including SSH private keys) are protected since they are always stored in encrypted format using AES-256. The TOE prevents the reading of all keys by encrypting them with a Master Key using AES-256. The TOE does not provide an interface to read the Master Key. The TOE is designed specifically to prevent access to locally-stored cryptographically protected passwords and does not disclose any keys stored in the TOE. The TOE protects the confidentiality of user passwords by hashing the passwords using SHA-256. The TOE does not offer any functions that will disclose to any users a stored cryptographic key or password.</p>
FPT_APW_EXT.1	
FPT_TST_EXT.1	<p>The TOE runs self-tests to ensure that the cryptographic capabilities of the TOE are intact, which include the list below. These tests are performed each time the module is powered on or when the administrator initiates it via CLI.</p> <ul style="list-style-type: none"> • AES Encrypt Known Answer Test • AES Decrypt Known Answer Test • AES GCM Encrypt Known Answer Test • AES GCM Decrypt Known Answer Test • AES CCM Encrypt Known Answer Test • AES CCM Decrypt Known Answer Test • RSA Sign Known Answer Test • RSA Verify Known Answer Test • RSA Encrypt/Decrypt Known Answer Test • ECDSA Sign Known Answer Test • ECDSA Verify Known Answer Test • HMAC-SHA-1 Known Answer Test • HMAC-SHA-256 Known Answer Test

	<ul style="list-style-type: none">• HMAC-SHA-384 Known Answer Test• HMAC-SHA-512 Known Answer Test• SHA-1 Known Answer Test• SHA-256 Known Answer Test• SHA-384 Known Answer Test• SHA-512 Known Answer Test• DRBG SP800-90A Known Answer Tests• SP 800-90A Section 11.3 Health Tests• DH Known Answer Test• ECDH Known Answer Test• SP 800-135 KDF Known Answer Tests• Firmware Integrity Test• Pairwise Consistency Tests• SP 800-90B Entropy Health Tests <p>The software integrity is verified with HMAC-SHA-256 and ECDSA P-256. If the calculated result does not equal the previously generated result, the integrity test shall fail.</p> <p>A known-answer test involves operating the cryptographic algorithm on data for which the correct output is already known and comparing the calculated output with the previously generated output (the known answer). If the calculated output does not equal the known answer, the known-answer test shall fail. The TOE performs the following Conditional Self-Tests within the cryptographic module when the conditions specified for the tests occur:</p> <p>Conditional Self-Tests</p> <ul style="list-style-type: none">• SP 800-90B health tests are performed at power-up and continuously• RSA Pairwise Consistency Test• ECDSA Pairwise Consistency Test• Firmware Load Test – Verify firmware signatures using RSA 2048 with SHA-256 at time of load <p>The TOE performs the following pair-wise consistency tests for public and private keys:</p> <ol style="list-style-type: none">1. If the keys are used to perform an approved key transport method or encryption, then the public key shall encrypt a plaintext value. The resulting ciphertext value shall be compared to the original plaintext value. If the two values are equal, then the test shall fail. If the two values differ, then the private key shall be used to decrypt the ciphertext and the resulting value shall be compared to the original plaintext value. If the two values are not equal, the test shall fail.2. If the keys are used to perform the calculation and verification of digital signatures, then the consistency of the keys shall be tested by the calculation and verification of a digital signature. If the digital signature cannot be verified, the test shall fail.
--	---

	<p>If a self-test fails, the TOE enters an error state and outputs an error indicator. The TOE does not perform any cryptographic operations while in the error state. All data output from the TOE is inhibited when an error state exists. Should one or more power-up self-tests fail, the module will reboot and enter a maintenance state in which the reason for the reboot can be determined.</p> <p>The methods above are sufficient to ensure the correct functionality of the TSF as the self-tests encompass the cryptographic functionality and the integrity of the entire TOE software/firmware executable code.</p>
FPT_TUD_EXT.1	<p>Authorized administrators can query the current version of the TOE's software using the CLI with the command "show system info", and are able to receive updates from updates.paloaltonetworks.com using the command "request system software check" followed by "request system software download <version>". There is no automatic installation of new software; an administrator must manually perform this update. The Palo Alto Networks Update Server supports TLS and uses approved cipher suites to ensure that downloads from the server are protected, and are not tampered with in transit.</p> <p>As an additional precaution, Palo Alto Networks has chosen to sign (using RSA-2048) all content that is downloaded to the TOE. If the TOE is not connected to the internet, the administrators can download the updates and upload it to the TOE (manual update).</p> <p>When the TOE update package and its corresponding digital signature is downloaded or uploaded; the digital signature is checked automatically by the TOE by verifying the signature using the public key (corresponding to the RSA key used to create the signature). Palo Alto Networks manages the update server and guarantees that images are digitally signed. Public keys are stored and protected in the TOE's file system. If the signature is verified, the update is performed; otherwise the update is not performed.</p>
FPT_STM_EXT.1	<p>The TOE is a hardware appliance that includes a hardware-based real-time clock. The TOE's embedded OS manages the clock and exposes administrator clock-related functions such as set time. The clock is used for audit record time stamps, measuring session activity for termination, certificate validity checking, timing administrator lockout due to excessive failed authentication attempts, and for cryptographic operations based on time/date.</p>

6.6 TOE Access

FTA_SSL.3	<p>The TOE will enforce an administrator-defined inactivity timeout value after which the inactive, session will be terminated regardless of authentication methods (e.g. password, public-key). The TOE can be configured by an administrator to set an interactive session timeout value (any integer value from 1 to 1,440 minutes) with default set to 60 minutes. The function is disabled by default and the administrator must follow the CC AGD to configure the session idle timeout value.</p> <p>A session that is inactive (i.e. no commands issued from the remote client) for the defined timeout value will be terminated. The users will be required to re-enter their user ID and their password or perform public-key authentication (i.e. restart an SSH connection) in order to establish a new session once the session is terminated. The users can also enter the 'exit' command to terminate user sessions.</p>
FTA_SSL.4	<p>The TOE provides the function to logout (or terminate) user sessions as directed by the user.</p>
FTA_TAB.1	<p>The TOE can be configured to display an administrator-defined advisory banner prior to authentication when accessing the TOE via a secure connection to the management port in order to access the CLI (SSH).</p>

6.7 Trusted Path/Channels

FTP_ITC.1	<p>The TOE can be configured to send audit records to an external syslog server using TLS in real-time. The TOE permits the TSF to initiate communication with the syslog server using the TLS trusted channel. The TOE (TLS server) can also communicate with the Palo Alto Networks firewalls via TLS. Mutual authentication is supported but must be configured for all TLS channels.</p> <p>The TOE communicates with its authorized entities over TLS only and all communication are sent over the trusted channel, including the TOE initial communication. The underlying TLS algorithms are supported by CAVP-validated cryptographic mechanisms included in the TOE implementation.</p>
FTP_TRP.1/Admin	<p>The TOE provides SSH to provide a communication path between itself and authorized administrators. Administrators can initiate a secure session that is secure using CAVP validated cryptographic operations, and all security management functions require the use of this security channel. In FIPS-CC mode, Telnet and HTTP are disabled permanently.</p>

7. Protection Profile Claims

This ST is exact conformant to the [NDcPP] and [SSHPKG].

8. Rationale

This Security Target includes by reference the [NDcPP] applicable Security Problem Definition, Security Objectives, and Security Assurance Requirements. The Security Target makes no additions to the [NDcPP] assumptions. Security Functional Requirements have been reproduced verbatim with the Protection Profile and functional package operations completed except where refinements were made by the ST author and formatted per the defined convention. Operations on the security requirements follow [NDcPP] and [SSHPKG] application notes and evaluation activities. The Security Target did not add or remove any security requirements but added ALC_FLR.3. Consequently, [NDcPP] and [SSHPKG] rationale applies and is complete.