



FIPS 140-2 Non-Proprietary Security Policy

Apricorn FIPS 140-2 Encryption System Gen 2

Author: Victor Nguyen

Date: 10/22/2020

Document Issue: 2.1

This document may be copied without the author's permission, provided that it is copied in its entirety without any modification.

Apricorn is a trademark or a registered trademark of Apricorn in certain countries. All Apricorn product names and logos are trademarks or registered trademarks of Apricorn in certain countries. All other company and product names and logos are trademarks or registered trademarks of their respective owners in certain countries.

Table of Contents

1. References	3
2. Target Audience	3
3. Introduction	4
3.1 Purpose of the Security Policy	4
3.2 Cryptographic Module Description	4
4. Security Levels	7
5. Interfaces and Ports	7
6. Cryptographic Key and CSP Management	8
6.1 AES Master Key	8
6.2 PIN Access Codes.....	8
6.3 Random Number Generation	8
6.4 EC DH Key Establishment	8
7. Identification and Authentication Policy	9
7.1 Roles	9
7.2 Authentication.....	10
8. Access Control Policy	11
9. Physical Security Policy	13
10. Regulatory Compliance	13
11. Security Rules	14
11.1 Initialization Period of the Cryptographic Module.....	14
11.2 FIPS Approved Mode	15
12. Mitigation of Other Attacks Policy	17
13. Acronyms	17

Revision History	
2.0	Original Release
2.1	Revalidation Submission

Table 1 – Revision History

1. References

Author	Title
NIST	FIPS PUB 140-2: Security Requirements For Cryptographic Modules, December, 2002
NIST	Derived Test Requirements for FIPS PUB 140-2, January, 2011
NIST	Implementation Guidance for FIPS PUB 140-2 and the Cryptographic Module Validation Program, August, 2020
NIST	FIPS 197
NIST	FIPS 180-4
NIST	SP800-90A Revision 1
NIST	SP800-38E
NIST	SP800-56A
NIST	SP800-133 Revision 2

Table 2 - References

2. Target Audience

- NIST, CCCS, Accredited Laboratory and the FIPS 140-2 Validation Group
- Developers Working on the Release
- Product Verification
- Documentation
- Product and Development Managers
- Security Assurance
- Administrator and General User

3. Introduction

This security policy document contains a description of the Apricorn FIPS 140-2 Encryption System Gen 2 (also referred to herein as the cryptographic module, or simply the module). This document contains a specification of the security rules under which the module must operate as derived from the requirements of FIPS 140-2.

3.1 Purpose of the Security Policy

There are three major reasons that this security policy is defined for, and must be followed by, the cryptographic module:

- This document is required for FIPS 140-2 validation.
- This document allows individuals and organizations to determine whether the cryptographic module, as implemented, satisfies the stated security policy.
- This document describes the capabilities, protection, and access rights provided by the cryptographic module, allowing individuals and organizations to determine whether it will meet their security requirements.

3.2 Cryptographic Module Description

The Apricorn FIPS 140-2 Encryption System Gen 2 is a multi-chip embedded cryptographic module. Specifically, the module is a USB 3.1 to Data Storage Memory Module which implements hardware encryption dependent on operator authentication.

The module provides secure encrypted (AES-XTS 256) storage, ensuring that only authorized operators have access to the protected data.

Access is granted by use of an alpha-numeric keypad whereby the authorized operator inputs a personal identification number (PIN) to access and unlock the secured data.


Electronic components containing all critical security parameters (CSPs) are encapsulated within a hard, opaque, tamper-evident, production-grade epoxy.

This software-free, embedded authentication approach allows the module to work with any mass storage compliant operating system whether it has a keyboard or not, and never shares any CSPs with the host.

The cryptographic module is designed to meet FIPS 140-2 Level 2 cryptographic module requirements for the storage of user credentials and file systems. The module will only operate in the “FIPS Approved” mode of operation. It must be configured according to the initial setup instructions in Section 11.1 before being operational. A non-Approved FIPS mode is not supported.

The Apricorn FIPS 140-2 Encryption System Gen 2 (Figure 1 below), represents the physical boundary of the device and the cryptographic boundary as outlined by the red marking. The module’s cryptographic boundary is defined by the area enclosed by the epoxy fence placed onto the PCB, extending downward through and inclusive of the PCB and all traces within the silhouette of the epoxy fence. All security relevant components are contained within this boundary.

Figure 1 - Apricorn FIPS 140-2 Encryption System Gen 2

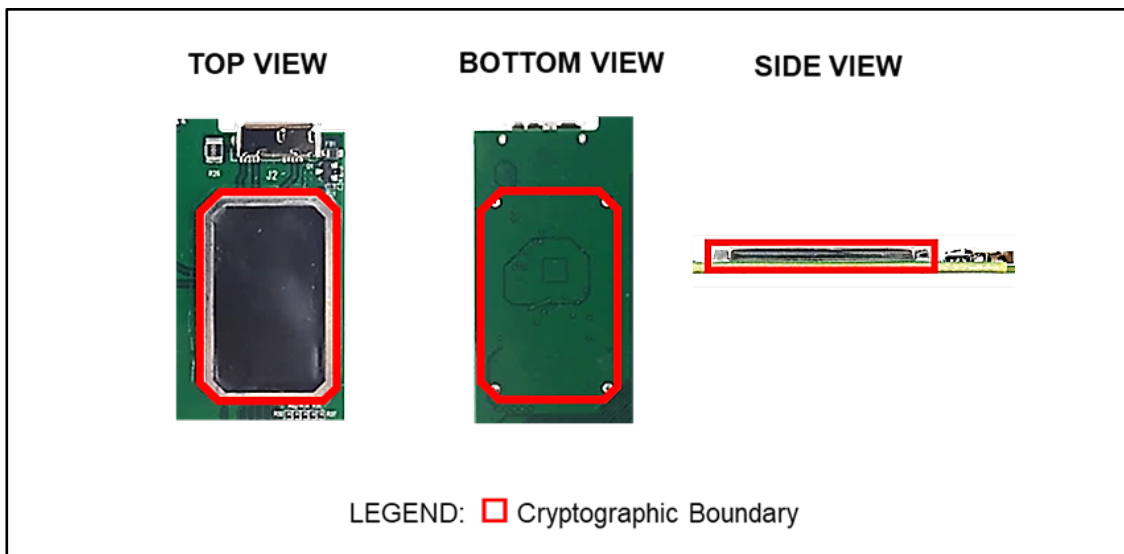

Apricorn FIPS 140-2 Encryption System Gen 2	
Firmware Version	2.1
Part Numbers / Hardware Versions	AFESG2-1 Rev A2 AFESG2-2 Rev A2 AFESG2-3 Rev A2

Table 3 – Cryptographic Module Versions

List of All Approved Security Functions:

The cryptographic module offers FIPS Approved cryptographic security functions including the following:

CAVP Cert.	Algorithm	Standard	Mode / Method	Key Lengths, Curves or Moduli	Use
C1597	AES	SP 800-38A SP 800-38E	ECB XTS	256-bits	Data Encryption / Decryption Note: This mode is only approved for storage applications, and AES-XTS-128 is NOT supported by the cryptographic module.
C877	AES	SP 800-38A	CBC	256-bits	Data Decryption
Vendor Affirmed	CKG	SP 800-133 Rev 2	Non-modified output		Key Generation Sections 5.2 Key Pairs for Key Establishment, 6.1 “Direct Generation” of Symmetric Keys, 6.2.1 Symmetric Keys Generated Using Key-Agreement Schemes
C884	DRBG	SP 800-90A Revision 1	HASH_Based DRBG (SHA-256)	Security strength is 256 bits	Deterministic Random Bit Generation
C885	ECDSA	FIPS 186-4	KeyGen, PKV	P-256	Prerequisite to KAS
C885	KAS EC-DH	SP 800-56A	ECC	P-256	Key Agreement
C883	SHS	FIPS 180-4	SHA-256		Message Digest

Table 4 – List of All Approved Security Functions

List of All non-Approved but Allowed Security Functions:

Algorithm	Use
Hardware NDRNG	Seeding for the HASH DRBG with 256 bits of security. A 1024-bit seed is used.

Table 5 – List of All non-Approved but Allowed Security Functions

4. Security Levels

The cryptographic module meets an overall security of FIPS 140-2 Level 2. The FIPS 140-2 specification defines security requirements that are grouped into Security Requirement Areas. These areas are tested individually for a specific level of achievement. The table below defines the targeted level in each section for the module.

FIPS 140-2 Security Requirement	Target Level
Cryptographic Module Specification	Level 2
Cryptographic Module Ports and Interfaces	Level 2
Roles, Services and Authentication	Level 2
Finite State Model	Level 2
Physical Security	Level 2
Operational Environment	N/A
Cryptographic Key Management	Level 2
EMI/EMC	Level 3
Self-Tests	Level 2
Design Assurance	Level 3
Mitigation of Other Attacks	N/A

Table 6 – FIPS Security Levels

5. Interfaces and Ports

There are four physical ports on the cryptographic module: a SuperSpeed Universal Serial Bus (USB 3.1), a Keypad Input, a SATA connector and signals to drive three external status LEDs.

Physical Port	Description	Logical Interface
SuperSpeed Universal Serial Bus (USB 3.1)	SuperSpeed Universal Serial Bus Signals (USB 3.1)	Data Input/ Data Output/ Power/ Control Input/ Status Output
Keypad Input	Keypad Input Signals	Control Input / Data Input
SATA	SATA Signals	Data Input/ Data Output/ Power/ Control Input/ Status Output
LEDs output	Output LED Signals	Status Output

Table 7 – Interfaces and Ports

6. Cryptographic Key and CSP Management

6.1 AES Master Key

The cryptographic module uses an AES Master Key (an AES-XTS 256-bit key) to encrypt/decrypt protected data. The AES-XTS 256-bit key is generated using the FIPS Approved deterministic random bit generator.

6.2 PIN Access Codes

On the cryptographic module, each personal identification number (PIN) has a minimum of seven (7) digits and maximum of sixteen digits. The module supports one Admin PIN, four User PINs, one Self-Destruct PIN, and four Recovery PINs.

The Admin PIN is used by the cryptographic officer to administer the device or access the storage area.

The User PIN is used to access the storage area.

The Recovery PIN is used to create a new User PIN.

The Self-Destruct PIN zeroizes all PINs and the AES Master Key, then resets to a new AES Master Key and new Admin PIN.

6.3 Random Number Generation

The cryptographic module contains a non-deterministic hardware random number generator (NDRNG) that uses an internal, unpredictable physical source of entropy that is outside of human control. Random numbers generated by the NDRNG are used as seeding values for the FIPS Approved Deterministic Random Bit Generator. Continuous RNG tests are performed on the outputs of the NDRNG.

The HASH DRBG Internal State (V and C) is the DRBG's working state.

The HASH DRBG Seed is used to seed the DRBG. The seed is 1024 bits and includes the Entropy Input and Nonce.

6.4 EC DH Key Establishment

AES-CBC Decryption Key (AES-256) is used to decrypt the data sent from the host.

ECDH Public Key (P-256) is the module's SP 800-56A public key component and is used to create secure communication with the host.

ECDH Private Key (P-256) is the module's SP 800-56A private key component and is used to create secure communication with the host.

ECDH Shared Secret "Z" is generated using SP 800-56A and is fed into the SP 800-56A key derivation function to create the AES-CBC Decryption Key.

Host ECDH Public Key (P-256) is the host PC's SP 800-56A public key component and is used to create secure communication with the module.

7. Identification and Authentication Policy

7.1 Roles

The cryptographic module performs role-based authentication via verification of the PIN code for the Administrator role and General User role. Alternatively, the Administrator role may authenticate using the Configurator service, which utilizes EC Diffie-Hellman.

The individual that takes physical possession of the module and initializes the PIN for the first time is the Administrator. The first-time user of the Configurator tool is also considered the Administrator. The Administrator role is the Cryptographic Officer role as defined in the FIPS 140-2 standard. The Administrator role is responsible for the overall security of the module.

The Administrator can change his/her own personal identification number (PIN) and can access all the data stored within the device, set or modify all device settings, as well as add and erase a General User.

The General User role is the User role as defined in the FIPS 140-2 standard. The General User role has limited privileges and access to limited services of the module. The General User can change his/her own personal identification number (PIN) and access all the data stored within the storage device.

The cryptographic module supports up to five (5) authenticated operators; that is one Administrator and up to four (4) Users.

7.2 Authentication

The cryptographic module requires a minimum of seven (7) digits and maximum of sixteen (16) digits for a personal identification number (PIN). When the module is powered on, it will allow a maximum of ten (10) attempts to correctly enter the PIN code. The individual that takes physical possession of the module, or uses the Configurator service, and initializes the PIN for the first time is the Administrator.

Upon a total of ten (10) consecutive failed authentication attempts (as described above), the module will lock the keypad and require a pre-defined command sequence to be entered to allow the Administrator or General User another ten (10) attempts at entering the correct PIN code depending on the settings controlled by the Administrator when the device is set up. Brute Force setting is programmable between 4 - 20 consecutive failed attempts.

If the module does not receive the correct PIN code within the maximum of twenty (20) attempts (described above), all critical security parameters will be actively zeroized. In such a case, any encrypted data remaining on the external storage device(s) will be useless (unrecoverable).

Role	Type of Authentication	Authentication Data
Administrator (Cryptographic Officer)	Role-based	Personal Identification Number (PIN)
	Role-based	EC Diffie-Hellman (Configurator Service)
General User (User)	Role-based	Personal Identification Number (PIN)

Table 8 - Roles and Required Authentication

Authentication Mechanism	Strength of Mechanism
PIN code verification	<p>A minimum seven-digit PIN is used, with each digit selected from ten (10) possible characters. There are 10^7 (ten million) possible PIN combinations.</p> <p>Therefore, the probability of a random attempt to authenticate to the module is 1/10,000,000 which is much less than 1/1,000,000.</p> <p>The probability of multiple consecutive attempts to authenticate to the module during a one-minute period is 20/10,000,000 which is much less than 1/100,000.</p>
EC Diffie-Hellman	<p>Since EC Diffie-Hellman with P-256 is used, the probability that a random attempt to authenticate to the module is $1/(2^{128})$ which is much less than 1/1,000,000.</p> <p>Five (5) authentication attempts are allowed before a reboot must occur and a reboot takes approximately ten (10) seconds, therefore there could be ~30 attempts per minute. Given this, the probability of multiple consecutive attempts to authenticate to the module during a one-minute period is $30/(2^{128})$ which is much less than 1/100,000.</p>

Table 9 – Strengths of Authentication Mechanisms

8. Access Control Policy

The cryptographic module supports two roles: Administrator and General User. The types of services corresponding to each of the supported roles are described below.

Administrator	General User	Unauthenticated	Service	Description
X	X		Login/Unlock	Authenticates the operator to the module.
X	X		Logout/Lock	De-authenticates the operator and locks the module.
X	X		Write Data	Receives plaintext data from the host and AES XTS encrypts the data to internal storage.
X	X		Read Data	AES XTS decrypts data from internal storage and outputs plaintext data to the host.
X	X		Establish User PIN	Establishes a User PIN if to create a general user role
X	X		Change PIN	Updates the PIN.
X			Set Self-Destruct	Enables the self-destruct feature
X	X		Set Self-Destruct PIN	Prepares the module for duress event.
X	X		Self-Destruct	Reinitializes the module.
X			Delete All User PINs	Overwrites and supersedes all PINs.
X			Set Unattended Auto Lock	Sets idle timeout value in minutes.
X	X		Set Read Only	When set, does not allow writing of data to the storage. If the Admin sets the device to read only, the user is prevented from overriding this setting.
X			Set Lock Override	Sets the device to ignore re-enumeration over the USB bus.
X			Create Recovery PINs	Admin sets a PIN used to create a recovery PIN.
X	X		Use Recovery PIN	Creates a new User PIN after using the recovery PIN.
X			Setup Forced Enrollment	Admin sets the drive to require a PIN setup on the next use.
X			Set Minimum PIN length	Admin setting for minimum digit length of PINs.
X			Set LED Flicker	LED to flash when buttons are pressed.
X*			Configurator	Send configuration data to device.
X	X	X	Run Diagnostic Mode	Verifies proper keypad function and checks firmware version.
X			Set Brute Force Attempts	Sets the number of tries before the drive will lock.
X	X	X	Self-Test	Performs required power-up self-tests.
X	X	X	Get Status	Status outputs.
X*			Zeroize	Destroys all CSPs except the ECDH Private Key.
X	X	X	User Reset (FIPS Zeroize)	Resets the module and zeroize all CSPs.
X			Provision Lock	Allows a User Reset (FIPS Zeroize) to be performed by the Administrator only.

*Note: This Admin service uses the EC Diffie-Hellman authentication scheme. All others use the PIN.

Table 10 – Roles and Services

The table below shows the how CSPs and Public Keys are accessed by the module's services. The modes of access shown in the table are defined as:

- G = Generate: The service generates or derives the CSP.
- I = Input: The service inputs the CSP from outside of the module.
- O = Output: The service outputs the CSP to outside of the module.
- E = Execute: The service uses the CSP.
- S = Store: The service stores the CSP persistently.
- Z = Zeroize: The service zeroizes the CSP.

Service	CSPs and Public Keys											
	AES Master Key	User PIN	Admin PIN	Recovery PIN	Self-Destruct PIN	HASH DRBG Internal State	HASH DRBG Seed	AES-CBC Decryption Key	ECDH Public Key	ECDH Private Key	ECDH Shared Secret "Z"	Host ECDH Public Key
Login/Unlock	E	IE	IE	-	-	-	-	-	-	-	-	-
Logout/Lock	-	-	-	-	-	-	-	-	-	-	-	-
Write Data	E	-	-	-	-	-	-	-	-	-	-	-
Read Data	E	-	-	-	-	-	-	-	-	-	-	-
Establish User PIN	-	IGES	IGES	-	-	-	-	-	-	-	-	-
Change PIN	-	ZIGES	ZIGES	-	-	-	-	-	-	-	-	-
Set Self-Destruct	-	-	-	-	Z	-	-	-	-	-	-	-
Set Self-Destruct PIN	-	-	-	-	IGES	-	-	-	-	-	-	-
Self-Destruct	ZGES	Z	ZGS	Z	ZIE	Z	-	-	-	-	-	-
Delete All User PINs	-	Z	-	Z	Z	-	-	-	-	-	-	-
Set Unattended Auto Lock	-	-	-	-	-	-	-	-	-	-	-	-
Set Read Only	-	-	-	-	-	-	-	-	-	-	-	-
Set Lock Override	-	-	-	-	-	-	-	-	-	-	-	-
Create Recovery PINs	-	-	-	IS	-	-	-	-	-	-	-	-
Use Recovery PIN	-	ZIGS	-	IEZ	-	-	-	-	-	-	-	-
Setup Forced Enrollment	-	-	-	-	-	-	-	-	-	-	-	-
Set Minimum PIN Length	-	-	-	-	-	-	-	-	-	-	-	-
Set LED Flicker	-	-	-	-	-	-	-	-	-	-	-	-
Configurator	-	IS	IS	IS	IS	GE	G	GE	GEO	E	GE	EI
Run Diagnostic Mode	-	-	-	-	-	-	-	-	-	-	-	-
Set Brute Force Attempts	-	-	-	-	-	-	-	-	-	-	-	-
Self-Test	-	-	-	-	-	-	-	-	-	-	-	-
Get Status	-	-	-	-	-	-	-	-	-	-	-	-
Zeroize	Z	Z	Z	Z	Z	Z	Z	Z	Z	-	Z	-
User Reset (FIPS Zeroize)	ZGS	Z	Z	Z	Z	ZGE	ZG	Z	Z	ZG	Z	-
Provision Lock	-	-	-	-	-	-	-	-	-	-	-	-

Table 11 – CSP and Public Key Access by Service

9. Physical Security Policy

Epoxy coating

The module incorporates a hard, opaque, tamper-evident, production-grade epoxy coating encapsulating all electrical components containing critical security parameters. Attempts to remove the epoxy will cause damage to these components.

Note: The module hardness testing was only performed at an ambient, single temperature (i.e. 73.4° F) and no assurance is provided for Level 2 hardness conformance at any other temperature.

Physical Security Mechanisms	Recommended Frequency of Inspection/Test	Inspection/Test Guidance Details
Hard, opaque, tamper-evident, production-grade epoxy coating.	In accordance with the Administrator’s organizational policy or every 3 months.	Inspect the cryptographic boundary for scratches, gouges, scrapes, deformations, and any other suspicious signs of malice and tampering. If any evidence of tampering exists, the Administrator role is required to cease use of the cryptographic module immediately.

Table 12 – Physical Security

10. Regulatory Compliance

The cryptographic module has been tested for and passes the following: EMI/EMC requirements specified by 47 Code of Federal Regulations, Part 15, Subpart B, Unintentional Radiators, Digital Devices, Class B.

11. Security Rules

11.1 Initialization Period of the Cryptographic Module

The Administrator role is responsible for the overall security of the module and initializing the cryptographic module into the FIPS Approved mode of operation.

The Administrator shall perform one (1) of the following two (2) procedures to set the initial Admin PIN and initialize the module into FIPS mode:

1. Wake up the module by plugging the device into a USB port to power up. The BLUE and GREEN LEDs will glow solidly.
 - a. Press UNLOCK + 9 at the same time. The BLUE LED will glow solidly and the GREEN LED will be blinking.
 - b. Enter the series of numbers used for the Admin PIN and press the UNLOCK button.
 - c. Re-enter that same PIN and press the UNLOCK button again. The GREEN LED will illuminate for one second followed by the BLUE LED glowing solidly by itself.
 - d. Push the Lock button.

2. Execute the “Configurator” service to perform the initialization of the module with the following settings:
 - a. Amount of brute-force attempts of incorrect authentication data before the module locks: maximum of ten (10) attempts
 - b. Minimum PIN length: seven (7) digits

The Configurator GUI application is outside of the module's FIPS 140-2 validation scope. It resides on the host PC used by the Cryptographic Officer during module initialization.

Upon completion of the initialization period, the module's LED status will indicate a solid RED LED.

The cryptographic module only supports a FIPS Approved mode of operation, therefore a non-compliant configuration is out of scope for this validation.

11.2 FIPS Approved Mode

- The cryptographic module always runs in a FIPS Approved mode of operation (i.e., non-FIPS mode is not supported). It is possible to determine that the module is in FIPS mode by powering up the module (automatically invoking the self-tests) and observing LED status as follows: RED LED is solid on to indicate self-tests completed successfully; RED LED is flashing to indicate an error state, including failure of a power-up self-test as well as failure of a conditional self-test.
- The firmware revision can be determined by the following procedure:
 1. Push the Unlock button to bring the module out of a sleep state or plug into a powered USB port.
 2. Push the Lock + 1 keys at the same time and release.
 3. Push and hold the 0 key, the LEDs will flash Red and Blue for 5 seconds then all the LEDs will come on for 1 second. Release the 0 key.
 4. The LEDs will flash the firmware revision:
 - Example:
 - a. 2 Blue LED blinks = 2
 - b. Then 1 Red blink = . (period)
 - c. Then 1 Blue blinks = 1
 - d. Then Red LED on solid = end of sequenceThis firmware revision shows **2.1**
- The hardware P/N and version can be determined by checking whether one of the below containing products are in use:
 - Aegis Fortress - 4TRES37 REV B (contains AFESG2-1 Rev A2)
 - Aegis Padlock SSD - PLSSD37 REV C (contains AFESG2-2 Rev A2)
 - Aegis Padlock DT FIPS - APLDT37 REV B (contains AFESG2-3 Rev A2)
- The cryptographic module enforces separation of all data inputs, data outputs, control inputs, status outputs via defined ports and interfaces.
- The cryptographic module receives power via its defined power interface.
- The cryptographic module does not support a maintenance interface or bypass capability.
- The cryptographic module does not support the output of any secret keys, private keys, or CSPs in any form.
- During error states, the cryptographic module enforces the inhibition of all data outputs, ceases to provide any cryptographic or otherwise security relevant services, and provides non-security relevant error status.
- The cryptographic module supports role-based authentication.

- The Administrator and General User roles are explicitly prohibited from sharing PINs with any other operator. In the event that the Administrator role shares his or her PIN, the cryptographic module is deemed non-compliant and unfit for service to protect sensitive but unclassified data.
- The cryptographic module provides a hard, opaque, tamper-evident, production-grade epoxy encapsulating all electrical components containing CSPs.
- The cryptographic module enforces a non-modifiable operational environment.
- The cryptographic module protects all critical security parameters from unauthorized disclosure, modification, and substitution.
- The cryptographic module provides a non-Approved non-deterministic hardware random number generator strictly for the purpose of seeding the Approved deterministic random bit generator.
- The cryptographic module does not support manual key entry.
- The cryptographic module supports zeroization to destroy all critical security parameters. All CSPs are destroyed with the User Reset (FIPS Zeroize) service.
- The cryptographic module conforms to applicable EMI/EMC requirements.
- The cryptographic module generates cryptographic keys whose strengths are up to 256 bits of security.
- As per IG A.9, the AES-XTS implementation verifies that Key_1 \neq Key_2, before the keys are to be used.
- The cryptographic module performs all required self-tests:
 - Power-up Self-tests
 1. SHA-256 KAT
 2. SP800-90A HASH DRBG KAT and Health Check
 3. AES-XTS Encrypt KAT (AES Cert. #C1597)
 4. AES-XTS Decrypt KAT (AES Cert. #C1597)
 5. AES-CBC Decrypt KAT (AES Cert. #C877)
 6. SP 800-56A Self-tests per IG 9.6 (includes Primitive Z test and KDF KAT; prerequisites are tested separately with SHA and DRBG KATs)
 7. Firmware integrity test (16-bit EDC)
 - Conditional Self-tests
 1. NDRNG Continuous Test
 2. ECDH Pairwise Consistency Test
 3. SP 800-56A conditional tests per IG 9.6 (includes assurances per SP 800-56A sections 5.5.2 & 5.6.2.3 and ECDH pairwise consistency test)
 4. DRBG Continuous Test: N/A as allowed by IG 9.8
 5. Firmware load test: N/A
 6. Manual key entry test: N/A
 7. Bypass test: N/A
- The operator may invoke self-tests on demand by power cycling the cryptographic module.

12. Mitigation of Other Attacks Policy

The module is not designed to mitigate any specific attacks outside the scope of FIPS 140-2.

Other Attacks	Mitigation Mechanism	Specific Limitations
Not applicable	Not applicable	Not applicable

Table 13 – Mitigation of Other Attacks

13. Acronyms

- AES: Advanced Encryption Standard
- CBC: Cipher Block Chaining
- CCCS: Canadian Centre for Cyber Security
- CMVP: Cryptographic Module Validation Program
- CSP: Critical Security Parameters
- DRBG: Deterministic Random Bit Generator
- EC DH: Elliptic Curve Diffie-Hellman
- EDC: Error Detection Code
- EMI/EMC: Electromagnetic Interference/Electromagnetic Compatibility
- FIPS: Federal Information Processing Standards
- KAT: Known Answer Test
- LED: Light Emitting Diode
- NIST: National Institute of Standards and Technology
- NDRNG: Non-Deterministic Random Number Generator
- N/A: Not Applicable
- PCB: Printed Circuit Board
- PIN: Personal Identification Numbers
- RNG: Random Number Generator
- SHA: Secure Hashing Algorithm
- USB: Universal Serial Bus
- XTS: XEX Tweakable Block Cipher with Ciphertext Stealing