



Red Hat

Red Hat, LLC

Red Hat Enterprise Linux 8 Kernel Cryptographic API

FIPS 140-3 Non-Proprietary Security Policy

Document Version: 1.1

Last Modified: 2026/07/27

Prepared by:

atsec information security corporation

4516 Seton Center Parkway, Suite 250

Austin, TX 78759

© 2026 Red Hat, LLC/ atsec information security corporation.

This document can be reproduced and distributed only whole and intact, including this copyright notice.

www.atsec.com

Table of Contents

1 General.....	6
1.1 Overview	6
1.1.1 How this Security Policy was prepared	6
1.2 Security Levels.....	6
2 Cryptographic Module Specification	7
2.1 Description	7
2.2 Tested and Vendor Affirmed Module Version and Identification	8
2.3 Excluded Components	10
2.4 Modes of Operation.....	10
2.5 Algorithms.....	10
2.6 Security Function Implementations.....	14
2.7 Algorithm Specific Information	18
2.7.1 AES GCM IV	18
2.7.2 AES XTS	18
2.7.3 RSA	19
2.7.4 SHA-3	19
2.7.5 SHA-1	19
2.8 RBG and Entropy	19
2.9 Key Generation	20
2.10 Key Establishment.....	20
2.11 Industry Protocols.....	20
3 Cryptographic Module Interfaces.....	21
3.1 Ports and Interfaces.....	21
4 Roles, Services, and Authentication	22
4.1 Authentication Methods.....	22
4.2 Roles.....	22
4.3 Approved Services.....	22
4.4 Non-Approved Services	27
4.5 External Software/Firmware Loaded.....	27
5 Software/Firmware Security	28
5.1 Integrity Techniques.....	28
5.2 Initiate on Demand	28

6 Operational Environment	29
6.1 Operational Environment Type and Requirements	29
6.2 Configuration Settings and Restrictions.....	29
6.3 Additional Information.....	29
7 Physical Security	30
8 Non-Invasive Security	31
9 Sensitive Security Parameters Management	32
9.1 Storage Areas	32
9.2 SSP Input-Output Methods	32
9.3 SSP Zeroization Methods.....	32
9.4 SSPs.....	33
9.5 Transitions	38
10 Self-Tests	39
10.1 Pre-Operational Self-Tests.....	39
10.2 Conditional Self-Tests.....	39
10.3 Periodic Self-Test Information	72
10.4 Error States	82
10.5 Operator Initiation of Self-Tests.....	82
11 Life-Cycle Assurance	83
11.1 Installation, Initialization, and Startup Procedures.....	83
11.2 Administrator Guidance	83
11.3 Non-Administrator Guidance.....	83
11.6 End of Life	83
12 Mitigation of Other Attacks.....	84
Appendix A. Glossary and Abbreviations	85
Appendix B. References	86

List of Tables

Table 1: Security Levels.....	6
Table 2: Tested Module Identification – Software, Firmware, Hybrid (Executable Code Sets)	8
Table 3: Tested Operational Environments - Software, Firmware, Hybrid	9
Table 4: Vendor-Affirmed Operational Environments - Software, Firmware, Hybrid	9
Table 5: Modes List and Description	10
Table 6: Approved Algorithms.....	13
Table 7: Non-Approved, Not Allowed Algorithms.....	14
Table 8: Security Function Implementations	18
Table 9: Entropy Certificates	19
Table 10: Entropy Sources.....	19
Table 11: Ports and Interfaces.....	21
Table 12: Roles.....	22
Table 13: Approved Services	27
Table 14: Non-Approved Services	27
Table 15: Storage Areas	32
Table 16: SSP Input-Output Methods	32
Table 17: SSP Zeroization Methods	33
Table 18: SSP Table 1	36
Table 19: SSP Table 2	38
Table 20: Pre-Operational Self-Tests.....	39
Table 21: Conditional Self-Tests	72
Table 22: Pre-Operational Periodic Information	72
Table 23: Conditional Periodic Information	82
Table 24: Error States	82

List of Figures

Figure 1: Block Diagram.....	7
------------------------------	---

1 General

1.1 Overview

This document is the non-proprietary FIPS 140-3 Security Policy for version kernel 4.18.0-553.123.1.el8_10; libkcapi 1.4.0-2.el8 of the Red Hat Enterprise Linux 8 Kernel Cryptographic API module. It contains the security rules under which the module must operate and describes how this module meets the requirements as specified in FIPS PUB 140-3 (Federal Information Processing Standards Publication 140-3) for an overall Security Level 1 module.

This Non-Proprietary Security Policy may be reproduced and distributed, but only whole and intact and including this notice. Other documentation is proprietary to their authors.

1.1.1 How this Security Policy was prepared

In preparing the Security Policy document, the laboratory formatted the vendor-supplied documentation for consolidation without altering the technical statements therein contained. The further refining of the Security Policy document was conducted iteratively throughout the conformance testing, wherein the Security Policy was submitted to the vendor, who would then edit, modify, and add technical contents. The vendor would also supply additional documentation, which the laboratory formatted into the existing Security Policy, and resubmitted to the vendor for their final editing.

1.2 Security Levels

Section	Title	Security Level
1	General	1
2	Cryptographic module specification	1
3	Cryptographic module interfaces	1
4	Roles, services, and authentication	1
5	Software/Firmware security	1
6	Operational environment	1
7	Physical security	N/A
8	Non-invasive security	N/A
9	Sensitive security parameter management	1
10	Self-tests	1
11	Life-cycle assurance	1
12	Mitigation of other attacks	N/A
	Overall Level	1

Table 1: Security Levels

2 Cryptographic Module Specification

2.1 Description

Purpose and Use:

The Red Hat Enterprise Linux 8 Kernel Cryptographic API (hereafter referred to as “the module”) provides a C language application program interface (API) for use by other (kernel space and user space) processes that require cryptographic functionality. The module operates on a general-purpose computer as part of the Linux kernel. Its cryptographic functionality can be accessed using the Linux Kernel Crypto API.

Module Type: Software

Module Embodiment: Multi-Chip Standalone

Cryptographic Boundary:

The cryptographic boundary of the module is defined as the kernel binary and the kernel crypto object files, the libkcapi library, and the sha512hmac binary, which is used to verify the integrity of the software components. In addition, the cryptographic boundary contains the .hmac files which store the expected integrity values for each of the software components.

Tested Operational Environment’s Physical Perimeter (TOEPP):

The TOEPP of the module is defined as the general-purpose computer on which the module is installed.

The PAA/PAI provided by the processor are located within the module’s physical perimeter and outside of the module’s cryptographic boundary.

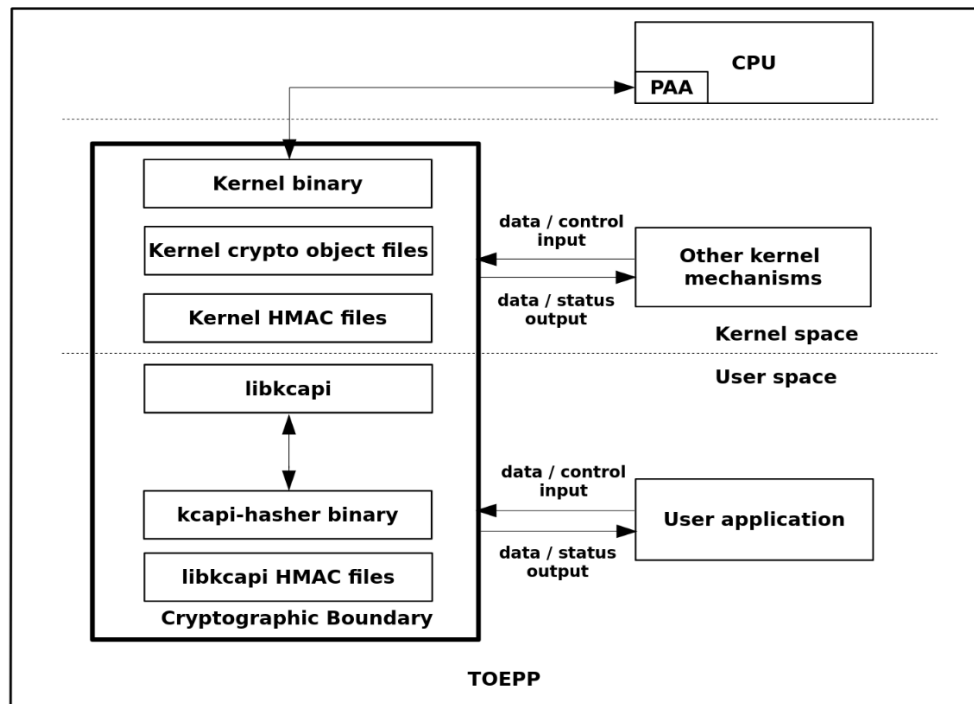


Figure 1: Block Diagram

2.2 Tested and Vendor Affirmed Module Version and Identification

Tested Module Identification – Software, Firmware, Hybrid (Executable Code Sets):

Package or File Name	Software/ Firmware Version	Features	Integrity Test
/boot/vmlinuz-4.18.0-553.123.1.el8_10.x86_64; *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.x86_64/kernel/crypto *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.x86_64/kernel/arch/x86/crypto; /usr/lib64/libkcapi.so.1.4.0, /usr/bin/sha512hmac on Dell PowerEdge R440	4.18.0-553.123.1.el8_10; 1.4.0-2.el8	N/A	HMAC-SHA2-512; Signature Verification with RSA
/boot/vmlinuz-4.18.0-553.123.1.el8_10.s390x; *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.s390x/kernel/crypto *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.s390x/kernel/arch/s390x/crypto; /usr/lib64/libkcapi.so.1.4.0, /usr/bin/sha512hmac on IBM z15 8561-T01	4.18.0-553.123.1.el8_10; 1.4.0-2.el8	N/A	HMAC-SHA2-512; Signature Verification with RSA
/boot/vmlinuz-4.18.0-553.123.1.el8_10.ppc64le; *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.ppc64le/kernel/crypto *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.ppc64le/kernel/arch/ppc64le/crypto; /usr/lib64/libkcapi.so.1.4.0, /usr/bin/sha512hmac on IBM 9009-42A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8	N/A	HMAC-SHA2-512; Signature Verification with RSA
/boot/vmlinuz-4.18.0-553.123.1.el8_10.ppc64le; *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.ppc64le/kernel/crypto *.ko and *.ko.xz files in /usr/lib/modules/4.18.0-553.123.1.el8_10.ppc64le/kernel/arch/ppc64le/crypto; /usr/lib64/libkcapi.so.1.4.0, /usr/bin/sha512hmac on IBM 9080-HEX	4.18.0-553.123.1.el8_10; 1.4.0-2.el8	N/A	HMAC-SHA2-512; Signature Verification with RSA

Table 2: Tested Module Identification – Software, Firmware, Hybrid (Executable Code Sets)

Tested Operational Environments - Software, Firmware, Hybrid:

Operating System	Hardware Platform	Processors	PAA/PAI	Hypervisor or Host OS	Version(s)
Red Hat Enterprise Linux 8	Dell PowerEdge R440	Intel Xeon Silver 4216	Yes	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8
Red Hat Enterprise Linux 8	Dell PowerEdge R440	Intel Xeon Silver 4216	No	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8
Red Hat Enterprise Linux 8 with PR/SM Driver Level 41 with Bundle Level H63	IBM z15 8561-T01	IBM z15	Yes	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8
Red Hat Enterprise Linux 8 with PR/SM Driver Level 41 with Bundle Level H63	IBM z15 8561-T01	IBM z15	No	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8
Red Hat Enterprise Linux 8 with PowerVM FW950.80 with VIOS 3.1.2.00	IBM 9009-42A	IBM POWER9	Yes	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8
Red Hat Enterprise Linux 8 with PowerVM FW950.80 with VIOS 3.1.2.00	IBM 9009-42A	IBM POWER9	No	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8
Red Hat Enterprise Linux 8 with PowerVM FW1040.00 with VIOS 3.1.3.00	IBM 9080-HEX	IBM POWER10	Yes	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8
Red Hat Enterprise Linux 8 with PowerVM FW1040.00 with VIOS 3.1.3.00	IBM 9080-HEX	IBM POWER10	No	N/A	4.18.0-553.123.1.el8_10; 1.4.0-2.el8

Table 3: Tested Operational Environments - Software, Firmware, Hybrid

Vendor-Affirmed Operational Environments - Software, Firmware, Hybrid:

Operating System	Hardware Platform
Red Hat Enterprise Linux 8	Intel Xeon E5

Table 4: Vendor-Affirmed Operational Environments - Software, Firmware, Hybrid

CMVP makes no statement as to the correct operation of the module or the security strengths of the generated keys when so ported if the specific operational environment is not listed on the validation certificate.

2.3 Excluded Components

There are no components within the cryptographic boundary excluded from the FIPS 140-3 requirements.

2.4 Modes of Operation

Modes List and Description:

Mode Name	Description	Type	Status Indicator
Approved mode	Automatically entered whenever an approved service is requested	Approved	Mapped to approved service indicator in Section 4.3 for all approved algorithms except GCM: respective approved service function returns indicator 0. For GCM: <code>crypto_aead_get_flags(tfm)</code> has the <code>CRYPTO_TFM_FIPS_COMPLIANCE</code> flag set
Non-approved mode	Automatically entered whenever a non-approved service is requested	Non-Approved	No service indicator required for non-approved services per IG 2.4.C

Table 5: Modes List and Description

Once the module is installed and initilized as per Section 11.1, after passing all pre-operational self-tests and cryptographic algorithm self-tests executed on start-up, the module automatically transitions to the approved mode. On startup, no operator intervention is required to reach this point.

Mode Change Instructions and Status:

The module automatically switches between the approved and non-approved modes depending on the services requested by the operator. The status indicator of the mode of operation is equivalent to the indicator of the service that was requested.

2.5 Algorithms

Approved Algorithms:

Algorithm	CAVP Cert	Properties	Reference
AES-CBC	A7185, A7189, A7197, A7202, A7205, A7402	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38A
AES-CBC-CS3	A7193, A7200, A7209	Direction - decrypt, encrypt Key Length - 128, 192, 256	SP 800-38A

Algorithm	CAVP Cert	Properties	Reference
AES-CCM	A7189, A7197, A7202, A7205	Key Length - 128, 192, 256	SP 800-38C
AES-CFB128	A7192, A7199, A7208	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38A
AES-CMAC	A7189, A7197, A7202, A7205	Direction - Generation Key Length - 128, 192, 256	SP 800-38B
AES-CTR	A7185, A7189, A7197, A7202, A7205, A7402	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38A
AES-ECB	A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7197, A7201, A7202, A7203, A7204, A7205, A7206, A7207	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38A
AES-GCM	A7185, A7186, A7188, A7189, A7191, A7197, A7202, A7204, A7205, A7207	Direction - Decrypt, Encrypt IV Generation - External Key Length - 128, 192, 256	SP 800-38D
AES-GCM	A7187, A7190, A7201, A7203, A7206	Direction - Encrypt IV Generation - Internal IV Generation Mode - 8.2.1 Key Length - 128, 192, 256	SP 800-38D
AES-GMAC	A7189, A7197, A7202, A7205	Direction - Decrypt, Encrypt IV Generation - External Key Length - 128, 192, 256	SP 800-38D
AES-XTS Testing Revision 2.0	A7185, A7189, A7197, A7202, A7205, A7402	Direction - Decrypt, Encrypt Key Length - 128, 256	SP 800-38E
Counter DRBG	A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7197, A7201, A7202, A7203, A7204, A7205, A7206, A7207	Prediction Resistance - No, Yes Mode - AES-128, AES-192, AES-256 Derivation Function Enabled - Yes	SP 800-90A Rev. 1
Hash DRBG	A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7194, A7195, A7196, A7197, A7201, A7203, A7204, A7205, A7206, A7207	Prediction Resistance - No, Yes	SP 800-90A Rev. 1

Algorithm	CAVP Cert	Properties	Reference
		Mode - SHA-1, SHA2-256, SHA2-512	
HMAC DRBG	A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7194, A7195, A7196, A7197, A7201, A7203, A7204, A7205, A7206, A7207	Prediction Resistance - No, Yes Mode - SHA-1, SHA2-256, SHA2-512	SP 800-90A Rev. 1
HMAC-SHA-1	A7194, A7195, A7196, A7197, A7205	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA2-224	A7194, A7195, A7196, A7197, A7205	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA2-256	A7194, A7195, A7196, A7197, A7205	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA2-384	A7194, A7195, A7196, A7197, A7205	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA2-512	A7194, A7195, A7196, A7197, A7205	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA3-224	A7198, A7210	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA3-256	A7198, A7210	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA3-384	A7198, A7210	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA3-512	A7198, A7210	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
RSA SigVer (FIPS186-5)	A7197	Modulo - 2048, 3072, 4096 Signature Type - pkcs1v1.5	FIPS 186-5
SHA-1	A7194, A7195, A7196, A7197, A7205	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 180-4
SHA2-224	A7194, A7195, A7196, A7197, A7205	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 180-4

Algorithm	CAVP Cert	Properties	Reference
SHA2-256	A7194, A7195, A7196, A7197, A7205	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 180-4
SHA2-384	A7194, A7195, A7196, A7197, A7205	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 180-4
SHA2-512	A7194, A7195, A7196, A7197, A7205	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 180-4
SHA3-224	A7198, A7210	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 202
SHA3-256	A7198, A7210	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 202
SHA3-384	A7198, A7210	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 202
SHA3-512	A7198, A7210	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2	FIPS 202

Table 6: Approved Algorithms

Vendor-Affirmed Algorithms:

N/A for this module.

Non-Approved, Allowed Algorithms:

N/A for this module.

Non-Approved, Allowed Algorithms with No Security Claimed:

N/A for this module.

Non-Approved, Not Allowed Algorithms:

Name	Use and Function
AES-GCM with external IV	Encryption with external IV (not compliant to FIPS 140-3 IG C.H)
KBKDF (libkcapi)	Key derivation with implementation not tested by CAVP
HKDF (libkcapi)	Key derivation with implementation not tested by CAVP
PBKDF2 (libkcapi)	Password-based key derivation with implementation not tested by CAVP
RSA	Encryption primitive; Decryption primitive (not compliant to SP 800-56Br2)
RSA with PKCS#1 v1.5 padding	Signature generation (pre-hashed message); Signature verification (pre-hashed message)

Table 7: Non-Approved, Not Allowed Algorithms

2.6 Security Function Implementations

Name	Type	Description	Properties	Algorithms
Symmetric Encryption with AES	BC-UnAuth	Symmetric Encryption using AES		AES-CBC: (A7185, A7189, A7197, A7202, A7205, A7402) AES-CBC-CS3: (A7193, A7200, A7209) AES-CFB128: (A7192, A7199, A7208) AES-CTR: (A7185, A7189, A7197, A7202, A7205, A7402) AES-ECB: (A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7197, A7201, A7202, A7203, A7204, A7205, A7206, A7207) AES-XTS Testing Revision 2.0: (A7185, A7189, A7197, A7202, A7205, A7402)
Symmetric Decryption with AES	BC-UnAuth	Decrypt a ciphertext with AES		AES-CBC: (A7185, A7189, A7197, A7202, A7205, A7402)

Name	Type	Description	Properties	Algorithms
				AES-CBC-CS3: (A7193, A7200, A7209) AES-CFB128: (A7192, A7199, A7208) AES-CTR: (A7185, A7189, A7197, A7202, A7205, A7402) AES-ECB: (A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7197, A7201, A7202, A7203, A7204, A7205, A7206, A7207) AES-XTS Testing Revision 2.0: (A7185, A7189, A7197, A7202, A7205, A7402)
Message Digest with SHA	SHA	Compute a message digest		SHA-1: (A7194, A7195, A7196, A7197, A7205) SHA2-224: (A7194, A7195, A7196, A7197, A7205) SHA2-256: (A7194, A7195, A7196, A7197, A7205) SHA2-384: (A7194, A7195, A7196, A7197, A7205) SHA2-512: (A7194, A7195, A7196, A7197, A7205) SHA3-224: (A7198, A7210) SHA3-256: (A7198, A7210) SHA3-384: (A7198, A7210)

Name	Type	Description	Properties	Algorithms
				SHA3-512: (A7198, A7210)
Message Authentication Code (MAC) with HMAC	MAC	Compute a MAC tag		HMAC-SHA-1: (A7194, A7195, A7196, A7197, A7205) HMAC-SHA2-224: (A7194, A7195, A7196, A7197, A7205) HMAC-SHA2-256: (A7194, A7195, A7196, A7197, A7205) HMAC-SHA2-384: (A7194, A7195, A7196, A7197, A7205) HMAC-SHA2-512: (A7194, A7195, A7196, A7197, A7205) HMAC-SHA3-224: (A7198, A7210) HMAC-SHA3-256: (A7198, A7210) HMAC-SHA3-384: (A7198, A7210) HMAC-SHA3-512: (A7198, A7210)
Message Authentication Code (MAC) with AES	MAC	Compute a MAC tag		AES-CMAC: (A7189, A7197, A7202, A7205) AES-GMAC: (A7189, A7197, A7202, A7205)
Random Number Generation with HMAC_DRBG	DRBG	Generate random bitstrings		HMAC DRBG: (A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7194, A7195, A7196, A7197, A7201, A7203, A7204,

Name	Type	Description	Properties	Algorithms
				A7205, A7206, A7207)
Random Number Generation with Hash_DRBG	DRBG	Generate random numbers from DRBGs		Hash DRBG: (A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7194, A7195, A7196, A7197, A7201, A7203, A7204, A7205, A7206, A7207)
Random Number Generation with CTR_DRBG	DRBG	Generate random numbers from DRBGs		Counter DRBG: (A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7197, A7201, A7202, A7203, A7204, A7205, A7206, A7207)
Signature Verification with RSA	DigSig-SigVer	Internal function for RSA signature verification for integrity test for kernel crypto object files	Padding:PKCS#1 v1.5 Hashes:SHA-256 Key size(s):3072 bits (128 bits)	RSA SigVer (FIPS186-5): (A7197)
Authenticated Symmetric Encryption with AES	BC-Auth	Encrypt and authenticate a plaintext		AES-CCM: (A7189, A7197, A7202, A7205) AES-GCM: (A7185, A7186, A7187, A7188, A7189, A7190, A7191, A7197, A7201, A7202, A7203, A7204, A7205, A7206, A7207)
Authenticated Symmetric Decryption with AES	BC-Auth	Decrypt and authenticate a ciphertext		AES-CCM: (A7189, A7197, A7202, A7205) AES-GCM: (A7185, A7186, A7187, A7188, A7189, A7190, A7191,

Name	Type	Description	Properties	Algorithms
				A7197, A7201, A7202, A7203, A7204, A7205, A7206, A7207)

Table 8: Security Function Implementations

2.7 Algorithm Specific Information

2.7.1 AES GCM IV

The Crypto Officer shall consider the following requirements and restrictions when using the module.

For IPsec, the module offers the AES GCM implementation and uses the context of Scenario 1 of FIPS 140-3 IG C.H. The mechanism for IV generation is compliant with RFC 4106. IVs generated using this mechanism may only be used in the context of AES GCM encryption within the IPsec protocol.

The module does not implement IPsec. The module's implementation of AES GCM is used together with an application that runs outside the module's cryptographic boundary. This application must use RFC 7296 compliant IKEv2 to establish the shared secret SKEYSEED from which the AES GCM encryption keys are derived.

The design of the IPsec protocol implicitly ensures that the counter (the nonce_explicit part of the IV) does not exhaust the maximum number of possible values for a given session key.

In the event the module's power is lost and restored, the consuming application must ensure that a new key for use with the AES GCM key encryption or decryption under this scenario shall be established.

The module also provides a non-approved AES GCM encryption service which accepts arbitrary external IVs from the operator. This service can be requested by invoking the crypto_aead_encrypt API function with an AES GCM handle. When this is the case, the API will not set an approved service indicator, as described in section 4.3.

2.7.2 AES XTS

The length of a single data unit encrypted or decrypted with AES XTS shall not exceed 220 AES blocks, that is 16MB, of data per XTS instance. An XTS instance is defined in Section 4 of SP 800-38E.

The XTS mode shall only be used for the cryptographic protection of data on storage devices. It shall not be used for other purposes, such as the encryption of data in transit.

To meet the requirement stated in IG C.I, the module implements a check to ensure that the two AES keys used in AES XTS mode are not identical. As the module does not implement symmetric key generation, this check is performed when the keys are input by the operator. Key_1 and Key_2 shall be generated and/or established independently according to the rules for component symmetric keys from NIST SP 800-133r2, Section 6.3.

2.7.3 RSA

For RSA signature verification, the module supports modulus size 3072 bits. The supported modulus size has been CAVP tested.

2.7.4 SHA-3

The module provides SHA-3 hash functions compliant with IG C.C. Every implementation of each SHA-3 function was tested and validated on all the module's operating environments. SHAKE functions are not implemented. SHA-3 hash functions are also used as part of a higher-level algorithm for HMAC.

2.7.5 SHA-1

Digital signature generation using SHA-1 is non-approved and not allowed in approved services.

2.8 RBG and Entropy

Cert Number	Vendor Name
E174	Red Hat, LLC

Table 9: Entropy Certificates

Name	Type	Operational Environment	Sample Size	Entropy per Sample	Conditioning Component
RHEL 8 Kernel CPU Time Jitter RNG Entropy Source	Non-Physical	Red Hat Enterprise Linux 8 on Dell PowerEdge R440; Red Hat Enterprise Linux 8 on IBM z15 8561-T01; Red Hat Enterprise Linux 8 on IBM 9009-42A; Red Hat Enterprise Linux 8 on IBM 9080-HEX	64 bits	57 bits	Linear-Feedback Shift Register (LFSR)

Table 10: Entropy Sources

The module implements three different Deterministic Random Bit Generator (DRBG) implementations based on SP 800-90Ar1: Counter DRBG, Hash DRBG, and HMAC DRBG. Each of these DRBG implementations can be instantiated by the operator of the module, using the parameters listed specified in the Security Function Implementations table. When instantiated, these DRBGs can be used to generate random numbers for external usage.

The module complies with the Public Use Document for ESV certificate E174 by reading entropy data from the `jent_kcapi_random()` function, which corresponds to the `GetEntropy()` conceptual interface. This function outputs 256 bits of full entropy.

The operational environment on the ESV certificate is identical to the operating system described in this document, and the entropy source is implemented inside the cryptographic boundary. Thus, the module is compliant with scenario 1 of IG 9.3.A. There are no maintenance requirements for the entropy source.

2.9 Key Generation

The module does not provide key generation.

2.10 Key Establishment

The module does not provide key establishment.

2.11 Industry Protocols

AES GCM with internal IV generation in the approved mode is compliant with RFC 4106 and shall only be used in conjunction with the IPsec protocol. No parts of this protocol, other than the AES GCM implementation, have been tested by the CAVP and CMVP.

3 Cryptographic Module Interfaces

3.1 Ports and Interfaces

Physical Port	Logical Interface(s)	Data That Passes
N/A	Data Input	API data input parameters, AF_ALG type sockets
N/A	Data Output	API data output parameters, AF_ALG type sockets
N/A	Control Input	API function calls, API control input parameters, AF_ALG type sockets, kernel command line
N/A	Status Output	API return values, AF_ALG type sockets, kernel logs

Table 11: Ports and Interfaces

The logical interfaces are the APIs through which the applications request services. These logical interfaces are logically separated from each other by the API design, AF_ALG type socket that allows the applications running in the user space to request cryptographic services from the module.

The module does not support a control output interface.

4 Roles, Services, and Authentication

4.1 Authentication Methods

The module does not implement authentication.

4.2 Roles

Name	Type	Operator Type	Authentication Methods
Crypto Officer	Role	CO	None

Table 12: Roles

The module supports the Crypto Officer role only. This sole role is implicitly and always assumed by the operator of the module. No support is provided for multiple concurrent operators.

4.3 Approved Services

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
Symmetric Encryption	Symmetric Encryption using AES	crypto_skcipher_setkey returns 0	AES key, plaintext	Ciphertext	Symmetric Encryption with AES	Crypto Officer - AES key: W,E
Symmetric Decryption	Symmetric Decryption using AES	crypto_skcipher_setkey returns 0	AES key, ciphertext	Plaintext	Symmetric Decryption with AES	Crypto Officer - AES key: W,E
Authenticated Symmetric Encryption	Encrypt and authenticate a plaintext	For all except AES GCM: crypto_aead_setkey returns 0; For AES GCM: crypto_aead_get_flags(tfm) has the CRYPTO_TFM_FIPS_COMPLIANCE flag set	AES key, plaintext, IV	Ciphertext, MAC tag	Authenticated Symmetric Encryption with AES	Crypto Officer - AES key: W,E - GCM IV: G,R,E
Authenticated Symmetric Decryption	Decrypt and authenticate a ciphertext	For all except AES GCM: crypto_aead_setkey returns 0; For AES GCM: crypto_aead_get_flags(tfm) has the	AES key, ciphertext, MAC tag, IV	Plaintext	Authenticated Symmetric Decryption with AES	Crypto Officer - AES key: W,E - GCM IV: W,E

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
		CRYPTO_TFM_FIPS_COMPLIANCE flag set				
Message Authentication Code (MAC)	Compute a MAC tag	crypto_shash_init returns 0	AES: AES key, message; HMAC: HMAC key, message	MAC tag	Message Authentication Code (MAC) with AES Message Authentication Code (MAC) with HMAC	Crypto Officer - AES key: W,E - HMAC key: W,E
Random Number Generation	Generate random bytes	crypto_rng_get_bytes returns 0	Output length	Random bytes	Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG	Crypto Officer - Entropy input: G,E,Z - CTR_DRBG Seed (IG D.L): G,E - Hash_DRBG Seed (IG D.L): G,E - HMAC_DRBG Seed (IG D.L): G,E - CTR_DRBG Internal State (V, Key) (IG D.L): G,W,E - Hash_DRBG Internal State (V, C) (IG D.L): G,W,E - HMAC_DRBG Internal

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
						State (V, Key) (IG D.L): G,W,E
Random number generation using entropy source	Get entropy from a dedicated instance of the Jitter	crypto_rng_get_bytes returns 0	Output length	Random bytes	None	Crypto Officer
Message digest	Compute a message digest	crypto_shash_init returns 0	Message	Digest value	Message Digest with SHA	Crypto Officer
Error detection code	Compute an EDC (crc32, crct10dif)	None	Message	EDC	None	Crypto Officer
Compression	Compress data (deflate, lz4, lz4hc, lzo, zlibdeflate, zstd)	None	Data	Compressed data	None	Crypto Officer
Generic system call	Use the kernel to perform various non-cryptographic operations	None	Identifier, various arguments	Various return values	None	Crypto Officer
Show module name and version	Return the module name and version information	None	N/A	Module name and version	None	Unauthenticated
Show status	Return the module status	None	N/A	Module status	None	Unauthenticated

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
Self-test	Perform the CASTs and integrity tests	None	N/A	Pass/fail result of self-tests	Symmetric Encryption with AES Authenticated Symmetric Encryption with AES Symmetric Decryption with AES Authenticated Symmetric Decryption with AES Message Digest with SHA Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG Message Authentication Code (MAC) with HMAC Message	Unauthenticated

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
					Authentication Code (MAC) with AES Signature Verification with RSA	
Zeroization	Zeroize SSPs	None	Any SSP	N/A	None	Crypto Officer - AES key: Z - HMAC key: Z - Entropy input: Z - CTR_DRBG Seed (IG D.L): Z - Hash_DRBG Seed (IG D.L): Z - HMAC_DRBG Seed (IG D.L): Z - CTR_DRBG Internal State (V, Key) (IG D.L): Z - Hash_DRBG Internal State (V, C) (IG D.L): Z - HMAC_DRBG Internal State (V, Key) (IG D.L): Z - GCM IV: Z

Table 13: Approved Services

The table above lists the approved services. The following convention is used to specify access rights to SSPs:

- **Generate (G):** The module generates or derives the SSP.
- **Read (R):** The SSP is read from the module (e.g. the SSP is output).
- **Write (W):** The SSP is updated, imported, or written to the module.
- **Execute (E):** The module uses the SSP in performing a cryptographic operation.
- **Zeroize (Z):** The module zeroizes the SSP.

4.4 Non-Approved Services

Name	Description	Algorithms	Role
AES GCM external IV encryption	Encrypt a plaintext using AES GCM with an external IV	AES-GCM with external IV	CO
Key derivation	Derive a key from a key-derivation key or a shared secret	KBKDF (libkcapi) HKDF (libkcapi)	CO
Password-based key derivation	Derive a key from a password	PBKDF2 (libkcapi)	CO
RSA encryption primitive	Compute the raw RSA encryption of a plaintext	RSA	CO
RSA decryption primitive	Compute the raw RSA decryption of a ciphertext	RSA	CO
RSA signature generation (pre-hashed message)	Generate a digital signature for a pre-hashed message	RSA with PKCS#1 v1.5 padding	CO
RSA signature verification (pre-hashed message)	Verify a digital signature for a pre-hashed message	RSA with PKCS#1 v1.5 padding	CO

Table 14: Non-Approved Services

4.5 External Software/Firmware Loaded

The module does not load external software or firmware.

5 Software/Firmware Security

5.1 Integrity Techniques

The static kernel binary is integrity tested using an HMAC-SHA2-512 calculation performed by the sha512hmac utility (which utilizes the module's HMAC and SHA-512 implementations). The sha512hmac utility first executes the HMAC-SHA2-512 self-test. After this self-test is successful, the sha512hmac utility is used to perform an HMAC calculation of the libkcap library, the kernel binary, and of its own binary to verify their integrity.

After the integrity of these components has been verified, the self-test for the RSA signature verification implementation is run. Upon successful run of this self-test, the RSA signature verification implementation of the kernel (with PKCS#1 v1.5 padding, SHA-256, and a 3072-bit key) is used to verify the integrity of the crypto object files listed in section 2.2 and loaded at start-up.

5.2 Initiate on Demand

Integrity tests are performed as part of the pre-operational self-tests, which are executed when the module is initialized. The integrity tests can be invoked on demand by unloading and subsequently re-initializing the module, which will perform (among others) the software integrity tests.

6 Operational Environment

6.1 Operational Environment Type and Requirements

Type of Operational Environment: Modifiable

How Requirements are Satisfied:

The operating system provides process isolation and memory protection mechanisms that ensure appropriate separation for memory access among the processes on the system. Each process has control over its own data and uncontrolled access to the data of other processes is prevented.

6.2 Configuration Settings and Restrictions

The module shall be installed as stated in Section 11.1.

Instrumentation tools like the ptrace system call, gdb and strace, as well as other tracing mechanisms offered by the Linux environment such as ftrace or systemtap, shall not be used in the operational environments. The use of any of these tools implies that the cryptographic module is running in a non-validated operational environment.

6.3 Additional Information

The Red Hat Enterprise Linux operating system is used as the basis of other products which include but are not limited to:

- Red Hat Enterprise Linux CoreOS
- Red Hat Ansible Automation Platform
- Red Hat OpenStack Platform
- Red Hat OpenShift
- Red Hat Gluster Storage
- Red Hat Satellite

Compliance is maintained for these products whenever the binary is found unchanged.

7 Physical Security

The module is comprised of software only and therefore this section is not applicable.

8 Non-Invasive Security

This module does not implement any non-invasive security mechanism and therefore this section is not applicable.

9 Sensitive Security Parameters Management

9.1 Storage Areas

Storage Area Name	Description	Persistence Type
RAM	Temporary storage for SSPs used by the module as part of service execution	Dynamic

Table 15: Storage Areas

The module does not perform persistent storage of SSPs. The SSPs are temporarily stored in the RAM in plaintext form. SSPs are provided to the module by the calling process and are destroyed when released by the appropriate zeroization function calls.

9.2 SSP Input-Output Methods

Name	From	To	Format Type	Distribution Type	Entry Type	SFI or Algorithm
API input parameters; AF_ALG_type sockets (input)	Operator calling application (TOEPP)	Cryptographic module	Plaintext	Manual	Electronic	
API output parameters; AF_ALG_type sockets (output)	Cryptographic module	Operator calling application (TOEPP), kernel space	Plaintext	Manual	Electronic	

Table 16: SSP Input-Output Methods

9.3 SSP Zeroization Methods

Zeroization Method	Description	Rationale	Operator Initiation
Free cipher handle	Zeroizes the SSPs contained within the cipher handle.	Memory occupied by SSPs is overwritten with zeroes and then it is released, which renders the SSP values irretrievable. The completion of the zeroization routine indicates that the zeroization procedure succeeded.	By calling the appropriate cipher related zeroization API functions: AES key: <code>crypto_free_skcipher</code> and <code>crypto_free_aead</code> ; HMAC key: <code>crypto_free_shash</code> and <code>crypto_free_ahash</code> ; DRBG internal state: <code>crypto_free_rng</code>

Zeroization Method	Description	Rationale	Operator Initiation
Automatic	Automatically zeroized by the module when no longer needed	Memory occupied by SSPs is overwritten with zeroes, which renders the SSP values irretrievable.	N/A
Remove power from the module	De-allocates the volatile memory used to store SSPs	Volatile memory used by the module is overwritten within nanoseconds when power is removed. Module power off indicates that the zeroization procedure succeeded. The successful removal of power implicitly indicates that the zeroization is complete.	By removing power

Table 17: SSP Zeroization Methods

9.4 SSPs

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
AES key	AES key used for encryption, decryption, and computing MAC tags.	XTS: 128, 256 bits; Other modes: 128, 192, 256 bits - XTS: 128, 256 bits; Other modes: 128, 192, 256 bits	Symmetric Key - CSP			Symmetric Encryption with AES Authenticated Symmetric Encryption with AES Symmetric Decryption with AES Authenticated Symmetric Decryption with AES Message Authentication Code (MAC) with AES
HMAC key	HMAC key used for	112-524288 bits -	Authentication key - CSP			Message Authentication

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
	computing MAC tags	112-256 bits				n Code (MAC) with HMAC
Entropy input	Entropy input used for Random number generation	128-384 bits - 128-384 bits	Entropy Input - CSP			Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG
CTR_DRBG Seed (IG D.L)	DRBG seed derived from Entropy Input	256, 320, 384 bits - 128, 192, 256 bits	Seed - CSP	Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG		Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG
Hash_DRBG Seed (IG D.L)	DRBG seed derived from Entropy Input	440, 888 bits - 128, 256 bits	Seed - CSP	Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG		Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
				Random Number Generation with Hash_DRBG		Random Number Generation with Hash_DRBG
HMAC_DRBG Seed (IG D.L)	DRBG seed derived from Entropy Input	440, 888 bits - 128, 256 bits	Seed - CSP	Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG		Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG
CTR_DRBG Internal State (V, Key) (IG D.L)	Internal state of Counter DRBG instance	256, 320, 384 bits - 128, 192, 256 bits	Internal state - CSP	Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG		Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG
Hash_DRBG Internal State (V, C) (IG D.L)	Internal state of Hash DRBG instance	880, 1776 bits - 128, 256 bits	Internal state - CSP	Random Number Generation with CTR_DRBG		Random Number Generation with CTR_DRBG

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
				Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG		Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG
HMAC_DRBG Internal State (V, Key) (IG D.L)	Internal state of HMAC_DRBG instance	320, 512, 1024 bits - 128, 256 bits	Internal state - CSP	Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG		Random Number Generation with CTR_DRBG Random Number Generation with HMAC_DRBG Random Number Generation with Hash_DRBG
GCM IV	AES GCM IV used for authenticated encryption and decryption	96 bits - N/A	Initialization vector - PSP	Authenticated Symmetric Encryption with AES		Authenticated Symmetric Encryption with AES Authenticated Symmetric Decryption with AES

Table 18: SSP Table 1

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
AES key	API input parameters;	RAM:Plaintext	From service invocation to	Free cipher handle Remove	

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
	AF_ALG_type sockets (input)		service completion	power from the module	
HMAC key	API input parameters; AF_ALG_type sockets (input)	RAM:Plaintext	From service invocation to service completion	Free cipher handle Remove power from the module	
Entropy input		RAM:Plaintext	From service invocation to service completion	Free cipher handle Remove power from the module	CTR_DRBG Seed (IG D.L):Derives Hash_DRBG Seed (IG D.L):Derives HMAC_DRBG Seed (IG D.L):Derives
CTR_DRBG Seed (IG D.L)		RAM:Plaintext	From service invocation to service completion	Automatic Remove power from the module	Entropy Input (IG D.L):Derived From CTR_DRBG Internal State (V, Key) (IG D.L):Derives
Hash_DRBG Seed (IG D.L)		RAM:Plaintext	From service invocation to service completion	Automatic Remove power from the module	Entropy Input (IG D.L):Derived From Hash_DRBG Internal State (V, C) (IG D.L):Derives
HMAC_DRBG Seed (IG D.L)		RAM:Plaintext	From service invocation to service completion	Automatic Remove power from the module	Entropy Input (IG D.L):Derived From HMAC_DRBG Internal State (V, Key) (IG D.L):Derives
CTR_DRBG Internal State (V, Key) (IG D.L)		RAM:Plaintext	From service invocation to service completion	Free cipher handle Remove power from the module	CTR_DRBG Seed (IG D.L):Derived From
Hash_DRBG Internal State (V, C) (IG D.L)		RAM:Plaintext	From service invocation to service completion	Free cipher handle Remove	Hash_DRBG Seed (IG D.L):Derived From

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
				power from the module	
HMAC_DRBG Internal State (V, Key) (IG D.L)		RAM:Plaintext	From service invocation to service completion	Free cipher handle Remove power from the module	HMAC_DRBG Seed (IG D.L):Derived From
GCM IV	API input parameters; AF_ALG_type sockets (input) API output parameters; AF_ALG_type sockets (output)	RAM:Plaintext	From service invocation to service completion	Free cipher handle Remove power from the module	

Table 19: SSP Table 2

9.5 Transitions

The SHA-1 algorithm as implemented by the module will be non-approved for all purposes, starting January 1, 2031.

10 Self-Tests

10.1 Pre-Operational Self-Tests

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details
HMAC-SHA2-512	128-bit key	Message Authentication	SW/FW Integrity	Module becomes operational and services are available for use.	Integrity test for kernel binary, libkcapi components and sha512hmac binary
RSA SigVer (FIPS186-5) (A7197)	3072-bit key with SHA-256	Signature Verification	SW/FW Integrity	Module becomes operational and services are available for use.	Integrity test for kernel crypto object files

Table 20: Pre-Operational Self-Tests

The pre-operational software integrity tests are performed automatically when the module is powered on, before the module transitions into the operational state. The algorithms used for the integrity test (i.e., HMAC-SHA2-512 and RSA SigVer with 3072-bit key) run their CASTs before the integrity test is performed. While the module is executing the self-tests, services are not available, and data output (via the data output interface) is inhibited until the pre-operational software integrity self-tests are successfully completed. The module transitions to the operational state only after the pre-operational self-tests are passed successfully.

10.2 Conditional Self-Tests

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
SHA-1 (A7194)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA-1 (A7195)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA-1 (A7196)	0-8184 bit messages	KAT	CAST	Module becomes operational and services	Message digest	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
				are available for use.		
SHA-1 (A7197)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA-1 (A7205)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-224 (A7194)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-224 (A7195)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-224 (A7196)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-224 (A7197)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-224 (A7205)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
SHA2-256 (A7194)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-256 (A7195)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-256 (A7196)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-256 (A7197)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-256 (A7205)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-384 (A7194)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-384 (A7195)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-384 (A7196)	0-8184 bit messages	KAT	CAST	Module becomes	Message digest	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
				operational and services are available for use.		
SHA2-384 (A7197)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-384 (A7205)	0-8184 bit messages	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-512 (A7194)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-512 (A7195)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-512 (A7196)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-512 (A7197)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA2-512 (A7205)	0-8184 bit message	KAT	CAST	Module becomes operational and services	Message digest	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
				are available for use.		
SHA3-224 (A7198)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA3-224 (A7210)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA3-256 (A7198)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA3-256 (A7210)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA3-384 (A7198)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA3-384 (A7210)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
SHA3-512 (A7198)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
SHA3-512 (A7210)	0-8184 bit message	KAT	CAST	Module becomes operational and services are available for use.	Message digest	Module initialization
AES-ECB - Encrypt (A7185)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7186)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7187)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7188)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7189)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7190)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-ECB - Encrypt (A7191)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7197)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7201)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7202)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7203)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7204)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7205)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-ECB - Encrypt (A7206)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Encrypt (A7207)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-ECB - Decrypt (A7185)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7186)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7187)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7188)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7189)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-ECB - Decrypt (A7190)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7191)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7197)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7201)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7202)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7203)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7204)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-ECB - Decrypt (A7205)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7206)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-ECB - Decrypt (A7207)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CBC - Encrypt (A7189)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CBC - Encrypt (A7197)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CBC - Encrypt (A7205)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CBC - Encrypt (A7402)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-CBC - Decrypt (A7189)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CBC - Decrypt (A7197)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CBC - Decrypt (A7205)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CBC - Decrypt (A7402)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CBC-CS3 - Encrypt (A7193)	128 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CBC-CS3 - Encrypt (A7200)	128 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CBC-CS3 - Encrypt (A7209)	128 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-CFB128 - Encrypt (A7192)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CFB128 - Encrypt (A7199)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CFB128 - Encrypt (A7208)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CTR - Encrypt (A7185)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CTR - Encrypt (A7189)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CTR - Encrypt (A7197)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CTR - Encrypt (A7205)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-CTR - Encrypt (A7402)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CCM - Encrypt (A7189)	128, 192, 256 bit keys; 128-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CCM - Encrypt (A7197)	128, 192, 256 bit keys; 128-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CCM - Encrypt (A7205)	128, 192, 256 bit keys; 128-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7185)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7186)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7187)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-GCM - Encrypt (A7188)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7189)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7190)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7191)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7197)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7201)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7202)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-GCM - Encrypt (A7203)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7204)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7205)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7206)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-GCM - Encrypt (A7207)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-XTS Testing Revision 2.0 - Encrypt (A7189)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-XTS Testing Revision 2.0 - Encrypt (A7197)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-XTS Testing	128 and 256 bit keys	KAT	CAST	Module becomes	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
Revision 2.0 - Encrypt (A7202)				operational and services are available for use.		
AES-XTS Testing Revision 2.0 - Encrypt (A7205)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-XTS Testing Revision 2.0 - Encrypt (A7402)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Encryption	Module initialization
AES-CMAC - Encrypt (A7189)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
AES-CMAC - Encrypt (A7197)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
AES-CMAC - Encrypt (A7205)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
AES-CBC-CS3 - Decrypt (A7193)	128 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CBC-CS3 - Decrypt (A7200)	128 bit keys	KAT	CAST	Module becomes operational and services	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
				are available for use.		
AES-CBC- CS3 - Decrypt (A7209)	128 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CFB128 - Decrypt (A7192)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CFB128 - Decrypt (A7199)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CFB128 - Decrypt (A7208)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CTR - Decrypt (A7185)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CTR - Decrypt (A7189)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CTR - Decrypt (A7197)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-CTR - Decrypt (A7205)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CTR - Decrypt (A7402)	128, 192, 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CCM - Decrypt (A7189)	128, 192, 256 bit keys; 128-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CCM - Decrypt (A7197)	128, 192, 256 bit keys; 128-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CCM - Decrypt (A7205)	128, 192, 256 bit keys; 128-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7185)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7186)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-GCM - Decrypt (A7187)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7188)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7189)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7190)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7191)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7197)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7201)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-GCM - Decrypt (A7202)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7203)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7204)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7205)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7206)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-GCM - Decrypt (A7207)	128, 192, 256 bit keys, 96-bit IVs	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-XTS Testing Revision 2.0 - Decrypt (A7189)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-XTS Testing	128 and 256 bit keys	KAT	CAST	Module becomes	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
Revision 2.0 - Decrypt (A7197)				operational and services are available for use.		
AES-XTS Testing Revision 2.0 - Decrypt (A7202)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-XTS Testing Revision 2.0 - Decrypt (A7205)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-XTS Testing Revision 2.0 - Decrypt (A7402)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Decryption	Module initialization
AES-CMAC - Decrypt (A7189)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
AES-CMAC - Decrypt (A7197)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
AES-CMAC - Decrypt (A7205)	128 and 256 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA-1 (A7194)	32-64 bit keys	KAT	CAST	Module becomes operational and services	Message authentication	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
				are available for use.		
HMAC-SHA-1 (A7195)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA-1 (A7196)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA-1 (A7197)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA-1 (A7205)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-224 (A7194)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-224 (A7195)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-224 (A7196)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC-SHA2-224 (A7197)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-224 (A7205)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-256 (A7194)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-256 (A7195)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-256 (A7196)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-256 (A7197)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-256 (A7205)	32-64 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC-SHA2-384 (A7194)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-384 (A7195)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-384 (A7196)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-384 (A7197)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-384 (A7205)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA2-512 (A7194)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization. Before integrity test.
HMAC-SHA2-512 (A7195)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization. Before integrity test.

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC-SHA2-512 (A7196)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization. Before integrity test.
HMAC-SHA2-512 (A7197)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization. Before integrity test.
HMAC-SHA2-512 (A7205)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization. Before integrity test.
HMAC-SHA3-224 (A7198)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA3-224 (A7210)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA3-256 (A7198)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA3-256 (A7210)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC-SHA3-384 (A7198)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA3-384 (A7210)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA3-512 (A7198)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
HMAC-SHA3-512 (A7210)	32-1048 bit keys	KAT	CAST	Module becomes operational and services are available for use.	Message authentication	Module initialization
Counter DRBG (A7185)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7186)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7187)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
Counter DRBG (A7188)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7189)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7190)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7191)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7197)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7201)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7202)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
Counter DRBG (A7203)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7204)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7205)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7206)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Counter DRBG (A7207)	128, 192, 256 bit keys With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7185)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7186)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7187)	SHA-256 With/without PR;	KAT	CAST	Module becomes	SP 800-90Ar1 (instantiate,	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
	Health test per section 11.3 of SP 800-90Arev1			operational and services are available for use.	reseed, generate) health test	
Hash DRBG (A7188)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7189)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7190)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7191)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7194)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7195)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7196)	SHA-256 With/without PR; Health test per	KAT	CAST	Module becomes operational and services	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
	section 11.3 of SP 800-90Arev1			are available for use.		
Hash DRBG (A7197)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7201)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7203)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7204)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7205)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7206)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
Hash DRBG (A7207)	SHA-256 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC DRBG (A7185)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7186)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7187)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7188)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7189)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7190)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7191)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC DRBG (A7194)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7195)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7196)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7197)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7201)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7203)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7204)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC DRBG (A7205)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7206)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
HMAC DRBG (A7207)	SHA-256, SHA512 With/without PR; Health test per section 11.3 of SP 800-90Arev1	KAT	CAST	Module becomes operational and services are available for use.	SP 800-90Ar1 (instantiate, reseed, generate) health test	Module initialization
RSA SigVer (FIPS186-5) (A7197)	4096-bit key with SHA-256	KAT	CAST	Module becomes operational and services are available for use.	Verify	Module initialization. Before integrity test.
Entropy Source - Init RCT	1024 samples	RCT	CAST	Module becomes operational and services are available for use.	Entropy source start-up test	Entropy source initialization
Entropy Source - Init APT	1024 samples	APT	CAST	Module becomes operational and services are available for use.	Entropy source start-up test	Entropy source initialization
Entropy Source - Continuous RCT	Cutoff C = 61	RCT	CAST	Entropy source is operational	Entropy source continuous test	Continuously
Entropy Source - Continuous APT	Cutoff C = 355	APT	CAST	Entropy source is operational	Entropy source continuous test	Continuously

Table 21: Conditional Self-Tests

The module performs self-tests on all approved cryptographic algorithms as part of the approved services supported in the approved mode of operation, using the tests shown in the table above. Services are not available, and data output (via the data output interface) is inhibited during the conditional self-tests. If any of these tests fails, the module transitions to the Error State.

10.3 Periodic Self-Test Information

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
HMAC-SHA2-512	Message Authentication	SW/FW Integrity	On demand	Manually
RSA SigVer (FIPS186-5) (A7197)	Signature Verification	SW/FW Integrity	On demand	Manually

Table 22: Pre-Operational Periodic Information

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
SHA-1 (A7194)	KAT	CAST	On demand	Manually
SHA-1 (A7195)	KAT	CAST	On demand	Manually
SHA-1 (A7196)	KAT	CAST	On demand	Manually
SHA-1 (A7197)	KAT	CAST	On demand	Manually
SHA-1 (A7205)	KAT	CAST	On demand	Manually
SHA2-224 (A7194)	KAT	CAST	On demand	Manually
SHA2-224 (A7195)	KAT	CAST	On demand	Manually
SHA2-224 (A7196)	KAT	CAST	On demand	Manually
SHA2-224 (A7197)	KAT	CAST	On demand	Manually
SHA2-224 (A7205)	KAT	CAST	On demand	Manually
SHA2-256 (A7194)	KAT	CAST	On demand	Manually
SHA2-256 (A7195)	KAT	CAST	On demand	Manually
SHA2-256 (A7196)	KAT	CAST	On demand	Manually
SHA2-256 (A7197)	KAT	CAST	On demand	Manually
SHA2-256 (A7205)	KAT	CAST	On demand	Manually
SHA2-384 (A7194)	KAT	CAST	On demand	Manually
SHA2-384 (A7195)	KAT	CAST	On demand	Manually
SHA2-384 (A7196)	KAT	CAST	On demand	Manually
SHA2-384 (A7197)	KAT	CAST	On demand	Manually
SHA2-384 (A7205)	KAT	CAST	On demand	Manually
SHA2-512 (A7194)	KAT	CAST	On demand	Manually
SHA2-512 (A7195)	KAT	CAST	On demand	Manually
SHA2-512 (A7196)	KAT	CAST	On demand	Manually
SHA2-512 (A7197)	KAT	CAST	On demand	Manually
SHA2-512 (A7205)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
SHA3-224 (A7198)	KAT	CAST	On demand	Manually
SHA3-224 (A7210)	KAT	CAST	On demand	Manually
SHA3-256 (A7198)	KAT	CAST	On demand	Manually
SHA3-256 (A7210)	KAT	CAST	On demand	Manually
SHA3-384 (A7198)	KAT	CAST	On demand	Manually
SHA3-384 (A7210)	KAT	CAST	On demand	Manually
SHA3-512 (A7198)	KAT	CAST	On demand	Manually
SHA3-512 (A7210)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7185)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7186)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7187)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7188)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7189)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7190)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7191)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7197)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7201)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7202)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7203)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7204)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7205)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7206)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A7207)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7185)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7186)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7187)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
AES-ECB - Decrypt (A7188)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7189)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7190)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7191)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7197)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7201)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7202)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7203)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7204)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7205)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7206)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A7207)	KAT	CAST	On demand	Manually
AES-CBC - Encrypt (A7189)	KAT	CAST	On demand	Manually
AES-CBC - Encrypt (A7197)	KAT	CAST	On demand	Manually
AES-CBC - Encrypt (A7205)	KAT	CAST	On demand	Manually
AES-CBC - Encrypt (A7402)	KAT	CAST	On demand	Manually
AES-CBC - Decrypt (A7189)	KAT	CAST	On demand	Manually
AES-CBC - Decrypt (A7197)	KAT	CAST	On demand	Manually
AES-CBC - Decrypt (A7205)	KAT	CAST	On demand	Manually
AES-CBC - Decrypt (A7402)	KAT	CAST	On demand	Manually
AES-CBC-CS3 - Encrypt (A7193)	KAT	CAST	On demand	Manually
AES-CBC-CS3 - Encrypt (A7200)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
AES-CBC-CS3 - Encrypt (A7209)	KAT	CAST	On demand	Manually
AES-CFB128 - Encrypt (A7192)	KAT	CAST	On demand	Manually
AES-CFB128 - Encrypt (A7199)	KAT	CAST	On demand	Manually
AES-CFB128 - Encrypt (A7208)	KAT	CAST	On demand	Manually
AES-CTR - Encrypt (A7185)	KAT	CAST	On demand	Manually
AES-CTR - Encrypt (A7189)	KAT	CAST	On demand	Manually
AES-CTR - Encrypt (A7197)	KAT	CAST	On demand	Manually
AES-CTR - Encrypt (A7205)	KAT	CAST	On demand	Manually
AES-CTR - Encrypt (A7402)	KAT	CAST	On demand	Manually
AES-CCM - Encrypt (A7189)	KAT	CAST	On demand	Manually
AES-CCM - Encrypt (A7197)	KAT	CAST	On demand	Manually
AES-CCM - Encrypt (A7205)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7185)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7186)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7187)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7188)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7189)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7190)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7191)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7197)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7201)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7202)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
AES-GCM - Encrypt (A7203)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7204)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7205)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7206)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A7207)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Encrypt (A7189)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Encrypt (A7197)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Encrypt (A7202)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Encrypt (A7205)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Encrypt (A7402)	KAT	CAST	On demand	Manually
AES-CMAC - Encrypt (A7189)	KAT	CAST	On demand	Manually
AES-CMAC - Encrypt (A7197)	KAT	CAST	On demand	Manually
AES-CMAC - Encrypt (A7205)	KAT	CAST	On demand	Manually
AES-CBC-CS3 - Decrypt (A7193)	KAT	CAST	On demand	Manually
AES-CBC-CS3 - Decrypt (A7200)	KAT	CAST	On demand	Manually
AES-CBC-CS3 - Decrypt (A7209)	KAT	CAST	On demand	Manually
AES-CFB128 - Decrypt (A7192)	KAT	CAST	On demand	Manually
AES-CFB128 - Decrypt (A7199)	KAT	CAST	On demand	Manually
AES-CFB128 - Decrypt (A7208)	KAT	CAST	On demand	Manually
AES-CTR - Decrypt (A7185)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
AES-CTR - Decrypt (A7189)	KAT	CAST	On demand	Manually
AES-CTR - Decrypt (A7197)	KAT	CAST	On demand	Manually
AES-CTR - Decrypt (A7205)	KAT	CAST	On demand	Manually
AES-CTR - Decrypt (A7402)	KAT	CAST	On demand	Manually
AES-CCM - Decrypt (A7189)	KAT	CAST	On demand	Manually
AES-CCM - Decrypt (A7197)	KAT	CAST	On demand	Manually
AES-CCM - Decrypt (A7205)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7185)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7186)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7187)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7188)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7189)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7190)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7191)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7197)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7201)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7202)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7203)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7204)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7205)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7206)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A7207)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
AES-XTS Testing Revision 2.0 - Decrypt (A7189)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Decrypt (A7197)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Decrypt (A7202)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Decrypt (A7205)	KAT	CAST	On demand	Manually
AES-XTS Testing Revision 2.0 - Decrypt (A7402)	KAT	CAST	On demand	Manually
AES-CMAC - Decrypt (A7189)	KAT	CAST	On demand	Manually
AES-CMAC - Decrypt (A7197)	KAT	CAST	On demand	Manually
AES-CMAC - Decrypt (A7205)	KAT	CAST	On demand	Manually
HMAC-SHA-1 (A7194)	KAT	CAST	On demand	Manually
HMAC-SHA-1 (A7195)	KAT	CAST	On demand	Manually
HMAC-SHA-1 (A7196)	KAT	CAST	On demand	Manually
HMAC-SHA-1 (A7197)	KAT	CAST	On demand	Manually
HMAC-SHA-1 (A7205)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A7194)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A7195)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A7196)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A7197)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A7205)	KAT	CAST	On demand	Manually
HMAC-SHA2-256 (A7194)	KAT	CAST	On demand	Manually
HMAC-SHA2-256 (A7195)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
HMAC-SHA2-256 (A7196)	KAT	CAST	On demand	Manually
HMAC-SHA2-256 (A7197)	KAT	CAST	On demand	Manually
HMAC-SHA2-256 (A7205)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A7194)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A7195)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A7196)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A7197)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A7205)	KAT	CAST	On demand	Manually
HMAC-SHA2-512 (A7194)	KAT	CAST	On demand	Manually
HMAC-SHA2-512 (A7195)	KAT	CAST	On demand	Manually
HMAC-SHA2-512 (A7196)	KAT	CAST	On demand	Manually
HMAC-SHA2-512 (A7197)	KAT	CAST	On demand	Manually
HMAC-SHA2-512 (A7205)	KAT	CAST	On demand	Manually
HMAC-SHA3-224 (A7198)	KAT	CAST	On demand	Manually
HMAC-SHA3-224 (A7210)	KAT	CAST	On demand	Manually
HMAC-SHA3-256 (A7198)	KAT	CAST	On demand	Manually
HMAC-SHA3-256 (A7210)	KAT	CAST	On demand	Manually
HMAC-SHA3-384 (A7198)	KAT	CAST	On demand	Manually
HMAC-SHA3-384 (A7210)	KAT	CAST	On demand	Manually
HMAC-SHA3-512 (A7198)	KAT	CAST	On demand	Manually
HMAC-SHA3-512 (A7210)	KAT	CAST	On demand	Manually
Counter DRBG (A7185)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
Counter DRBG (A7186)	KAT	CAST	On demand	Manually
Counter DRBG (A7187)	KAT	CAST	On demand	Manually
Counter DRBG (A7188)	KAT	CAST	On demand	Manually
Counter DRBG (A7189)	KAT	CAST	On demand	Manually
Counter DRBG (A7190)	KAT	CAST	On demand	Manually
Counter DRBG (A7191)	KAT	CAST	On demand	Manually
Counter DRBG (A7197)	KAT	CAST	On demand	Manually
Counter DRBG (A7201)	KAT	CAST	On demand	Manually
Counter DRBG (A7202)	KAT	CAST	On demand	Manually
Counter DRBG (A7203)	KAT	CAST	On demand	Manually
Counter DRBG (A7204)	KAT	CAST	On demand	Manually
Counter DRBG (A7205)	KAT	CAST	On demand	Manually
Counter DRBG (A7206)	KAT	CAST	On demand	Manually
Counter DRBG (A7207)	KAT	CAST	On demand	Manually
Hash DRBG (A7185)	KAT	CAST	On demand	Manually
Hash DRBG (A7186)	KAT	CAST	On demand	Manually
Hash DRBG (A7187)	KAT	CAST	On demand	Manually
Hash DRBG (A7188)	KAT	CAST	On demand	Manually
Hash DRBG (A7189)	KAT	CAST	On demand	Manually
Hash DRBG (A7190)	KAT	CAST	On demand	Manually
Hash DRBG (A7191)	KAT	CAST	On demand	Manually
Hash DRBG (A7194)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
Hash DRBG (A7195)	KAT	CAST	On demand	Manually
Hash DRBG (A7196)	KAT	CAST	On demand	Manually
Hash DRBG (A7197)	KAT	CAST	On demand	Manually
Hash DRBG (A7201)	KAT	CAST	On demand	Manually
Hash DRBG (A7203)	KAT	CAST	On demand	Manually
Hash DRBG (A7204)	KAT	CAST	On demand	Manually
Hash DRBG (A7205)	KAT	CAST	On demand	Manually
Hash DRBG (A7206)	KAT	CAST	On demand	Manually
Hash DRBG (A7207)	KAT	CAST	On demand	Manually
HMAC DRBG (A7185)	KAT	CAST	On demand	Manually
HMAC DRBG (A7186)	KAT	CAST	On demand	Manually
HMAC DRBG (A7187)	KAT	CAST	On demand	Manually
HMAC DRBG (A7188)	KAT	CAST	On demand	Manually
HMAC DRBG (A7189)	KAT	CAST	On demand	Manually
HMAC DRBG (A7190)	KAT	CAST	On demand	Manually
HMAC DRBG (A7191)	KAT	CAST	On demand	Manually
HMAC DRBG (A7194)	KAT	CAST	On demand	Manually
HMAC DRBG (A7195)	KAT	CAST	On demand	Manually
HMAC DRBG (A7196)	KAT	CAST	On demand	Manually
HMAC DRBG (A7197)	KAT	CAST	On demand	Manually
HMAC DRBG (A7201)	KAT	CAST	On demand	Manually
HMAC DRBG (A7203)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
HMAC DRBG (A7204)	KAT	CAST	On demand	Manually
HMAC DRBG (A7205)	KAT	CAST	On demand	Manually
HMAC DRBG (A7206)	KAT	CAST	On demand	Manually
HMAC DRBG (A7207)	KAT	CAST	On demand	Manually
RSA SigVer (FIPS186-5) (A7197)	KAT	CAST	On demand	Manually
Entropy Source - Init RCT	RCT	CAST	On demand	Manually
Entropy Source - Init APT	APT	CAST	On demand	Manually
Entropy Source - Continuous RCT	RCT	CAST	On demand	Manually
Entropy Source - Continuous APT	APT	CAST	On demand	Manually

Table 23: Conditional Periodic Information

10.4 Error States

Name	Description	Conditions	Recovery Method	Indicator
Error State	The Linux kernel immediately stops executing	Any self-test failure	Restart of the module	Kernel Panic

Table 24: Error States

In the Error State, the output interface is inhibited, and the module accepts no more inputs or requests (as the module is no longer running).

10.5 Operator Initiation of Self-Tests

All self-tests, with the exception of the continuous health tests, can be invoked on demand by unloading and subsequently re-initializing the module.

11 Life-Cycle Assurance

11.1 Installation, Initialization, and Startup Procedures

The module is distributed as a part of the Red Hat Enterprise Linux 8 (RHEL 8) package in the form of the kernel-4.18.0-553.123.1.el8_10, libkcapi-1.4.0-2.el8, and libkcapi-hmaccalc-1.4.0-2.el8 RPM packages.

The module can achieve FIPS validated configuration by:

- For installation add the fips=1 option to the kernel command line during the system installation. During the software selection stage, do not install any third-party software. More information can be found at [the vendor documentation](#).
- Switching the system into the approved mode the installation. Execute the fips-mode-setup --enable command. Restart the system. More information can be found at [the vendor documentation](#).

In both cases, the Crypto Officer must verify the RHEL 8 system operates in the approved mode by executing the “fips-mode-setup --check” command, which should output “FIPS mode is enabled.”

11.2 Administrator Guidance

After installation of the kernel-4.18.0-553.123.1.el8_10, libkcapi-1.4.0-2.el8, and libkcapi-hmaccalc-1.4.0-2.el8 RPM packages, the Crypto Officer must execute the “cat /proc/sys/crypto/fips_name” command. The Crypto Officer must ensure that the proper name is listed in the output as follows:

Red Hat Enterprise Linux 8 - Kernel Cryptographic API

Then, the Crypto Officer must execute the “cat /proc/sys/crypto/fips_version” and “rpm -q libkcapi” commands. These commands must output the following (one line per output):

*4.18.0-553.123.1.el8_10.x86_64
libkcapi-1.4.0-2.el8.x86_64*

11.3 Non-Administrator Guidance

There is no non-administrator guidance.

11.6 End of Life

As the module does not persistently store SSPs, secure sanitization of the module consists of unloading the module. This will zeroize all SSPs in volatile memory. Then, if desired, the kernel-4.18.0-553.123.1.el8_10, libkcapi-1.4.0-2.el8, and libkcapi-hmaccalc-1.4.0-2.el8 RPM packages can be uninstalled from the RHEL 8 system.

12 Mitigation of Other Attacks

The module does not offer mitigation of other attacks and therefore this section is not applicable.

Appendix A. Glossary and Abbreviations

AES	Advanced Encryption Standard
API	Application Programming Interface
CAST	Cryptographic Algorithm Self-Test
CAVP	Cryptographic Algorithm Validation Program
CBC	Cipher Block Chaining
CCM	Counter with Cipher Block Chaining-Message Authentication Code
CFB	Cipher Feedback
CMAC	Cipher-based Message Authentication Code
CMVP	Cryptographic Module Validation Program
CSP	Critical Security Parameter
CTR	Counter
DRBG	Deterministic Random Bit Generator
ECB	Electronic Code Book
FIPS	Federal Information Processing Standards
GCM	Galois Counter Mode
GMAC	Galois Counter Mode Message Authentication Code
HMAC	Keyed-Hash Message Authentication Code
IPsec	Internet Protocol Security
KAT	Known Answer Test
MAC	Message Authentication Code
NIST	National Institute of Science and Technology
PAA	Processor Algorithm Acceleration
PKCS	Public-Key Cryptography Standards
RSA	Rivest, Shamir, Addleman
SHA	Secure Hash Algorithm
SSP	Sensitive Security Parameter
XTS	XEX-based Tweaked-codebook mode with cipher text Stealing

Appendix B. References

FIPS 140-3	FIPS PUB 140-3 - Security Requirements For Cryptographic Modules March 2019 https://doi.org/10.6028/NIST.FIPS.140-3
FIPS 140-3 IG	Implementation Guidance for FIPS PUB 140-3 and the Cryptographic Module Validation Program 18 April 2025 https://csrc.nist.gov/Projects/cryptographic-module-validation-program/fips-140-3-ig-announcements
FIPS 180-4	Secure Hash Standard (SHS) March 2012 https://doi.org/10.6028/NIST.FIPS.180-4
FIPS 186-5	Digital Signature Standard (DSS) February 2023 https://doi.org/10.6028/NIST.FIPS.186-5
FIPS 197	Advanced Encryption Standard May 2023 https://doi.org/10.6028/NIST.FIPS.197-upd1
FIPS 198-1	The Keyed Hash Message Authentication Code (HMAC) July 2008 https://doi.org/10.6028/NIST.FIPS.198-1
FIPS 202	SHA-3 Standard: Permutation-Based Hash and Extendable-Output Functions August 2015 https://doi.org/10.6028/NIST.FIPS.202
PKCS#1	Public Key Cryptography Standards (PKCS) #1: RSA Cryptography Specifications Version 2.1 February 2003 https://www.ietf.org/rfc/rfc3447.txt
RFC 4106	The Use of Galois/Counter Mode (GCM) in IPsec Encapsulating Security Payload (ESP) June 2005 https://www.rfc-editor.org/rfc/rfc4106.txt
RFC 7296	Internet Key Exchange Protocol Version 2 (IKEv2) June 2005 https://www.rfc-editor.org/rfc/rfc7296.txt
SP 800-38A	Recommendation for Block Cipher Modes of Operation Methods and Techniques December 2001 https://doi.org/10.6028/NIST.SP.800-38A

SP 800-38B	Recommendation for Block Cipher Modes of Operation: The CMAC Mode for Authentication May 2005 https://doi.org/10.6028/NIST.SP.800-38B
SP 800-38C	Recommendation for Block Cipher Modes of Operation: the CCM Mode for Authentication and Confidentiality May 2004 https://doi.org/10.6028/NIST.SP.800-38C
SP 800-38D	Recommendation for Block Cipher Modes of Operation: Galois/Counter Mode (GCM) and GMAC November 2007 https://doi.org/10.6028/NIST.SP.800-38D
SP 800-38E	Recommendation for Block Cipher Modes of Operation: The XTS AES Mode for Confidentiality on Storage Devices January 2010 https://doi.org/10.6028/NIST.SP.800-38E
SP 800-38F	Recommendation for Block Cipher Modes of Operation: Methods for Key Wrapping December 2012 https://doi.org/10.6028/NIST.SP.800-38F
SP 800-90A Rev. 1	Recommendation for Random Number Generation Using Deterministic Random Bit Generators June 2015 https://doi.org/10.6028/NIST.SP.800-90Ar1
SP 800-140B Rev. 1	Cryptographic Module Validation Program (CMVP) Security Policy Requirements November 2023 https://doi.org/10.6028/NIST.SP.800-140Br1