



SUSE LLC

SUSE Linux Enterprise NSS Cryptographic Module

FIPS 140-3 Non-Proprietary Security Policy

Prepared by:

atsec information security corporation
4516 Seton Center Pkwy, Suite 250
Austin, TX 78759
www.atsec.com

Document version: 1.2
Last update: 2026-08-25

Table of Contents

1	General	5
1.1	Overview	5
1.2	Security Levels	5
2	Cryptographic Module Specification	6
2.1	Description	6
2.2	Tested and Vendor Affirmed Module Version and Identification	7
2.3	Excluded Components	11
2.4	Modes of Operation	11
2.5	Algorithms.....	11
2.6	Security Function Implementations.....	15
2.7	Algorithm Specific Information	19
2.7.1	AES-GCM IV	19
2.7.2	Key Derivation using SP 800-132 PBKDF2.....	20
2.7.3	SP 800-56A Rev. 3 Assurances.....	20
2.7.4	RSA Approved Modulus Size	21
2.7.5	Legacy Use	21
2.8	RBG and Entropy	21
2.9	Key Generation	22
2.10	Key Establishment	22
2.11	Industry Protocols	22
3	Cryptographic Module Interfaces	23
3.1	Ports and Interfaces	23
4	Roles, Services, and Authentication.....	24
4.1	Authentication Methods.....	24
4.2	Roles.....	24
4.3	Approved Services.....	24
4.4	Non-Approved Services	32
4.5	External Software/Firmware Loaded	33
5	Software/Firmware Security	34
5.1	Integrity Techniques.....	34
5.2	Initiate on Demand	34

6	Operational Environment	35
6.1	Operational Environment Type and Requirements	35
6.2	Configuration Settings and Restrictions	35
7	Physical Security	36
8	Non-Invasive Security	37
9	Sensitive Security Parameters Management	38
9.1	Storage Areas	38
9.2	SSP Input-Output Methods	38
9.3	SSP Zeroization Methods.....	39
9.4	SSPs.....	39
9.5	Transitions.....	48
10	Self-Tests	49
10.1	Pre-Operational Self-Tests	49
10.2	Conditional Self-Tests	49
10.3	Periodic Self-Test Information.....	58
10.4	Error States.....	62
10.5	Operator Initiation of Self-Tests	63
11	Life-Cycle Assurance	64
11.1	Installation, Initialization, and Startup Procedures	64
11.2	Administrator Guidance	64
11.3	Non-Administrator Guidance	64
11.4	End of Life	64
12	Mitigation of Other Attacks.....	65
12.1	Attack List	65
Appendix A.	Glossary and abbreviations.....	66
Appendix B.	References.....	68

List of Tables

Table 1: Security Levels.....	5
Table 2: Tested Module Identification – Software, Firmware, Hybrid (Executable Code Sets)	8
Table 3: Tested Operational Environments - Software, Firmware, Hybrid	8
Table 4: Vendor-Affirmed Operational Environments - Software, Firmware, Hybrid	10
Table 5: Modes List and Description	11
Table 6: Approved Algorithms.....	14
Table 7: Vendor-Affirmed Algorithms.....	14
Table 8: Non-Approved, Allowed Algorithms with No Security Claimed.....	14
Table 9: Non-Approved, Not Allowed Algorithms.....	15
Table 10: Security Function Implementations.....	19
Table 11: Entropy Certificates	21
Table 12: Entropy Sources.....	21
Table 13: Ports and Interfaces.....	23
Table 14: Roles.....	24
Table 15: Approved Services	31
Table 16: Non-Approved Services	33
Table 17: Storage Areas	38
Table 18: SSP Input-Output Methods	38
Table 19: SSP Zeroization Methods.....	39
Table 20: SSP Table 1	44
Table 21: SSP Table 2	48
Table 22: Pre-Operational Self-Tests.....	49
Table 23: Conditional Self-Tests	58
Table 24: Pre-Operational Periodic Information	59
Table 25: Conditional Periodic Information	62
Table 26: Error States	62

List of Figures

Figure 1: Block Diagram.....	7
------------------------------	---

1 General

1.1 Overview

This document is the non-proprietary FIPS 140-3 Security Policy for version 3.2 of the SUSE Linux Enterprise NSS Cryptographic Module. It contains the security rules under which the module must operate and describes how this module meets the requirements as specified in FIPS PUB 140-3 (Federal Information Processing Standards Publication 140-3) for an overall Security Level 1 module.

This Non-Proprietary Security Policy may be reproduced and distributed, but only whole and intact and including this notice. Other documentation is proprietary to their authors.

1.2 Security Levels

Section	Title	Security Level
1	General	1
2	Cryptographic module specification	1
3	Cryptographic module interfaces	1
4	Roles, services, and authentication	1
5	Software/Firmware security	1
6	Operational environment	1
7	Physical security	N/A
8	Non-invasive security	N/A
9	Sensitive security parameter management	1
10	Self-tests	1
11	Life-cycle assurance	1
12	Mitigation of other attacks	1
	Overall Level	1

Table 1: Security Levels

1.3 Additional Information

In preparing the Security Policy document, the laboratory formatted the vendor-supplied documentation for consolidation without altering the technical statements therein contained. The further refining of the Security Policy document was conducted iteratively throughout the conformance testing, wherein the Security Policy was submitted to the vendor, who would then edit, modify, and add technical contents. The vendor would also supply additional documentation, which the laboratory formatted into the existing Security Policy, and resubmitted to the vendor for their final editing.

2 Cryptographic Module Specification

2.1 Description

Purpose and Use:

The SUSE Linux Enterprise NSS Cryptographic Module (hereafter referred to as “the module”) is defined as a software module in a multi-chip standalone embodiment. It provides a C language application program interface (API) designed to support cross-platform development of security-enabled client and server applications. Applications built with NSS can support TLS, IKE, PKCS#5, PKCS#7, PKCS#11, PKCS#12, S/MIME, X.509 v3 certificates, and other security standards supporting FIPS 140-3 validated cryptographic algorithms. It combines a vertical stack of Linux components intended to limit the external interface each separate component may provide.

Module Type: Software

Module Embodiment: Multi-Chip Standalone

Cryptographic Boundary:

The cryptographic boundary consists only of the libsoftokn3.so and libfreeblpriv3.so libraries along with their associated integrity check values as listed in Section 2.2. If any other NSS API outside of these two libraries is invoked, the user is not interacting with the module specified in this Security Policy.

Tested Operational Environment’s Physical Perimeter (TOEPP):

The TOEPP of the module is defined as the general-purpose computer on which the module is installed.

The entropy source and the PAA/PAI provided by the processor are located within the module’s physical perimeter and outside of the module’s cryptographic boundary.

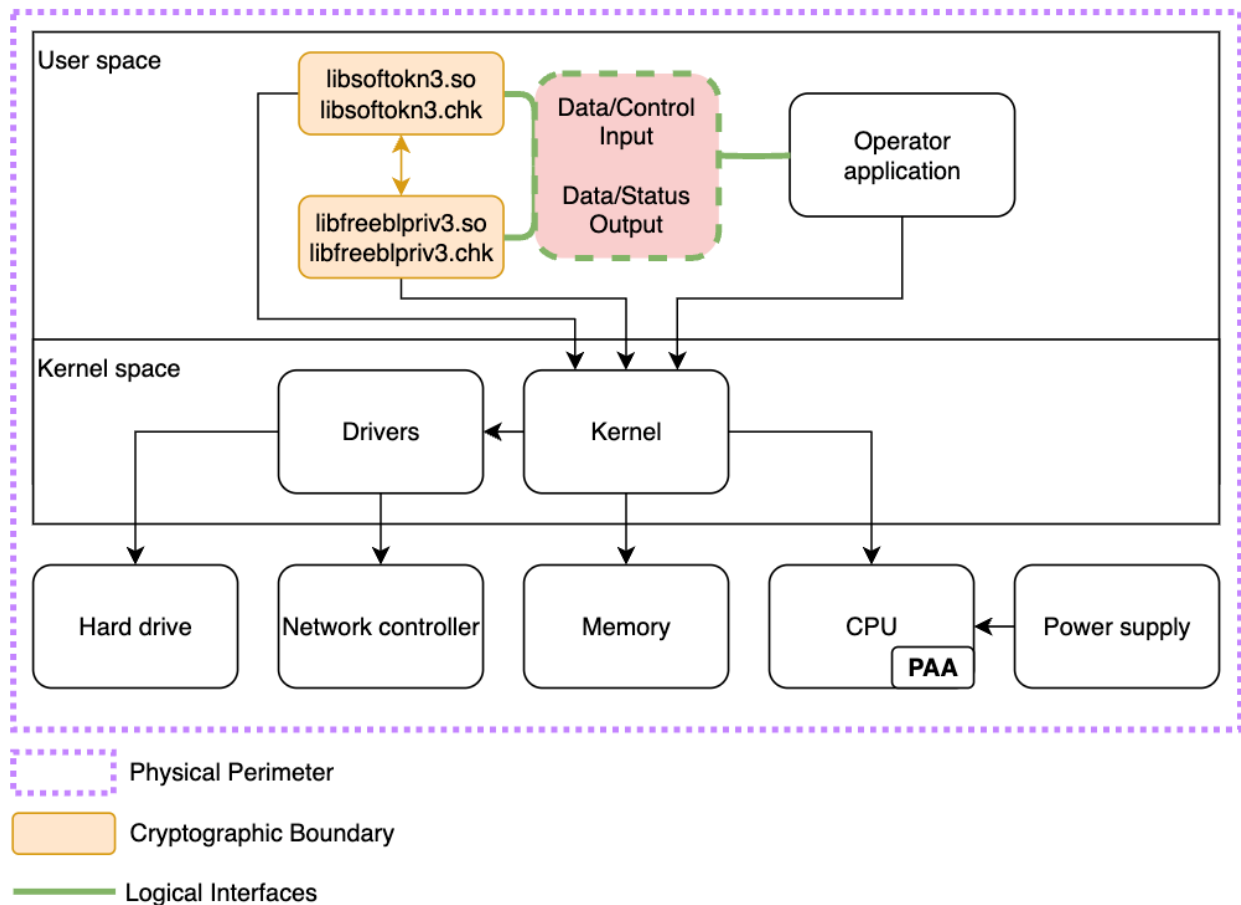


Figure 1: Block Diagram

2.2 Tested and Vendor Affirmed Module Version and Identification

Tested Module Identification – Hardware:

N/A for this module.

Tested Module Identification – Software, Firmware, Hybrid (Executable Code Sets):

Package or File Name	Software/ Firmware Version	Features	Integrity Test
libsoftokn3.so, libfreeblpriv3.so on AMD EPYC(TM) 7343 or Intel® Xeon® Gold 5416S	3.2	N/A	HMAC-SHA-256
libsoftokn3.so, libfreeblpriv3.so on Ampere® Altra® Q80- 30	3.2	N/A	HMAC-SHA-256

Package or File Name	Software/ Firmware Version	Features	Integrity Test
libsoftkn3.so, libfreeblpriv3.so on IBM® Telum(TM)	3.2	N/A	HMAC-SHA-256

Table 2: Tested Module Identification – Software, Firmware, Hybrid (Executable Code Sets)

Tested Module Identification – Hybrid Disjoint Hardware:

N/A for this module.

Tested Operational Environments - Software, Firmware, Hybrid:

Operating System	Hardware Platform	Processors	PAA/PAI	Hypervisor or Host OS	Version(s)
SUSE Linux Enterprise Server 15 SP6	SuperMicro SuperChassis 825BTQC-R1K23LPB and Motherboard H12DSi-NT6	AMD EPYC(TM) 7343	Yes	N/A	3.2
SUSE Linux Enterprise Server 15 SP6	SuperMicro SuperChassis 825BTQC-R1K23LPB and Motherboard H12DSi-NT6	AMD EPYC(TM) 7343	No	N/A	3.2
SUSE Linux Enterprise Server 15 SP6	GIGABYTE R152-P30	Ampere® Altra® Q80-30	Yes	N/A	3.2
SUSE Linux Enterprise Server 15 SP6	GIGABYTE R152-P30	Ampere® Altra® Q80-30	No	N/A	3.2
SUSE Linux Enterprise Server 15 SP6	IBM z16 A01	IBM® Telum(TM)	Yes	N/A	3.2
SUSE Linux Enterprise Server 15 SP6	IBM z16 A01	IBM® Telum(TM)	No	N/A	3.2
SUSE Linux Enterprise Server 15 SP6	ASUS RS700-E11-RS4U	Intel® Xeon® Gold 5416S	Yes	N/A	3.2
SUSE Linux Enterprise Server 15 SP6	ASUS RS700-E11-RS4U	Intel® Xeon® Gold 5416S	No	N/A	3.2

Table 3: Tested Operational Environments - Software, Firmware, Hybrid

Vendor-Affirmed Operational Environments - Software, Firmware, Hybrid:

Operating System	Hardware Platform
SUSE Linux Enterprise Server for SAP 15SP6	ASUS RS700-E11-RS4U on Intel® Xeon® Gold 5416S
SUSE Linux Enterprise Server for SAP 15SP6	SuperMicro SuperChassis 825BTQCR1K23LPB and Motherboard H12DSi-NT6 on AMD EPYC(TM) 7343
SUSE Linux Enterprise Desktop 15SP6	ASUS RS700-E11-RS4U on Intel® Xeon® Gold 5416S
SUSE Linux Enterprise Desktop 15SP6	SuperMicro SuperChassis 825BTQCR1K23LPB and Motherboard H12DSi-NT6 on AMD EPYC(TM) 7343
SUSE Linux Enterprise Base Container Image 15SP6	ASUS RS700-E11-RS4U on Intel® Xeon® Gold 5416S
SUSE Linux Enterprise Base Container Image 15SP6	SuperMicro SuperChassis 825BTQCR1K23LPB and Motherboard H12DSi-NT6 on AMD EPYC(TM) 7343
SUSE Linux Enterprise Base Container Image 15SP6	GIGABYTE R152-P30 on Ampere® Altra® Q80-30
SUSE Linux Enterprise Base Container Image 15SP6	IBM z16 A01 on IBM® Telum(TM)
SUSE Linux Enterprise Server 15SP6	IBM LinuxONE III Model LT1 on z15
SUSE Linux Enterprise Server Real Time 15SP6	QEMU VM on AMD EPYC(TM) 7773X
SUSE Linux Enterprise Desktop 15SP6	QEMU VM on AMD EPYC(TM) 7773X
SUSE Linux Enterprise Desktop 15SP6	QEMU VM on Intel® i7-1195G7
SUSE Linux Enterprise Base Container Image 15SP6	QEMU VM on Intel® Xeon® Gold 6338
SUSE Linux Enterprise Base Container Image 15SP6	QEMU VM on Ampere® Altra® Q80-30
SUSE Linux Enterprise Base Container Image 15SP6	IBM LinuxONE III Model LT1 QEMU VM on z15
SUSE Linux Enterprise Server 15SP6	IBM LinuxONE III Model LT1 QEMU VM on z15
SUSE Linux Enterprise Server 15SP6	QEMU VM on AMD EPYC(TM) 7773X
SUSE Linux Enterprise Server 15SP6	QEMU VM on Ampere® Altra® Q80-30

Operating System	Hardware Platform
SUSE Linux Enterprise Server 15SP6	QEMU VM on Intel® Xeon® Gold 6338
SUSE Linux Enterprise Server for SAP 15SP6	QEMU VM on AMD EPYC(TM) 7773X
SUSE Linux Enterprise Server for SAP 15SP7	ASUS RS700-E11-RS4U on Intel® Xeon® Gold 5416S
SUSE Linux Enterprise Server for SAP 15SP7	SuperMicro SuperChassis 825BTQCR1K23LPB and Motherboard H12DSi-NT6 on AMD EPYC(TM) 7343
SUSE Linux Enterprise Desktop 15SP7	ASUS RS700-E11-RS4U on Intel® Xeon® Gold 5416S
SUSE Linux Enterprise Desktop 15SP7	SuperMicro SuperChassis 825BTQCR1K23LPB and Motherboard H12DSi-NT6 on AMD EPYC(TM) 7343
SUSE Linux Enterprise Base Container Image 15SP7	ASUS RS700-E11-RS4U on Intel® Xeon® Gold 5416S
SUSE Linux Enterprise Base Container Image 15SP7	SuperMicro SuperChassis 825BTQCR1K23LPB and Motherboard H12DSi-NT6 on AMD EPYC(TM) 7343
SUSE Linux Enterprise Base Container Image 15SP7	GIGABYTE R152-P30 on Ampere® Altra® Q80-30
SUSE Linux Enterprise Base Container Image 15SP7	IBM z16 A01 on IBM® Telum(TM)
SUSE Linux Enterprise Base Container Image 15SP7	IBM LinuxONE III Model LT1 on z15
SUSE Linux Enterprise Server 15SP7	IBM LinuxONE III Model LT1 on z15
SUSE Linux Enterprise Server 15SP7	IBM z16 A01 on IBM® Telum(TM)
SUSE Linux Enterprise Server 15SP7	ASUS RS700-E11-RS4U on Intel® Xeon® Gold 5416S
SUSE Linux Enterprise Server 15SP7	SuperMicro SuperChassis 825BTQCR1K23LPB and Motherboard H12DSi-NT6 on AMD EPYC(TM) 7343
SUSE Linux Enterprise Server 15SP7	GIGABYTE R152-P30 on Ampere® Altra® Q80-30

Table 4: Vendor-Affirmed Operational Environments - Software, Firmware, Hybrid

The module is considered to maintain compliance with the FIPS 140-3 validation for SUSE products when operating on any general-purpose platform/processor that supports the SUSE Linux Enterprise Server operating system per the vendor affirmation from SUSE based on the allowance FIPS 140-3 management manual [FIPS140-3_MM] section 7.9.1 bullet 1 a i).

CMVP makes no statement as to the correct operation of the module or the security strengths of the generated keys when so ported if the specific operational environment is not listed on the validation certificate.

2.3 Excluded Components

There are no components within the cryptographic boundary excluded from the FIPS 140-3 requirements.

2.4 Modes of Operation

Modes List and Description:

Mode Name	Description	Type	Status Indicator
Approved	Automatically entered whenever an approved service is requested.	Approved	Equivalent to the indicator of the requested service ("CKR_OK" for approved DRBG service and NSC_NSSGetFIPSSStatus returns CKS_NSS_FIPS_OK (1) for all other approved services).
Non-Approved	Automatically entered whenever a non-approved service is requested.	Non-Approved	Equivalent to the indicator of the requested service (DRBG service does not return CKR_OK, NSC_NSSGetFIPSSStatus does not return CKS_NSS_FIPS_OK (1) for all other services).

Table 5: Modes List and Description

After passing all pre-operational self-tests and cryptographic algorithm self-tests executed on start-up, the module automatically transitions to the approved mode. No operator intervention is required to reach this point.

Mode Change Instructions and Status:

The module automatically switches between the approved and non-approved modes depending on the services requested by the operator. The status indicator of the mode of operation is equivalent to the indicator of the service that was requested.

2.5 Algorithms

Approved Algorithms:

Algorithm	CAVP Cert	Properties	Reference
AES-CBC	A6152, A6154, A6157	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38A
AES-CBC-CS1	A6152, A6154, A6157	Direction - decrypt, encrypt Key Length - 128, 192, 256	SP 800-38A
AES-CMAC	A6152, A6154, A6157	Direction - Generation Key Length - 128, 192, 256	SP 800-38B
AES-CTR	A6152, A6154, A6157	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38A

Algorithm	CAVP Cert	Properties	Reference
AES-ECB	A6152, A6154, A6157	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38A
AES-GCM	A6152, A6154, A6155, A6157, A6158	Direction - Decrypt, Encrypt IV Generation - External, Internal Key Length - 128, 192, 256 IV Generation Mode - 8.2.1, 8.2.2	SP 800-38D
AES-KW	A6152, A6154, A6157	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38F
AES-KWP	A6152, A6154, A6157	Direction - Decrypt, Encrypt Key Length - 128, 192, 256	SP 800-38F
ECDSA KeyGen (FIPS186-5)	A6152	Curve - P-256, P-384, P-521 Secret Generation Mode - testing candidates	FIPS 186-5
ECDSA SigGen (FIPS186-5)	A6152	Curve - P-256, P-384, P-521 Hash Algorithm - SHA2-224, SHA2-256, SHA2-384, SHA2-512 Component - No	FIPS 186-5
ECDSA SigVer (FIPS186-5)	A6152	Curve - P-256, P-384, P-521 Hash Algorithm - SHA2-224, SHA2-256, SHA2-384, SHA2-512	FIPS 186-5
Hash DRBG	A6152	Prediction Resistance - No, Yes Mode - SHA2-256	SP 800-90A Rev. 1
HMAC-SHA2-224	A6152, A6156, A6159	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA2-256	A6152, A6156, A6159	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA2-384	A6152, A6156, A6159	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
HMAC-SHA2-512	A6152, A6156, A6159	Key Length - Key Length: 112-524288 Increment 8	FIPS 198-1
KAS-ECC-SSC Sp800-56Ar3	A6152	Domain Parameter Generation Methods - P-256, P-384, P-521 Scheme - ephemeralUnified - KAS Role - initiator, responder	SP 800-56A Rev. 3
KAS-FFC-SSC Sp800-56Ar3	A6152	Domain Parameter Generation Methods - ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192, MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192 Scheme -	SP 800-56A Rev. 3

Algorithm	CAVP Cert	Properties	Reference
		dhEphem - KAS Role - initiator, responder	
KDF IKEv1 (CVL)	A6153	Authentication Method - Digital Signature, Pre-shared Key Diffie-Hellman Shared Secret Length - Diffie-Hellman Shared Secret Length: 224, 2048, 8192 Hash Algorithm - SHA-1, SHA2-224, SHA2-256, SHA2-384, SHA2-512 Preshared Key Length - Preshared Key Length: 8, 384, 768, 8192	SP 800-135 Rev. 1
KDF IKEv2 (CVL)	A6153	Diffie-Hellman Shared Secret Length - Diffie-Hellman Shared Secret Length: 224, 2048, 8192 Derived Keying Material Length - Derived Keying Material Length: 1056, 3072 Hash Algorithm - SHA-1, SHA2-224, SHA2-256, SHA2-384, SHA2-512	SP 800-135 Rev. 1
KDF SP800-108	A6152	KDF Mode - Counter, Double Pipeline Iteration, Feedback Supported Lengths - Supported Lengths: 112-4096 Increment 8	SP 800-108 Rev. 1
KDF TLS (CVL)	A6152	TLS Version - v1.0/1.1	SP 800-135 Rev. 1
PBKDF	A6152	Iteration Count - Iteration Count: 1000-10000 Increment 1 Password Length - Password Length: 8-128 Increment 1	SP 800-132
RSA KeyGen (FIPS186-5)	A6152	Key Generation Mode - probable Modulo - 2048, 3072, 4096, 6144, 8192 Primality Tests - 2pow100 Private Key Format - standard	FIPS 186-5
RSA SigGen (FIPS186-5)	A6152	Modulo - 2048, 3072, 4096 Signature Type - pkcs1v1.5, pss	FIPS 186-5
RSA SigVer (FIPS186-2)	A6152	Signature Type - PKCS 1.5, PKCSPSS Modulo - 1536	FIPS 186-4
RSA SigVer (FIPS186-4)	A6152	Signature Type - PKCS 1.5, PKCSPSS Modulo - 1024	FIPS 186-4
RSA SigVer (FIPS186-5)	A6152	Modulo - 2048, 3072, 4096 Signature Type - pkcs1v1.5, pss	FIPS 186-5
Safe Primes Key Generation	A6152	Safe Prime Groups - ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192, MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192	SP 800-56A Rev. 3

Algorithm	CAVP Cert	Properties	Reference
SHA2-224	A6152, A6156, A6159	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2, 4, 8	FIPS 180-4
SHA2-256	A6152, A6156, A6159	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2, 4, 8	FIPS 180-4
SHA2-384	A6152, A6156, A6159	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2, 4, 8	FIPS 180-4
SHA2-512	A6152, A6156, A6159	Message Length - Message Length: 0-65536 Increment 8 Large Message Sizes - 1, 2, 4, 8	FIPS 180-4
TLS v1.2 KDF RFC7627 (CVL)	A6152	Hash Algorithm - SHA2-256, SHA2-384, SHA2-512	SP 800-135 Rev. 1

Table 6: Approved Algorithms

Vendor-Affirmed Algorithms:

Name	Properties	Implementation	Reference
Symmetric Cryptographic Key Generation (CKG)	Key type:Symmetric	N/A	SP 800-133 Rev. 2, section 4, example 1, and section 6.1
Asymmetric Cryptographic Key Generation (CKG)	Key type:Asymmetric	N/A	SP 800-133 Rev. 2, section 4, example 1

Table 7: Vendor-Affirmed Algorithms

Non-Approved, Allowed Algorithms:

N/A for this module.

Non-Approved, Allowed Algorithms with No Security Claimed:

Name	Caveat	Use and Function
MD5	Only allowed as the PRF in TLSv1.0 and v1.1 per IG 2.4.A	Message digest used in TLSv1.0/v1.1 KDF only

Table 8: Non-Approved, Allowed Algorithms with No Security Claimed

Non-Approved, Not Allowed Algorithms:

Name	Use and Function
MD2, MD5, SHA-1	Message digest
RC4, DES, Triple-DES, CDMF, Camellia, ChaCha20(-Poly1305)	Encryption, Decryption
AES GCM (external IV)	Encryption
CBC-MAC, AES XCBC-MAC, AES XCBC-MAC-96, HMAC (MD2, MD5, SHA-1), HMAC (< 112-bit keys), HMAC/SSLv3 MAC (constant-time implementation)	Message authentication

Name	Use and Function
KDF using only MD2, MD5, SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, DES, Triple-DES, AES, Camellia	Key derivation
ANS X9.63 KDF, SSL 3 PRF, TLS KDF without extended master secret	Key derivation
KBKDF, HKDF, TLS 1.0/1.1 KDF, TLS 1.2 KDF, IKEv1 PRF and IKEv2 PRF with < 112-bit keys	Key derivation
KBKDF, IKEv1 PRF, and IKEv2 PRF (MD2, MD5)	Key derivation
PBKDF2 with parameters (password, salt, iterations) not complying with section 2.7.2 or < 112-bit keys, PKCS#5 PBE, PKCS#12 PBE	Password-based key derivation
J-PAKE, KAS-FFC-SSC with FIPS 186-type groups, X25519	Shared secret computation
DSA, RSA (primitive), RSA (PKCS#1 v1.5 or PSS with MD2, MD5, SHA-1), ECDSA (component), ECDSA (SHA-1)	Signature generation, Signature verification
RSA (< 2048-bit keys)	Signature generation
RSA (< 1024-bit keys)	Signature verification
RSA (data encryption / decryption)	Asymmetric encryption, Asymmetric decryption
DSA	Parameter generation, Parameter verification
DSA, Diffie Hellman (FIPS 186-type groups), RSA (< 2048 bits), RSA (> 4096 bits), Ed25519, X25519	Key pair generation
Symmetric key generation (< 112 bits)	Secret key generation

Table 9: Non-Approved, Not Allowed Algorithms

2.6 Security Function Implementations

Name	Type	Description	Properties	Algorithms
Encryption with AES	BC-UnAuth	Encryption using AES		AES-CBC: (A6152, A6154, A6157) AES-CBC-CS1: (A6152, A6154, A6157) AES-CTR: (A6152, A6154, A6157) AES-ECB: (A6152, A6154, A6157)
Decryption with AES	BC-UnAuth	Decryption using AES		AES-CBC: (A6152, A6154, A6157) AES-CBC-CS1: (A6152, A6154, A6157)

Name	Type	Description	Properties	Algorithms
				AES-CTR: (A6152, A6154, A6157) AES-ECB: (A6152, A6154, A6157)
Authenticated Encryption with AES	BC-Auth	Authenticated encryption using AES		AES-KW: (A6152, A6154, A6157) AES-KWP: (A6152, A6154, A6157) AES-GCM: (A6152, A6154, A6155, A6157, A6158)
Authenticated Decryption with AES	BC-Auth	Authenticated decryption using AES		AES-KW: (A6152, A6154, A6157) AES-KWP: (A6152, A6154, A6157) AES-GCM: (A6152, A6154, A6155, A6157, A6158)
Key Derivation with PBKDF2	PBKDF	Key derivation using PBKDF2		PBKDF: (A6152)
Key Derivation with KBKDF	KBKDF	Key derivation using KBKDF		KDF SP800-108: (A6152)
Key Derivation with TLS KDF	KAS-135KDF	Key derivation using TLS 1.0/1.1/1.2 KDF		KDF TLS: (A6152) TLS v1.2 KDF RFC7627: (A6152)
Key Derivation with IKE KDF	KAS-135KDF	Key derivation using IKEv1/IKEv2 KDF		KDF IKEv1: (A6153) KDF IKEv2: (A6153)
Key Wrapping with AES (KTS)	KTS-Wrap	Key wrapping using AES	Standard:SP 800-38D and SP 800-38F IG D.G:approved key wrapping method Key confirmation:no Caveat:Key establishment methodology provides between 128 and 256 bits of security strength	AES-KW: (A6152, A6154, A6157) AES-KWP: (A6152, A6154, A6157)

Name	Type	Description	Properties	Algorithms
Key Unwrapping with AES (KTS)	KTS-Unwrap	Key unwrapping using AES	Standard:SP 800-38D and SP 800-38F IG D.G:approved key unwrapping method Key confirmation:no Caveat:Key establishment methodology provides between 128 and 256 bits of security strength	AES-KW: (A6152, A6154, A6157) AES-KWP: (A6152, A6154, A6157) AES-GCM: (A6152, A6154, A6155, A6157, A6158)
Message Authentication with HMAC	MAC	Message authentication using HMAC		HMAC-SHA2-224: (A6152, A6156, A6159) HMAC-SHA2-256: (A6152, A6156, A6159) HMAC-SHA2-384: (A6152, A6156, A6159) HMAC-SHA2-512: (A6152, A6156, A6159)
Message Authentication with CMAC	MAC	Message authentication using CMAC		AES-CMAC: (A6152, A6154, A6157)
Random Number Generation with Hash_DRBG	DRBG	Random number generation using Hash_DRBG		Hash DRBG: (A6152)
Shared Secret Computation with KAS-ECC-SSC	KAS-SSC	Shared secret computation using KAS-ECC-SSC		KAS-ECC-SSC Sp800-56Ar3: (A6152)
Shared Secret Computation with KAS-FFC-SSC	KAS-SSC	Shared secret computation using KAS-FFC-SSC		KAS-FFC-SSC Sp800-56Ar3: (A6152)
Signature Generation with RSA	DigSig-SigGen	Signature generation using RSA		RSA SigGen (FIPS186-5): (A6152)

Name	Type	Description	Properties	Algorithms
Signature Generation with ECDSA	DigSig-SigGen	Signature generation using ECDSA		ECDSA SigGen (FIPS186-5): (A6152)
Signature Verification with RSA (legacy use)	DigSig-SigVer	Signature verification using RSA using legacy moduli		RSA SigVer (FIPS186-2): (A6152) RSA SigVer (FIPS186-4): (A6152)
Signature Verification with RSA	DigSig-SigVer	Signature verification using RSA		RSA SigVer (FIPS186-5): (A6152)
Signature Verification with ECDSA	DigSig-SigVer	Signature verification using ECDSA		ECDSA SigVer (FIPS186-5): (A6152)
Symmetric Key Generation with Hash_DRBG	CKG	Direct symmetric key generation using Hash_DRBG		Hash DRBG: (A6152) Symmetric Cryptographic Key Generation (CKG): () Key type: Symmetric
Key Pair Generation with RSA	AsymKeyPair-KeyGen CKG	Key pair generation using RSA		RSA KeyGen (FIPS186-5): (A6152) Asymmetric Cryptographic Key Generation (CKG): () Key type: Asymmetric
Key Pair Generation with ECDSA	AsymKeyPair-KeyGen CKG	Key pair generation using ECDSA		ECDSA KeyGen (FIPS186-5): (A6152) Asymmetric Cryptographic Key Generation (CKG): () Key type: Asymmetric

Name	Type	Description	Properties	Algorithms
Key Pair Generation with Safe Primes	AsymKeyPair-KeyGen CKG	Key pair generation using Safe Primes		Safe Primes Key Generation: (A6152) Asymmetric Cryptographic Key Generation (CKG): () Key type: Asymmetric
Message Digest with SHA	SHA	Message digest using SHA		SHA2-224: (A6152, A6156, A6159) SHA2-256: (A6152, A6156, A6159) SHA2-384: (A6152, A6156, A6159) SHA2-512: (A6152, A6156, A6159)

Table 10: Security Function Implementations

2.7 Algorithm Specific Information

2.7.1 AES-GCM IV

The Crypto Officer shall consider the following requirements and restrictions when using the module.

For TLS 1.2, the module offers the AES-GCM implementation and uses the context of Scenario 1 of FIPS 140-3 IG C.H. NSS is compliant with SP 800-52 Rev. 2 Section 3.3.1 and the mechanism for IV generation is compliant with RFC 5288.

The module does not implement the TLS protocol. The module's implementation of AES-GCM is used together with an application that runs outside the module's cryptographic boundary. The design of the TLS protocol implicitly ensures that the counter (the nonce_explicit part of the IV) does not exhaust the maximum number of possible values for a given session key.

In the event the module's power is lost and restored, the consuming application must ensure that a new key for use with the AES-GCM key encryption or decryption under this scenario shall be established.

Alternatively, the Crypto Officer can use the module's API to perform AES-GCM encryption using internal IV generation that complies with Scenario 2 of the IG C.H. These IVs are always at least 96 bits and generated using the approved DRBG internal to the module's boundary.

Additionally, the module offers an internal deterministic IV generation mode compliant with Scenario 3 of FIPS 140-3 IG C.H. The size of the fixed (name) field used by this IV generation mode is at least 32 bits. The module then internally generates a 32 bit or longer deterministic non-repetitive counter. The module explicitly ensures that this counter is monotonically increasing at each invocation of the AES-GCM for the same encryption key, and that this counter does not exhaust all its possible values. The generated GCM IV is at least 96 bits in length.

Finally, for TLS 1.3, the AES-GCM implementation uses the context of Scenario 5 of FIPS 140-3 IG C.H. The protocol that provides this compliance is TLS 1.3, defined in RFC 8446 of August 2018, using the cipher-suites that explicitly select AES-GCM as the encryption/decryption cipher (Appendix B.4 of RFC 8446). The module supports acceptable AES-GCM cipher suites from Section 3.3.1 of SP800-52r2. TLS 1.3 employs separate 64-bit sequence numbers, one for protocol records that are received, and one for protocol records that are sent to a peer. These sequence numbers are set at zero at the beginning of a TLS 1.3 connection and each time when the AES-GCM key is changed. After reading or writing a record, the respective sequence number is incremented by one. The protocol specification determines that the sequence number should not wrap, and if this condition is observed, then the protocol implementation must either trigger a re-key of the session (i.e., a new key for AES-GCM), or terminate the connection.

In case the module's power is lost and then restored, a new key for use with the AES-GCM encryption/decryption shall be established.

2.7.2 Key Derivation using SP 800-132 PBKDF2

The module provides password-based key derivation (PBKDF2), compliant with SP 800-132. The module supports option 1a from Section 5.4 of SP 800-132, in which the Master Key (MK) or a segment of it is used directly as the Data Protection Key (DPK). In accordance to SP 800-132 and FIPS 140-3 IG D.N, the following requirements shall be met:

- Derived keys shall only be used in storage applications. The MK shall not be used for other purposes. The module enforces the length of the MK or DPK to be of 112 bits or more for the service to be approved.
- Passwords or passphrases, used as an input for the PBKDF2, shall not be used as cryptographic keys.
- The minimum length of the password or passphrase accepted by the module is 20 characters. The probability of guessing the value is estimated to be at most $1/62^{20} = 4 \times 10^{-36}$, when the password is a combination of lowercase, uppercase, and numeric characters. If the password solely consists of digits, the probability of guessing the value is estimated to be 10^{-20} . Combined with the minimum iteration count as described below, this provides an acceptable trade-off between user experience and security against brute-force attacks.
- A portion of the salt shall be generated randomly using the SP 800-90A Rev. 1 DRBG provided by the module. The module restricts minimum length to 128 bits.
- The iteration count shall be selected as large as possible, as long as the time required to generate the key using the entered password is acceptable for the users. The module only allows minimum iteration count to be 1000.

2.7.3 SP 800-56A Rev. 3 Assurances

The module provides shared secret computation (KAS-FFC-SSC and KAS-ECC-SSC) compliant with SP800-56Ar3, in accordance with scenario 2 (1) of FIPS 140-3 IG D.F.

To comply with the assurances found in Section 5.6.2 of SP 800-56A Rev. 3, the operator must use the module together with an application that implements the TLS protocol. Additionally, the module's approved Key Pair Generation service (see Section 4.3) must be used to generate ephemeral Diffie-Hellman or EC Diffie-Hellman key pairs, or the key pairs must be obtained from another FIPS-validated module. As part of this service, the module will internally perform the full public key validation of the generated public key.

The module's shared secret computation service will internally perform the full public key validation of the peer public key, complying with Section 5.6.2.2.2 of SP 800-56A Rev. 3.

2.7.4 RSA Approved Modulus Size

As allowed by FIPS 140-3 IG C.F, the module implements approved RSA signature verification with 1024, 1280, 1536 and 1792-bit moduli. The 1024-bit modulus has been CAVP tested for RSA signature verification in compliance with FIPS 186-4, while the 1536-bit modulus has been CAVP tested for RSA signature verification in compliance with FIPS 186-2. The 1280 and 1792-bit modulus are approved for FIPS 186-2 signature verification, but are untested as no CAVP testing is available for these moduli.

For all other approved moduli (namely 2048, 3072, and 4096 bit keys) supported by the module, RSA key pair generation, signature generation, and signature verification are approved and CAVP tested in compliance with FIPS 186-5.

2.7.5 Legacy Use

Digital signature using RSA with 1024, 1280, 1536, 1792-bit moduli is allowed for legacy use only.

These legacy algorithms can only be used on data that was generated prior to the Legacy Date specified in FIPS 140-3 IG C.M.

2.7.6 Key Agreement

The module does not establish SSPs using an approved key agreement scheme (KAS). However, it does offer some or all of the underlying KAS cryptographic functionality to be used by an external operator/application as part of an approved KAS.

2.8 RBG and Entropy

Cert Number	Vendor Name
E200	SUSE LLC

Table 11: Entropy Certificates

Name	Type	Operational Environment	Sample Size	Entropy per Sample	Conditioning Component
SUSE Userspace Standalone CPU Time Jitter RNG	Non-Physical	SUSE Linux Enterprise Server 15 SP6 on AMD EPYC(TM) 7343; SUSE Linux Enterprise Server 15 SP6 on Ampere® Altra® Q80-30; SUSE Linux Enterprise Server 15 SP6 on Intel® Xeon® Gold 5416S; SUSE Linux Enterprise Server 15 SP6 on IBM® Telum(TM)	256 bits	256 bits	SHA3-256 (A5411)

Table 12: Entropy Sources

The module employs a Deterministic Random Bit Generator (DRBG) implementation based on SP 800-90A Rev. 1. This DRBG is used internally by the module (e.g. to generate symmetric keys, seeds for asymmetric key pairs, and random numbers for security functions). It can also be accessed using the specified API functions.

The DRBG implemented is a SHA-256 Hash_DRBG, seeded by the entropy source described in the table above. It does not employ prediction resistance.

The DRBG is instantiated with an 880-bits long entropy input (corresponding to 880 bits of entropy). Additionally, the DRBG is reseeded with a 440-bit long entropy input (corresponding to 440 bits of entropy). Outputs of multiple GetEntropy() calls are concatenated to receive the entropy input length greater than 256 bits. The output is truncated to get the entropy input string which is not a multiple of 256.

The module complies with the Public Use Document for ESV certificate E200 by reading entropy data from the jent_read_entropy() function. The operational environment on the ESV certificate is identical to the operating system described in this document, which implements the entropy source (outside the module's cryptographic boundary). Thus, the module is compliant with scenario 1 (b) of IG 9.3.A. There are no maintenance requirements for the entropy source. There are no maintenance requirements for the entropy source.

2.9 Key Generation

The module implements Cryptographic Key Generation (CKG, vendor affirmed), compliant with SP 800-133r2 as specified in Section 2.6.

When random values are required, they are obtained from the SP 800-90Ar1 approved DRBG, compliant with Section 4 of SP 800-133r2.

Intermediate key generation values are not output from the module and are explicitly zeroized after processing the service.

2.10 Key Establishment

The module implements shared secret computation methods as listed in the Security Function Implementation table in Section 2.6.

2.11 Industry Protocols

For KAS-FFC-SSC, the module supports the use of the safe primes defined in RFC 3526 (IKE) and RFC 7919 (TLS) as listed in Section 2.10. Note that the module only implements key pair generation and verification, and shared secret computation. No other part of the IKE or TLS protocols is implemented (with the exception of the TLS 1.0/1.1 KDF, TLS 1.2 KDF (RFC 7627), IKEv1 KDF, and IKEv2 KDF).

TLS 1.0/1.1 KDF, TLS 1.2 KDF (RFC 7627), IKEv1 KDF, and IKEv2 KDF implementations shall only be used to generate secret keys in the context of the TLS and IKE protocols respectively.

AES-GCM with internal IV generation is offered in the approved mode compliant with TLS 1.2 (RFC 5288) and TLS 1.3 (RFC 8446). This functionality shall only be used in conjunction with the TLS protocol.

3 Cryptographic Module Interfaces

3.1 Ports and Interfaces

Physical Port	Logical Interface(s)	Data That Passes
N/A	Data Input	API input parameters
N/A	Data Output	API output parameters
N/A	Control Input	API function calls, API input parameters for control input
N/A	Status Output	API return codes

Table 13: Ports and Interfaces

The logical interfaces are the APIs through which the applications request services. These logical interfaces are logically separated from each other by the API design. The module does not implement a control output interface.

4 Roles, Services, and Authentication

4.1 Authentication Methods

The module does not support authentication for roles.

4.2 Roles

Name	Type	Operator Type	Authentication Methods
Crypto Officer	Role	CO	None

Table 14: Roles

No support is provided for multiple concurrent operators.

4.3 Approved Services

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
Encryption	Encrypt a plaintext	CKS_NSS_FIPS_O K (1)	AES Key, IV, plaintext	Ciphertext	Encryption with AES	Crypto Officer - AES Key: W,E
Decryption	Decrypt a ciphertext	CKS_NSS_FIPS_O K (1)	AES Key, IV, ciphertext	Plaintext	Decryption with AES	Crypto Officer - AES Key: W,E
Authenticated Encryption	Encrypt a plaintext	CKS_NSS_FIPS_O K (1)	AES Key, IV, plaintext	Ciphertext, MAC tag	Authenticated Encryption with AES	Crypto Officer - AES Key: W,E
Authenticated Decryption	Decrypt a ciphertext	CKS_NSS_FIPS_O K (1)	AES Key, IV, MAC tag, ciphertext	Plaintext or fail	Authenticated Decryption with AES	Crypto Officer - AES Key: W,E
Key Derivation from a KDK	Derive a key from a key-derivation key	CKS_NSS_FIPS_O K (1)	Key-Derivation Key, output length	KBKDF Derived Key	Key Derivation with KBKDF	Crypto Officer - Key-Derivation Key: W,E - KBKDF Derived Key: G,R

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
Key Derivation with IKE KDF	Derive a key from a shared secret using IKE KDF	CKS_NSS_FIPS_O K (1)	Shared secret, output length	IKE Derived Key	Key Derivation with IKE KDF	Crypto Officer - Shared Secret: W,E - IKE Derived Key: G,R
Key Derivation with TLS KDF	Derive a key from a shared secret using TLS KDF	CKS_NSS_FIPS_O K (1)	TLS Pre-Master Secret, output length	TLS Derived Key	Key Derivation with TLS KDF	Crypto Officer - TLS Pre-Master Secret: W,E - TLS Master Secret: G,E,Z - TLS Derived Key: G,R
Password-Based Key Derivation	Derive a key from a password	CKS_NSS_FIPS_O K (1)	Password, salt, iteration count, output length	PBKDF2 Derived Key	Key Derivation with PBKDF2	Crypto Officer - Password: W,E - PBKDF2 Derived Key: G,R
Key Wrapping	Wrap a CSP	CKS_NSS_FIPS_O K (1)	AES Key-Encryption Key, any CSP (other than Password)	Wrapped CSP	Key Wrapping with AES (KTS)	Crypto Officer - AES Key-Encryption Key: W,E - Wrapped CSP: R
Key Unwrapping	Unwrap a CSP	CKS_NSS_FIPS_O K (1)	AES Key-Decryption Key, Wrapped CSP	Any CSP (other than Password)	Key Unwrapping with AES (KTS)	Crypto Officer - AES Key-Decryption Key: W,E - Wrapped CSP: W,E

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
Message Authentication with HMAC	Compute a MAC tag	CKS_NSS_FIPS_O K (1)	Message, HMAC Key	MAC tag	Message Authentication with HMAC	Crypto Officer - HMAC Key: W,E
Message Authentication with CMAC	Compute a MAC tag	CKS_NSS_FIPS_O K (1)	Message, AES Key	MAC tag	Message Authentication with CMAC	Crypto Officer - AES Key: W,E
Message Digest	Compute a message digest	CKS_NSS_FIPS_O K (1)	Message	Digest value	Message Digest with SHA	Crypto Officer
Random Number Generation	Generate random bytes	CKR_OK	Output length	Random bytes	Random Number Generation with Hash_DRBG	Crypto Officer - Entropy Input: W,E,Z - DRBG Seed: G,E,Z - DRBG Internal State (V, C): G,W,E
KAS-FFC-SSC Shared Secret Computation	Compute a shared secret	CKS_NSS_FIPS_O K (1)	FFC Private Key (owner), FFC Public Key (peer)	Shared Secret	Shared Secret Computation with KAS-FFC-SSC	Crypto Officer - FFC Private Key: W,E - FFC Public Key: W,E - Shared Secret: G,R
EC Shared Secret Computation	Compute a shared secret	CKS_NSS_FIPS_O K (1)	EC Private Key (owner), EC Public Key (peer)	Shared Secret	Shared Secret Computation with KAS-ECC-SSC	Crypto Officer - EC Private Key: W,E - EC Public Key: W,E - Shared Secret: G,R

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
Signature Generation with RSA	Generate a signature	CKS_NSS_FIPS_O K (1)	RSA Private Key, message	Signature	Signature Generation with RSA	Crypto Officer - RSA Private Key: W,E
Signature Generation with ECDSA	Generate a signature	CKS_NSS_FIPS_O K (1)	EC Private Key, message	Signature	Signature Generation with ECDSA	Crypto Officer - EC Private Key: W,E
Signature Verification with RSA	Verify a signature	CKS_NSS_FIPS_O K (1)	RSA Public Key, message, signature	Pass/fail	Signature Verification with RSA Signature Verification with RSA (legacy use)	Crypto Officer - RSA Public Key: W,E
Signature Verification with ECDSA	Verify a signature	CKS_NSS_FIPS_O K (1)	EC Public Key, message, signature	Pass/fail	Signature Verification with ECDSA	Crypto Officer - EC Public Key: W,E
Key Pair Generation with Safe Primes	Generate a key pair	CKS_NSS_FIPS_O K (1)	Group	Module-generated FFC Public Key, Module-generated FFC Private Key	Key Pair Generation with Safe Primes	Crypto Officer - Module-generated FFC Private Key: G,R - Module-generated FFC Public Key: G,R - Intermediate key generation value: G,E,Z
Key Pair Generation with RSA	Generate a key pair	CKS_NSS_FIPS_O K (1)	Modulus size	Module-generated RSA Public Key, Module-	Key Pair Generation with RSA	Crypto Officer - Module-generated RSA Private Key: G,R

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
				generated RSA Private Key		- Module-generated RSA Public Key: G,R - Intermediate key generation value: G,E,Z
Key Pair Generation with ECDSA	Generate a key pair	CKS_NSS_FIPS_O K (1)	Curve	Module-generated EC Public Key, Module-generated EC Private Key	Key Pair Generation with ECDSA	Crypto Officer - Module-generated EC Private Key: G,R - Module-generated EC Public Key: G,R - Intermediate key generation value: G,E,Z
Symmetric Key Generation	Generate a secret key	CKS_NSS_FIPS_O K (1)	Key size	Symmetric Key	Symmetric Key Generation with Hash_DRBG	Crypto Officer - Symmetric Key: G,R
Show Version	Return the module name and version information	None	N/A	Module name and version information	None	Crypto Officer
Show Status	Return the module status	None	N/A	Module status	None	Crypto Officer
Self-Test	Perform the CASTs and	None	N/A	Pass/fail	Message Digest with SHA	Crypto Officer

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
	integrity tests				Message Authentication with HMAC Encryption with AES Decryption with AES Authenticated Encryption with AES Authenticated Decryption with AES Message Authentication with CMAC Key Derivation with KBKDF Key Derivation with TLS KDF Key Derivation with IKE KDF Key Derivation with PBKDF2 Shared Secret Computation with KAS-FFC-SSC Shared Secret Computation with KAS-ECC-SSC Signature Generation with RSA Signature Verification with RSA Signature Generation with ECDSA	

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
					Signature Verification with ECDSA	
Zeroization	Zeroize all SSPs	N/A	Any SSP	None	None	Crypto Officer - AES Key: Z - AES Key-Encryption Key: Z - AES Key-Decryption Key: Z - HMAC Key: Z - Key-Derivation Key: Z - Shared Secret: Z - Password: Z - KBKDF Derived Key: Z - PBKDF2 Derived Key: Z - TLS Pre-Master Secret: Z - TLS Master Secret: Z - TLS Derived Key: Z - IKE Derived Key: Z - Entropy Input: Z - DRBG Seed: Z - DRBG

Name	Description	Indicator	Inputs	Outputs	Security Functions	SSP Access
						Internal State (V, C): Z - FFC Private Key: Z - FFC Public Key: Z - EC Private Key: Z - EC Public Key: Z - RSA Private Key: Z - RSA Public Key: Z - Intermediate key generation value: Z

Table 15: Approved Services

The module provides services to operators that assume the available role. All services are described in detail in the API documentation (manual pages). For the above table, the convention below applies when specifying the access permissions (types) that the service has for each SSP.

- **Generate (G):** The module generates or derives the SSP.
- **Read (R):** The SSP is read from the module (e.g. the SSP is output).
- **Write (W):** The SSP is updated, imported, or written to the module.
- **Execute (E):** The module uses the SSP in performing a cryptographic operation.
- **Zeroize (Z):** The module zeroizes the SSP.

To interact with the module, a calling application must use the FIPS token APIs provided by libsoftkn3.so. The FIPS token API layer can be used to retrieve the approved service indicator for the module. This indicator consists of three independent service indicators:

1. The session indicator, which must be used for all cryptographic services except the key (pair) generation and key derivation services. It can be accessed by invoking the NSC_NSSGetFIPSSStatus function with the CKT_NSS_SESSION_LAST_CHECK parameter. If the output parameter is set to CKS_NSS_FIPS_OK (1), the service was approved.
2. The object indicator, which must be used for the key (pair) generation and key derivation services. It can be accessed by invoking the NSC_NSSGetFIPSSStatus function with the

CKT_NSS_OBJECT_CHECK parameter and the output derived key. If the output parameter is set to CKS_NSS_FIPS_OK (1), the service was approved.

3. The DRBG service indicator, which must be used for the DRBG service. It can be accessed by invoking the C_SeedRandom or C_GenerateRandom functions. If any of these functions returns CKR_OK, the service was approved.

The above-described behavior maps to example scenario 3 of FIPS140-3 IG 2.4.C.

4.4 Non-Approved Services

Name	Description	Algorithms	Role
Message Digest	Compute a message digest	MD2, MD5, SHA-1	CO
Encryption	Encrypt a plaintext	RC4, DES, Triple-DES, CDMF, Camellia, ChaCha20(-Poly1305) AES GCM (external IV)	CO
Decryption	Decrypt a ciphertext	RC4, DES, Triple-DES, CDMF, Camellia, ChaCha20(-Poly1305)	CO
Message Authentication	Compute a MAC tag	CBC-MAC, AES XCBC-MAC, AES XCBC-MAC-96, HMAC (MD2, MD5, SHA-1), HMAC (< 112-bit keys), HMAC/SSLv3 MAC (constant-time implementation)	CO
Key Derivation	Derive a key from a key-derivation key or a shared secret	KDF using only MD2, MD5, SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, DES, Triple-DES, AES, Camellia ANS X9.63 KDF, SSL 3 PRF, TLS KDF without extended master secret KDKDF, HKDF, TLS 1.0/1.1 KDF, TLS 1.2 KDF, IKEv1 PRF and IKEv2 PRF with < 112-bit keys KDKDF, IKEv1 PRF, and IKEv2 PRF (MD2, MD5)	CO
Password-Based Key Derivation	Derive a key from a password	PBKDF2 with parameters (password, salt, iterations) not complying with section 2.7.2 or < 112-bit keys, PKCS#5 PBE, PKCS#12 PBE	CO
Shared Secret Computation	Compute a shared secret	J-PAKE, KAS-FFC-SSC with FIPS 186-type groups, X25519	CO
Signature Generation	Generate a signature	DSA, RSA (primitive), RSA (PKCS#1 v1.5 or PSS with MD2, MD5, SHA-1), ECDSA (component), ECDSA (SHA-1) RSA (< 2048-bit keys)	CO
Signature Verification	Verify a signature	DSA, RSA (primitive), RSA (PKCS#1 v1.5 or PSS with MD2, MD5, SHA-1), ECDSA (component), ECDSA (SHA-1) RSA (< 1024-bit keys)	CO

Name	Description	Algorithms	Role
Asymmetric Encryption	Encrypt a plaintext	RSA (data encryption / decryption)	CO
Asymmetric Decryption	Decrypt a plaintext	RSA (data encryption / decryption)	CO
Parameter Generation	Generate domain parameters	DSA	CO
Parameter Verification	Verify domain parameters	DSA	CO
Key Pair Generation	Generate a key pair	DSA, Diffie Hellman (FIPS 186-type groups), RSA (< 2048 bits), RSA (> 4096 bits), Ed25519, X25519	CO
Secret Key Generation	Generate a secret key	Symmetric key generation (< 112 bits)	CO

Table 16: Non-Approved Services

The table above lists the non-approved services in this module, the algorithms involved, the roles that can request the service, and the respective service indicator. In this table, CO specifies the Crypto Officer role.

4.5 External Software/Firmware Loaded

The module does not load external software or firmware.

5 Software/Firmware Security

5.1 Integrity Techniques

The integrity of the module is verified by comparing, for each software component, the HMAC-SHA2-256 value calculated at run time with the integrity value that were computed at build time and stored in the associated check file (.chk). The module makes use of an HMAC key hard-coded within the module to perform the integrity test. If the integrity test fails, the module enters the Power-On Error state.

The CAST for the HMAC-SHA2-256 algorithm used for the integrity check of the module's components is run before the execution of the integrity check itself.

5.2 Initiate on Demand

Integrity tests are performed as part of the pre-operational self-tests, which are executed when the module is initialized. The integrity tests may be invoked on-demand by unloading and subsequently re-initializing the module, which will perform (among others) the software integrity tests.

6 Operational Environment

6.1 Operational Environment Type and Requirements

Type of Operational Environment: Modifiable

How Requirements are Satisfied:

Any SSPs contained within the module are protected by the process isolation and memory separation mechanisms, and only the module has control over these SSPs.

If properly installed, the operating system provides process isolation and memory protection mechanisms that ensure appropriate separation for memory access among the processes on the system. Each process has control over its own data and uncontrolled access to the data of other processes is prevented.

6.2 Configuration Settings and Restrictions

The module shall be installed as stated in Section 11.

Instrumentation tools like the ptrace system call, gdb and strace, userspace live patching, as well as other tracing mechanisms offered by the Linux environment such as ftrace or systemtap, shall not be used in the operational environment. The use of any of these tools implies that the cryptographic module is running in a non-validated operational environment.

7 Physical Security

The module is comprised of software only and therefore this section is not applicable.

8 Non-Invasive Security

This module does not implement any non-invasive security mechanism and therefore this section is not applicable.

9 Sensitive Security Parameters Management

9.1 Storage Areas

Storage Area Name	Description	Persistence Type
RAM	Temporary storage for SSPs used by the module as part of service execution. The module does not perform persistent storage of SSPs	Dynamic

Table 17: Storage Areas

The module maintains internal separation of the SSPs (including CSPs) in approved and non-approved modes of operation using an internal isFIPS flag for each SSP. This flag indicates whether the SSP can be used in approved or non-approved services.

The module does not perform persistent storage of SSPs.

9.2 SSP Input-Output Methods

Name	From	To	Format Type	Distribution Type	Entry Type	SFI or Algorithm
API input parameters (plaintext)	Calling application within TOEPP	Cryptographic module	Plaintext	Manual	Electronic	
API input parameters (encrypted)	Calling application within TOEPP	Cryptographic module	Encrypted	Manual	Electronic	Key Unwrapping with AES (KTS)
API output parameters (plaintext)	Cryptographic module	Calling application within TOEPP	Plaintext	Manual	Electronic	
API output parameters (encrypted)	Cryptographic module	Calling application within TOEPP	Encrypted	Manual	Electronic	Key Wrapping with AES (KTS)

Table 18: SSP Input-Output Methods

The module only supports SSP entry and output to and from the calling application running on the same operational environment. This corresponds to manual distribution, electronic entry/output (“CM Software to/from App via TOEPP Path”) per FIPS 140-3 IG 9.5.A Table 1.

CSPs (with the exception of passwords) can only be imported to and exported from the module when they are wrapped using an approved security function (e.g. AES KW/KWP or AES-GCM). PSPs can be imported and exported in plaintext. Import and export is performed using API input and output parameters.

9.3 SSP Zeroization Methods

Zeroization Method	Description	Rationale	Operator Initiation
Destroy Object	Destroys the SSP represented by the object	Memory occupied by SSPs is overwritten with zeroes, which renders the SSP values irretrievable. The completion of the zeroization routine indicates that the zeroization procedure succeeded.	By calling the C_DestroyObject function.
Automatic	Automatically zeroized by the module when no longer needed	Memory occupied by SSPs is overwritten with zeroes, which renders the SSP values irretrievable.	N/A
Module Reset	De-allocates the volatile memory used to store SSPs	Volatile memory used by the module is overwritten within nanoseconds when power is removed. Module power off indicates that the zeroization procedure succeeded.	By removing power

Table 19: SSP Zeroization Methods

All data output is inhibited during zeroization.

9.4 SSPs

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
Symmetric Key	Symmetric key generated by the module	112-512 bits - 112-256 bits	Symmetric key - CSP	Symmetric Key Generation with Hash_DRBG		Symmetric Key Generation with Hash_DRBG
AES Key	AES Key used for encryption, decryption, and for message authentication	128, 192, 256 bits - 128, 192, 256 bits	Symmetric key - CSP			Encryption with AES Decryption with AES Authenticated Encryption with AES Authenticated Decryption with AES Message Authentication

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
						n with CMAC
AES Key-Encryption Key	AES key used for wrapping CSPs	128, 192, 256 bits - 128, 192, 256 bits	Symmetric key - CSP			Key Wrapping with AES (KTS)
AES Key-Decryption Key	AES key used for unwrapping CSPs	128, 192, 256 bits - 128, 192, 256 bits	Symmetric key - CSP			Key Unwrapping with AES (KTS)
Wrapped CSP	CSP wrapped through imported/exported AES key wrapping	112-8192 bits - 112-256 bits	Imported/Exported CSP - CSP		Key Wrapping with AES (KTS) Key Unwrapping with AES (KTS)	Key Wrapping with AES (KTS) Key Unwrapping with AES (KTS)
HMAC Key	HMAC key used for message authentication	112-512 bits - 112-256 bits	Symmetric key - CSP			Message Authentication with HMAC
Key-Derivation Key	Symmetric key used to derive symmetric keys	112-4096 bits - 112-256 bits	Symmetric key - CSP			Key Derivation with KBKDF
Shared Secret	Shared secret generated by KAS-ECC-SSC or KAS-FFC-SSC	256-8192 bits - 112-256 bits	Shared secret - CSP		Shared Secret Computation with KAS-FFC-SSC Shared Secret Computation with KAS-ECC-SSC	Key Derivation with TLS KDF Key Derivation with IKE KDF
TLS Pre-Master Secret	Shared secret input to the TLS KDF	112-256 bits - 112-256 bits	Shared secret - CSP		Shared Secret Computation with	Key Derivation with TLS KDF

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
					KAS-FFC-SSC Shared Secret Computatio n with KAS-ECC-SSC	
TLS Master Secret	Master secret derived by the TLS KDF	384 bits - 112-256 bits	Secret - CSP	Key Derivation with TLS KDF		Key Derivation with TLS KDF
Password	Password used to derive symmetric keys	20-128 characters - N/A	Password - CSP			Key Derivation with PBKDF2
KBKDF Derived Key	Symmetric key derived from a key-derivation key	112-4096 bits - 112-256 bits	Symmetric key - CSP	Key Derivation with KBKDF		
PBKDF2 Derived Key	Symmetric key derived from a password	112-4096 bits - 112-256 bits	Symmetric key - CSP	Key Derivation with PBKDF2		
TLS Derived Key	Symmetric key derived from a shared secret using TLS KDF	112-4096 bits - 112-256 bits	Symmetric key - CSP	Key Derivation with TLS KDF		
IKE Derived Key	Symmetric key derived from a shared secret using IKE KDF	112-4096 bits - 112-256 bits	Symmetric key - CSP	Key Derivation with IKE KDF		
Entropy Input	Entropy input used to seed the DRBG	440-880 bits - 440-880 bits	Entropy input - CSP	Random Number Generation with Hash_DRBG		Random Number Generation with Hash_DRBG
DRBG Seed	DRBG seed derived from entropy input	440 bits - 256 bits	Seed - CSP	Random Number Generation with		Random Number Generation

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
				Hash_DRBG		with Hash_DRBG
DRBG Internal State (V, C)	Internal state of the Hash_DRBG	880 bits - 256 bits	Internal state - CSP	Random Number Generation with Hash_DRBG		Random Number Generation with Hash_DRBG
Module-generated FFC Private Key	FFC Private key generated by the module	2048, 3072, 4096, 6144, 7680, 8192 bits - 112, 128, 152, 176, 192, 200 bits	Private key - CSP	Key Pair Generation with Safe Primes		Key Pair Generation with Safe Primes
Module-generated FFC Public Key	FFC Public key generated by the module	2048, 3072, 4096, 6144, 7680, 8192 bits - 112, 128, 152, 176, 192, 200 bits	Public key - PSP	Key Pair Generation with Safe Primes		Key Pair Generation with Safe Primes
FFC Private Key	Private key used for Diffie-Hellman	2048, 3072, 4096, 6144, 7680, 8192 bits - 112, 128, 152, 176, 192, 200 bits	Private key - CSP			Shared Secret Computation with KAS-FFC-SSC
FFC Public Key	Public key used for Diffie-Hellman	2048, 3072, 4096, 6144, 7680,	Public key - PSP			Shared Secret Computation with KAS-FFC-SSC

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
		8192 bits - 112, 128, 152, 176, 192, 200 bits				
Module-generated EC Private Key	EC Private key generated by the module	P-256, P-384, P-521 - 128, 192, 256 bits	Private key - CSP	Key Pair Generation with ECDSA		Key Pair Generation with ECDSA
Module-generated EC Public Key	EC Public key generated by the module	P-256, P-384, P-521 - 128, 192, 256 bits	Public key - PSP	Key Pair Generation with ECDSA		Key Pair Generation with ECDSA
EC Private Key	Private key used for EC Diffie-Hellman and ECDSA	P-256, P-384, P-521 - 128, 192, 256 bits	Private key - CSP			Shared Secret Computation with KAS-ECC-SSC Signature Generation with ECDSA
EC Public Key	Public key used for EC Diffie-Hellman and ECDSA	P-256, P-384, P-521 - 128, 192, 256 bits	Public key - PSP			Shared Secret Computation with KAS-ECC-SSC Signature Verification with ECDSA
Module-generated RSA Private Key	RSA Private key generated by the module	2048, 3072, 4096 bits - 112, 128, 149 bits	Private key - CSP	Key Pair Generation with RSA		Key Pair Generation with RSA
Module-generated RSA Public Key	RSA Public key generated by the module	2048, 3072, 4096 bits - 112, 128, 149 bits	Public key - PSP	Key Pair Generation with RSA		Key Pair Generation with RSA

Name	Description	Size - Strength	Type - Category	Generated By	Established By	Used By
RSA Private Key	Private key used for RSA signature generation	2048, 3072, 4096 bits - 112, 128, 149 bits	Private key - CSP			Signature Generation with RSA
RSA Public Key	Public key used for RSA signature verification	SigVer: 1024, 1280, 1536, 1792, 2048, 3072, 4096 bits - SigVer: 80, 88, 96, 103, 112, 128, 149 bits	Public key - PSP			Signature Verification with RSA Signature Verification with RSA (legacy use)
Intermediate key generation value	Temporary value generated during key generation services	256-8192 bits - 112-256 bits	Intermediate value - CSP	Key Pair Generation with RSA Key Pair Generation with ECDSA Key Pair Generation with Safe Primes		Key Pair Generation with RSA Key Pair Generation with ECDSA Key Pair Generation with Safe Primes

Table 20: SSP Table 1

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
Symmetric Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	
AES Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
AES Key-Encryption Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	
AES Key-Decryption Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	
Wrapped CSP	API input parameters (encrypted) API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	AES Key-Encryption Key:Wrapped by AES Key-Decryption Key:Unwrapped by
HMAC Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	
Key-Derivation Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	KBKDF Derived Key:Derivation Of
Shared Secret	API input parameters (encrypted) API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	FFC Private Key:Derived From FFC Public Key:Derived From EC Private Key:Derived From EC Public Key:Derived From TLS Derived Key:Derivation Of IKE Derived Key:Derivation Of
TLS Pre-Master Secret	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	FFC Private Key:Established by FFC Public Key:Established by EC Private Key:Established by EC Public Key:Established by

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
					TLS Master Secret:Derivation Of
TLS Master Secret		RAM:Plaintext	For the duration of the service	Automatic Module Reset	TLS Pre-Master Secret:Derived From TLS Derived Key:Derivation Of
Password	API input parameters (plaintext)	RAM:Plaintext	For the duration of the service	Destroy Object Module Reset	PBKDF2 Derived Key:Derivation Of
KBKDF Derived Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Key-Derivation Key:Derived From
PBKDF2 Derived Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Password:Derived From
TLS Derived Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	TLS Master Secret:Derived From
IKE Derived Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Shared Secret:Derived From
Entropy Input		RAM:Plaintext	From generation until DRBG Seed is created	Automatic Module Reset	DRBG Seed:Derivation Of
DRBG Seed		RAM:Plaintext	While the DRBG is instantiated	Automatic Module Reset	Entropy Input:Derived From DRBG Internal State (V, C):Generation Of
DRBG Internal State (V, C)		RAM:Plaintext	While the module is operational	Module Reset	DRBG Seed:Generated From
Module-generated FFC Private Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object	Module-generated FFC Public Key:Paired With

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
				Module Reset	Intermediate key generation value:Generated From
Module-generated FFC Public Key	API output parameters (plaintext)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Module-generated FFC Private Key:Paired With Intermediate key generation value:Generated From
FFC Private Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	FFC Public Key:Paired With
FFC Public Key	API input parameters (plaintext)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	FFC Private Key:Paired With
Module-generated EC Private Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Module-generated EC Public Key:Paired With Intermediate key generation value:Generated From
Module-generated EC Public Key	API output parameters (plaintext)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Module-generated EC Private Key:Paired With Intermediate key generation value:Generated From
EC Private Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	EC Public Key:Paired With
EC Public Key	API input parameters (plaintext)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	EC Private Key:Paired With
Module-generated RSA Private Key	API output parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Module-generated RSA Public Key:Paired With Intermediate key

Name	Input - Output	Storage	Storage Duration	Zeroization	Related SSPs
					generation value:Generated From
Module-generated RSA Public Key	API output parameters (plaintext)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	Module-generated RSA Private Key:Paired With Intermediate key generation value:Generated From
RSA Private Key	API input parameters (encrypted)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	RSA Public Key:Paired With
RSA Public Key	API input parameters (plaintext)	RAM:Plaintext	Until explicitly zeroized by operator	Destroy Object Module Reset	RSA Private Key:Paired With
Intermediate key generation value		RAM:Plaintext	For the duration of the service	Automatic	Module-generated FFC Private Key:Generation Of Module-generated FFC Public Key:Generation Of Module-generated EC Private Key:Generation Of Module-generated EC Public Key:Generation Of Module-generated RSA Private Key:Generation Of Module-generated RSA Public Key:Generation Of

Table 21: SSP Table 2

9.5 Transitions

The SHA-1 algorithm as implemented by the module will be non-approved for all purposes, starting January 1, 2031.

Beginning in 2031, keys providing 112 bits of security strength shall no longer be used to apply cryptographic protection and are limited to legacy use for processing, as specified in Table 4 of NIST SP 800-57 Part 1 Rev. 5.

10 Self-Tests

Upon initialization, the module immediately performs all libfreeblpriv3.so cryptographic algorithm self-tests (CASTs) as specified in the Conditional Self-Tests table. These self-tests include the CAST for the HMAC-SHA2-256 algorithm that is used to verify the integrity of the module's shared libraries.

When all those self-tests pass successfully, the module automatically performs the pre-operational integrity test on the libfreeblpriv3.so file using its associated check value.

Then, the module performs the RSA CAST in the libsoftokn3.so library, followed by the pre-operational integrity test on the libsoftokn3.so file using its associated check value.

Finally, all remaining CASTs for the algorithms implemented in libsoftokn3.so are executed (see the Conditional Self-Tests table).

Only if all CASTs and pre-operational integrity tests passed successfully, the module transitions to the operational state. No operator intervention is required to reach this point.

While the module is executing the self-tests, services are not available, and data output (via the data output interface) is inhibited until the tests are successfully completed. If any of the self-tests fails, an error message is returned, and the module transitions to an error state.

10.1 Pre-Operational Self-Tests

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details
HMAC-SHA2-256	256-bit key	Message authentication	SW/FW Integrity	Module becomes operational and services are available for use	Integrity test for libsoftokn3.so and libfreeblpriv3.so

Table 22: Pre-Operational Self-Tests

10.2 Conditional Self-Tests

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
SHA2-224 (A6152)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-224 (A6156)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
SHA2-224 (A6159)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-256 (A6152)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-256 (A6156)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-256 (A6159)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-384 (A6152)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-384 (A6156)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-384 (A6159)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
SHA2-512 (A6152)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-512 (A6156)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
SHA2-512 (A6159)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Message Digest	Module initialization
HMAC-SHA2-224 (A6152)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-224 (A6156)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-224 (A6159)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-256 (A6152)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC-SHA2-256 (A6156)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-256 (A6159)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-384 (A6152)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-384 (A6156)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-384 (A6159)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-512 (A6152)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
HMAC-SHA2-512 (A6156)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
HMAC-SHA2-512 (A6159)	288-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
AES-ECB - Encrypt (A6152)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-ECB - Encrypt (A6154)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-ECB - Encrypt (A6157)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-ECB - Decrypt (A6152)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-ECB - Decrypt (A6154)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-ECB - Decrypt (A6157)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-CBC - Encrypt (A6152)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-CBC - Encrypt (A6154)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-CBC - Encrypt (A6157)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-CBC - Decrypt (A6152)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-CBC - Decrypt (A6154)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-CBC - Decrypt (A6157)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-GCM - Encrypt (A6152)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-GCM - Encrypt (A6154)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-GCM - Encrypt (A6155)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-GCM - Encrypt (A6157)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-GCM - Encrypt (A6158)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Encryption	Module initialization
AES-GCM - Decrypt (A6152)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-GCM - Decrypt (A6154)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-GCM - Decrypt (A6155)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
AES-GCM - Decrypt (A6157)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-GCM - Decrypt (A6158)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Decryption	Module initialization
AES-CMAC (A6152)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
AES-CMAC (A6154)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
AES-CMAC (A6157)	128, 192, 256-bit key	KAT	CAST	Module becomes operational and services are available for use	Message Authentication	Module initialization
KDF SP800-108 (A6152)	HMAC-SHA2-256 in counter mode	KAT	CAST	Module becomes operational and services are available for use	Key Derivation	Module initialization
KDF TLS (A6152)	512-bit message	KAT	CAST	Module becomes operational and services are available for use	Key Derivation	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
TLS v1.2 KDF RFC7627 (A6152)	SHA2-256	KAT	CAST	Module becomes operational and services are available for use	Key Derivation	Module initialization
KDF IKEv2 (A6153)	SHA-1, SHA-256, SHA-384, SHA-512	KAT	CAST	Module becomes operational and services are available for use	Key Derivation	Module initialization
PBKDF (A6152)	SHA2-256 with 5 iterations, 128-bit salt and 14 characters password	KAT	CAST	Module becomes operational and services are available for use	Key Derivation	Module initialization
Hash DRBG (A6152)	SHA-256 without prediction resistance	KAT	CAST	Module becomes operational and services are available for use	Instantiate Generate; Reseed Generate (compliant to SP 800-90A Rev. 1, Section 11.3)	Module initialization
KAS-FFC-SSC Sp800-56Ar3 (A6152)	ffdhe2048	KAT	CAST	Module becomes operational and services are available for use	Shared Secret Computation	Module initialization
KAS-ECC-SSC Sp800-56Ar3 (A6152)	P-256	KAT	CAST	Module becomes operational and services are available for use	Shared Secret Computation	Module initialization
RSA SigGen (FIPS186-5) (A6152)	PKCS#1 v1.5 with SHA2-256, SHA2-384, SHA2-	KAT	CAST	Module becomes operational and services	Signature Generation	Module initialization

Algorithm or Test	Test Properties	Test Method	Test Type	Indicator	Details	Conditions
	512, and 2048-bit key			are available for use		
RSA SigVer (FIPS186-5) (A6152)	PKCS#1 v1.5 with SHA2-256, SHA2-384, SHA2-512, and 2048-bit key	KAT	CAST	Module becomes operational and services are available for use	Signature Verification	Module initialization
ECDSA SigGen (FIPS186-5) (A6152)	SHA2-256 and P-256	KAT	CAST	Module becomes operational and services are available for use	Signature Generation	Module initialization
ECDSA SigVer (FIPS186-5) (A6152)	SHA2-256 and P-256	KAT	CAST	Module becomes operational and services are available for use	Signature Verification	Module initialization
RSA KeyGen (FIPS186-5) (A6152)	PKCS#1 v1.5 with SHA-256	PCT	PCT	Successful key pair generation	Signature Generation and Signature Verification	Key Pair Generation
ECDSA KeyGen (FIPS186-5) - SSC (A6152)	N/A	PCT	PCT	Successful key pair generation	PCT according to section 5.6.2.1.4 of SP 800-56A Rev. 3	Key Pair Generation
ECDSA KeyGen (FIPS186-5) - SigGen/SigVer (A6152)	SHA-256	PCT	PCT	Successful key pair generation	Signature Generation and Signature Verification	Key Pair Generation
Safe Primes Key Generation (A6152)	N/A	PCT	PCT	Successful key pair generation	PCT according to section 5.6.2.1.4 of SP 800-56A Rev. 3	Key Pair Generation

Table 23: Conditional Self-Tests

10.3 Periodic Self-Test Information

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
HMAC-SHA2-256	Message authentication	SW/FW Integrity	On demand	Manually

Table 24: Pre-Operational Periodic Information

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
SHA2-224 (A6152)	KAT	CAST	On demand	Manually
SHA2-224 (A6156)	KAT	CAST	On demand	Manually
SHA2-224 (A6159)	KAT	CAST	On demand	Manually
SHA2-256 (A6152)	KAT	CAST	On demand	Manually
SHA2-256 (A6156)	KAT	CAST	On demand	Manually
SHA2-256 (A6159)	KAT	CAST	On demand	Manually
SHA2-384 (A6152)	KAT	CAST	On demand	Manually
SHA2-384 (A6156)	KAT	CAST	On demand	Manually
SHA2-384 (A6159)	KAT	CAST	On demand	Manually
SHA2-512 (A6152)	KAT	CAST	On demand	Manually
SHA2-512 (A6156)	KAT	CAST	On demand	Manually
SHA2-512 (A6159)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A6152)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A6156)	KAT	CAST	On demand	Manually
HMAC-SHA2-224 (A6159)	KAT	CAST	On demand	Manually
HMAC-SHA2-256 (A6152)	KAT	CAST	On demand	Manually
HMAC-SHA2-256 (A6156)	KAT	CAST	On demand	Manually
HMAC-SHA2-256 (A6159)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A6152)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A6156)	KAT	CAST	On demand	Manually
HMAC-SHA2-384 (A6159)	KAT	CAST	On demand	Manually
HMAC-SHA2-512 (A6152)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
HMAC-SHA2-512 (A6156)	KAT	CAST	On demand	Manually
HMAC-SHA2-512 (A6159)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A6152)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A6154)	KAT	CAST	On demand	Manually
AES-ECB - Encrypt (A6157)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A6152)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A6154)	KAT	CAST	On demand	Manually
AES-ECB - Decrypt (A6157)	KAT	CAST	On demand	Manually
AES-CBC - Encrypt (A6152)	KAT	CAST	On demand	Manually
AES-CBC - Encrypt (A6154)	KAT	CAST	On demand	Manually
AES-CBC - Encrypt (A6157)	KAT	CAST	On demand	Manually
AES-CBC - Decrypt (A6152)	KAT	CAST	On demand	Manually
AES-CBC - Decrypt (A6154)	KAT	CAST	On demand	Manually
AES-CBC - Decrypt (A6157)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A6152)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A6154)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A6155)	KAT	CAST	On demand	Manually
AES-GCM - Encrypt (A6157)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
AES-GCM - Encrypt (A6158)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A6152)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A6154)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A6155)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A6157)	KAT	CAST	On demand	Manually
AES-GCM - Decrypt (A6158)	KAT	CAST	On demand	Manually
AES-CMAC (A6152)	KAT	CAST	On demand	Manually
AES-CMAC (A6154)	KAT	CAST	On demand	Manually
AES-CMAC (A6157)	KAT	CAST	On demand	Manually
KDF SP800-108 (A6152)	KAT	CAST	On demand	Manually
KDF TLS (A6152)	KAT	CAST	On demand	Manually
TLS v1.2 KDF RFC7627 (A6152)	KAT	CAST	On demand	Manually
KDF IKEv2 (A6153)	KAT	CAST	On demand	Manually
PBKDF (A6152)	KAT	CAST	On demand	Manually
Hash DRBG (A6152)	KAT	CAST	On demand	Manually
KAS-FFC-SSC Sp800-56Ar3 (A6152)	KAT	CAST	On demand	Manually
KAS-ECC-SSC Sp800-56Ar3 (A6152)	KAT	CAST	On demand	Manually
RSA SigGen (FIPS186-5) (A6152)	KAT	CAST	On demand	Manually

Algorithm or Test	Test Method	Test Type	Period	Periodic Method
RSA SigVer (FIPS186-5) (A6152)	KAT	CAST	On demand	Manually
ECDSA SigGen (FIPS186-5) (A6152)	KAT	CAST	On demand	Manually
ECDSA SigVer (FIPS186-5) (A6152)	KAT	CAST	On demand	Manually
RSA KeyGen (FIPS186-5) (A6152)	PCT	PCT	On demand	Manually
ECDSA KeyGen (FIPS186-5) - SSC (A6152)	PCT	PCT	On demand	Manually
ECDSA KeyGen (FIPS186-5) - SigGen/SigVer (A6152)	PCT	PCT	On demand	Manually
Safe Primes Key Generation (A6152)	PCT	PCT	On demand	Manually

Table 25: Conditional Periodic Information

10.4 Error States

Name	Description	Conditions	Recovery Method	Indicator
Power-On Error	An error occurred during the self-tests executed on power-on	Software integrity test failure or CAST failure	Restart of the module	Module will not load
PCT Error	An error occurred during a PCT	PCT failure	Restart of the module	Module stops functioning (sftk_fatalError is set to TRUE)

Table 26: Error States

In any error state, the output interface is inhibited, and the module accepts no more inputs or requests.

10.5 Operator Initiation of Self-Tests

The software integrity tests and CASTs can be invoked on demand by unloading and subsequently re-initializing the module. The PCTs can be invoked on demand by requesting the Key Pair Generation service.

11 Life-Cycle Assurance

11.1 Installation, Initialization, and Startup Procedures

The module is delivered as part of the following RPM packages:

- libfreebl3-3.101.2-150400.3.54.1
- libsoftokn3-3.101.2-150400.3.54.1

Before these packages are installed, the SUSE Linux Enterprise 15 SP6 system must operate in the FIPS validated configuration. This can be achieved by:

- Adding the `fips=1` option to the kernel command line during the system installation. During the software selection stage, do not install any third-party software.
- Switching the system into the FIPS validated configuration after the installation. Execute the `fips-mode-setup --enable` command. Restart the system.

In both cases, the Crypto Officer must verify the system operates in the FIPS validated configuration by executing the `fips-mode-setup --check` command, which should output “FIPS mode is enabled.”

After completion of the above-mentioned system configuration steps, the `libfreebl3-3.101.2-150400.3.54.1` and `libsoftokn3-3.101.2-150400.3.54.1` RPM packages can be installed using the “zypper install” command.

11.2 Administrator Guidance

After the RPM packages are installed, the Crypto Officer must execute the “Show name and version” service by accessing the `CKA_NSS_VALIDATION_MODULE_ID` attribute of the `CKO_NSS_VALIDATION` object in the default slot. The object attribute must contain the value:

SUSE Linux Enterprise NSS 3.101.2-150400.3.54.1

Finally, the Crypto Officer must observe operational environment configuration settings and restrictions as specified in Section 6.2 to ensure the module is running in a validated operational environment.

To operate as the FIPS 140-3 validated module, the output of the `fips-mode-setup --check` command must be “FIPS mode is enabled.” and the “Show Name and Version” service must match the values specified above. If either output differs, the module cannot be considered as the FIPS 140-3 validated module.

11.3 Non-Administrator Guidance

There is no non-administrator guidance.

11.4 End of Life

As the module does not persistently store SSPs, secure sanitization of the module consists of unloading the module. This will zeroize all SSPs in volatile memory. Then, if desired, both the `libfreebl3-3.101.2-150400.3.54.1` and `libsoftokn3-3.101.2-150400.3.54.1` RPM packages can be uninstalled from the SUSE Linux Enterprise 15 SP6 system.

12 Mitigation of Other Attacks

12.1 Attack List

Timing attacks on RSA

- RSA blinding: timing attack on RSA was first demonstrated by Paul Kocher in 1996, who contributed the mitigation code to our module. Most recently Boneh and Brumley showed that RSA blinding is an effective defense against timing attacks on RSA.
 - Specific Limit: None

Cache-timing attacks on the modular exponentiation operation used in RSA

- Cache invariant module exponentiation: this is a variant of a modular exponentiation implementation that Colin Percival showed to defend against cache-timing attacks
 - Specific Limit: this mechanism requires intimate knowledge of the cache line sizes of the processor. The mechanism may be ineffective when the module is running on a processor whose cache line sizes are unknown.

Arithmetic errors in RSA signatures

- Double-checking RSA signatures: arithmetic errors in RSA signatures might leak the private key. Ferguson and Schneier recommend that every RSA signature generation should verify the signature just generated.
 - Specific Limit: None

Appendix A. Glossary and abbreviations

AES	Advanced Encryption Standard
API	Application Programming Interface
CAST	Cryptographic Algorithm Self-Test
CAVP	Cryptographic Algorithm Validation Program
CBC	Cipher Block Chaining
CKG	Cryptographic Key Generation
CMAC	Cipher-based Message Authentication Code
CMVP	Cryptographic Module Validation Program
CSP	Critical Security Parameter
CTR	Counter
CTS	Ciphertext Stealing
DH	Diffie-Hellman
DRBG	Deterministic Random Bit Generator
ECB	Electronic Code Book
ECC	Elliptic Curve Cryptography
ECDH	Elliptic Curve Diffie-Hellman
ECDSA	Elliptic Curve Digital Signature Algorithm
FFC	Finite Field Cryptography
FIPS	Federal Information Processing Standards
GCM	Galois Counter Mode
HKDF	HMAC-based Key Derivation Function
HMAC	Keyed-Hash Message Authentication Code
IKE	Internet Key Exchange
KAS	Key Agreement Scheme
KAT	Known Answer Test
KBKDF	Key-based Key Derivation Function
KW	Key Wrap
KWP	Key Wrap with Padding
MAC	Message Authentication Code
NIST	National Institute of Science and Technology
PAA	Processor Algorithm Acceleration
PAI	Processor Algorithm Implementation

© 2026 SUSE LLC/atsec information security corporation.

This document can be reproduced and distributed only whole and intact, including this copyright notice.

PCT	Pair-wise Consistency Test
PBKDF2	Password-based Key Derivation Function v2
PKCS	Public-Key Cryptography Standards
PSS	Probabilistic Signature Scheme
RSA	Rivest, Shamir, Addleman
SHA	Secure Hash Algorithm
SSC	Shared Secret Computation
SSP	Sensitive Security Parameter
TLS	Transport Layer Security
XOF	Extendable Output Function

Appendix B. References

FIPS 140-3	FIPS PUB 140-3 - Security Requirements For Cryptographic Modules March 2019 https://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.140-3.pdf
FIPS 140-3 IG	Implementation Guidance for FIPS PUB 140-3 and the Cryptographic Module Validation Program 18 April 2025 https://csrc.nist.gov/csrc/media/Projects/cryptographic-module-validation-program/documents/fips 140-3/FIPS 140-3 IG.pdf
FIPS 180-4	Secure Hash Standard (SHS) August 2015 https://doi.org/10.6028/NIST.FIPS.180-4
FIPS 186-2	Digital Signature Standard (DSS) July 2013 https://csrc.nist.gov/files/pubs/fips/186-2/final/docs/fips186-2.pdf
FIPS 186-4	Digital Signature Standard (DSS) July 2013 https://doi.org/10.6028/NIST.FIPS.186-4
FIPS 186-5	Digital Signature Standard (DSS) February 2023 https://doi.org/10.6028/NIST.FIPS.186-5
FIPS 197	Advanced Encryption Standard May 2023 https://doi.org/10.6028/NIST.FIPS.197-upd1
FIPS 198-1	The Keyed Hash Message Authentication Code (HMAC) July 2008 https://doi.org/10.6028/NIST.FIPS.198-1
FIPS 202	SHA-3 Standard: Permutation-Based Hash and Extendable-Output Functions August 2015 https://doi.org/10.6028/NIST.FIPS.202
PKCS#1	Public Key Cryptography Standards (PKCS) #1: RSA Cryptography Specifications Version 2.2 November 2016 https://www.rfc-editor.org/rfc/rfc8017.txt

RFC 3526	More Modular Exponential (MODP) Diffie-Hellman groups for Internet Key Exchange (IKE) May 2003 https://www.ietf.org/rfc/rfc3526.txt
RFC 5288	AES Galois Counter Mode (GCM) Cipher Suites for TLS August 2008 https://www.ietf.org/rfc/rfc5288.txt
RFC 7919	Negotiated Finite Field Diffie-Hellman Ephemeral Parameters for Transport Layer Security (TLS) August 2016 https://www.ietf.org/rfc/rfc7919.txt
RFC 8446	The Transport Layer Security (TLS) Protocol Version 1.3 August 2018 https://www.ietf.org/rfc/rfc8446.txt
SP 800-38A	Recommendation for Block Cipher Modes of Operation Methods and Techniques December 2001 https://doi.org/10.6028/NIST.SP.800-38A
SP 800-38A Addendum	Recommendation for Block Cipher Modes of Operation: Three Variants of Ciphertext Stealing for CBC Mode October 2010 https://doi.org/10.6028/NIST.SP.800-38A-Add
SP 800-38B	Recommendation for Block Cipher Modes of Operation: The CMAC Mode for Authentication May 2005 https://doi.org/10.6028/NIST.SP.800-38B
SP 800-38D	Recommendation for Block Cipher Modes of Operation: Galois/Counter Mode (GCM) and GMAC November 2007 https://doi.org/10.6028/NIST.SP.800-38A
SP 800-38F	Recommendation for Block Cipher Modes of Operation: Methods for Key Wrapping December 2012 https://doi.org/10.6028/NIST.SP.800-38F
SP 800-52 Rev. 2	Guidelines for the Selection, Configuration, and Use of Transport Layer Security (TLS) Implementations August 2019 https://doi.org/10.6028/NIST.SP.800-52r2

SP 800-56A Rev. 3	Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography April 2018 https://doi.org/10.6028/NIST.SP.800-56Ar3
NIST SP 800-57 Part 1 Rev. 5	Recommendation for Key Management: Part 1 – General May 2020 https://doi.org/10.6028/NIST.SP.800-57pt1r5
SP 800-90A Rev. 1	Recommendation for Random Number Generation Using Deterministic Random Bit Generators June 2015 https://doi.org/10.6028/NIST.SP.800-90Ar1
SP 800-90B	Recommendation for the Entropy Sources Used for Random Bit Generation January 2018 https://doi.org/10.6028/NIST.SP.800-90B
SP 800-108 Rev. 1	NIST Special Publication 800-108 - Recommendation for Key Derivation Using Pseudorandom Functions August 2022 https://doi.org/10.6028/NIST.SP.800-108r1-upd1
SP 800-132	Recommendation for Password-Based Key Derivation - Part 1: Storage Applications December 2010 https://doi.org/10.6028/NIST.SP.800-132
SP 800-133 Rev. 2	Recommendation for Cryptographic Key Generation June 2020 https://doi.org/10.6028/NIST.SP.800-133r2
SP 800-135 Rev. 1	Recommendation for Existing Application-Specific Key Derivation Functions December 2011 https://doi.org/10.6028/NIST.SP.800-135r1